



KING TONY

Enjoy your work


2024

GARAGE CATALOGUE

HYDRAULIC AND LIFTING



4500KG

KING TONY

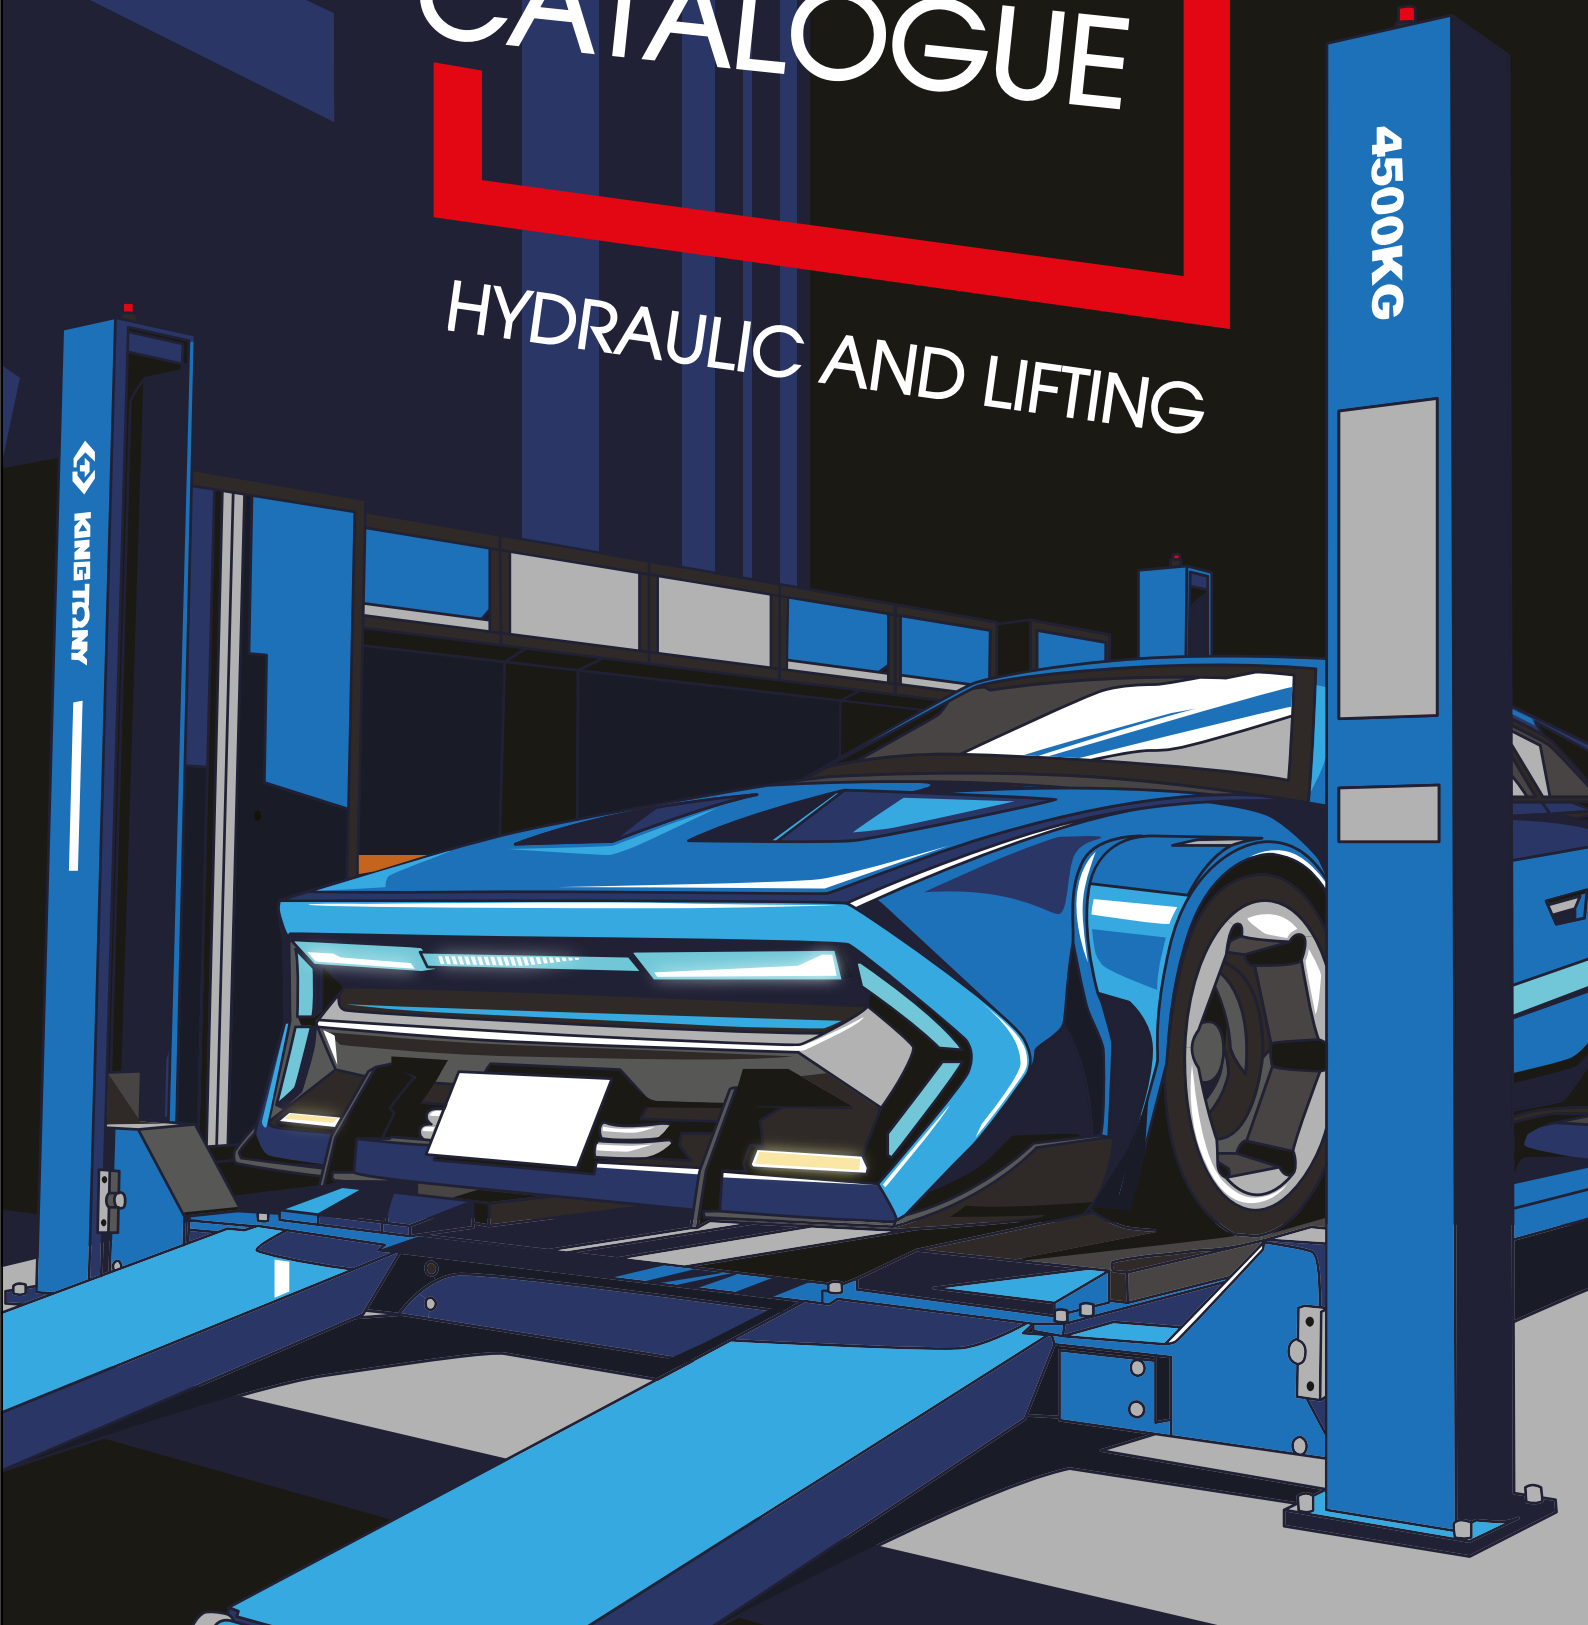

**New****PNEUMATIC DRAINER AND OIL COLLECTOR**

Air Pressure (bar) : 6 ~ 8

**9TVP180AB****550 €** D**AIR SUCTION - OIL DRAINER**

2 drain modes :

- 1) Direct suction: Fast action, via the gauge well. Ensure the oil tank is under negative pressure. No need to lift the vehicle and to remove the oil extractor.

Plexiglass analysis tank transparent with graduation, designed to easily visualize the condition of the extracted oil and the volume (9 L).

- 2) By gravity (under deck elevator or pit) : Convenient, thanks to the large collecting funnel oil and adjustable in height.

	Oil tank capacity (liters)	Minimum height (mm)	Maximum height (mm)	kg
--	----------------------------	---------------------	---------------------	----

9TVP180AB	80 L	1/4"	40-60°C	26.1
------------------	------	------	---------	------

UNIVERSAL LEVER**9BH1000****199 €** D**FRONT AXLE LEVER BAR**

Avoids dismantling the spindle or the wishbone.
Manual assembly, simple, fast and safe.
Suitable for all cars and light commercial vehicles.

	Capacity (kg)	Minimum height (mm)	Length (mm)	Width (mm)	kg
--	---------------	---------------------	-------------	------------	----

9BH1000	200	300	1000	130	6
----------------	-----	-----	------	-----	---

ENGINE STAND


Allows balancing the weight to ease handling and positioning of the engine.

9TY621AB**45 €** B**ENGINE LEVELER**

Balance adjustment by hand crank. Comes with 4 support chains.
Compatible with workshop cranes 9HYGR11 / 9HYGR55 / 9HYGR20.

	Capacity (kg)	Length (mm)	kg
--	---------------	-------------	----

9TY621AB	680	400	5.5
-----------------	-----	-----	-----

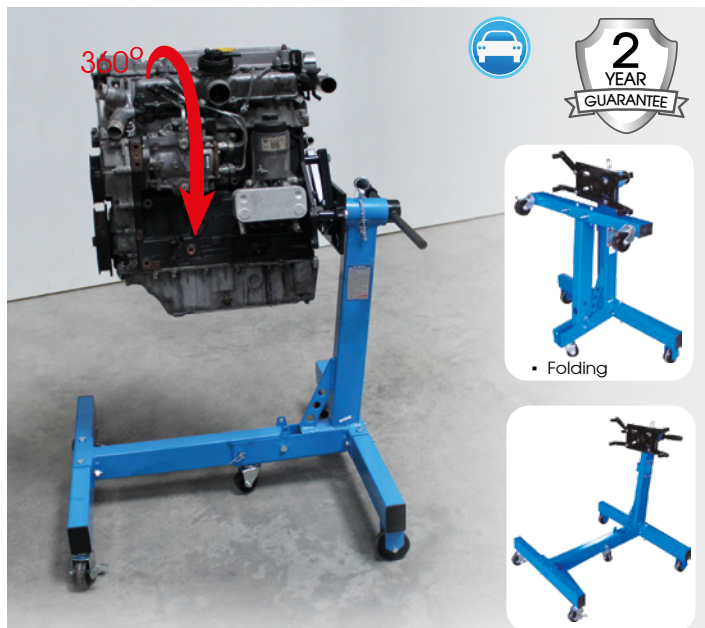

9TY135150AB

239€^B

ENGINE STAND

For working on disassembled engines. 4 adjustable arms (distance and inclination). Support pivots 360°. 5 wheels, including 3 guide wheels, and 2 brakes.

	Capacity (kg)	Minimum height (mm)	Length (mm)	Width (mm)	
9TY135150AB	680	880	870	825	33




9TY61105AB

157€^B

ENGINE SUPPORT

Easily supports the engine while removing the Transmission. Adjustable pad. The rubber pad prevents sliding while operation.

	Capacity (kg)	Length (mm)	
9TY61105AB	500 kg	1500	22

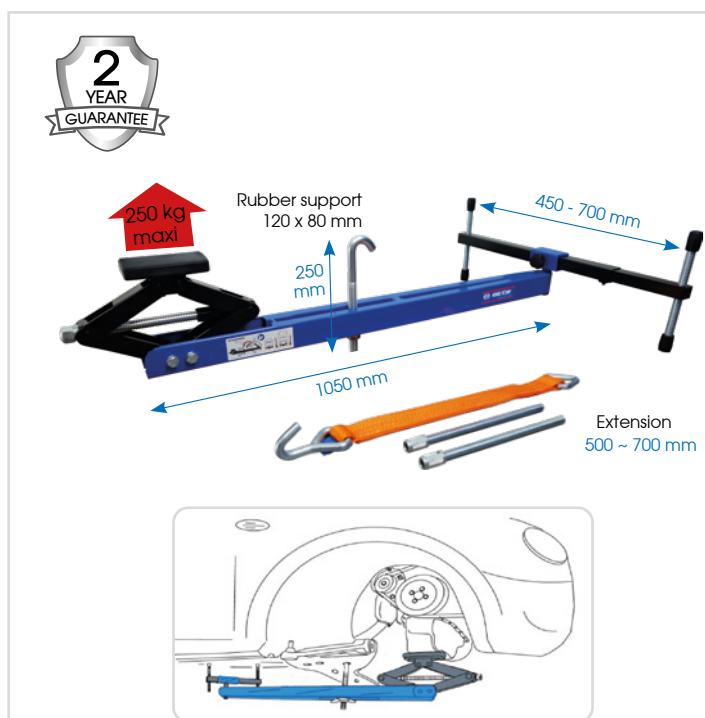

9BJ2070

499€^B

ENGINE SUPPORT

Provides engine or gearbox support when servicing cars and light commercial vehicles.

	Capacity (kg)	Height (mm)	Length (mm)	Width (mm)	
9BJ2070	250	120 ~ 260	1060	310	12



9TYVS1

390€^B

SUPPORT SADDLE

Designed to facilitate the dismantling and positioning of the gearbox on cars and light commercial vehicles.


	Capacity (kg)	Height (mm)	Length (mm)	Width (mm)	
9TYVS1	150	300	450	310	8



Always support the vehicle on axle stands before working under it.
Never stay in or get on a raised vehicle or under one held only by a jack.

HYDRAULIC - LIFTING

AXLE STANDS



9TY321

SET OF 2 STANDARD AXLE STANDS

Robust for maximum stability and life.
Adjustable height.

	Capacity (Ton)	Minimum height (mm)	Maximum height (mm)	kg	
9TY32103A	3 T	375	555	4.45	66 € ^D
9TY32105A	5 T	395	665	11.4	194 € ^D



9TY332

SET OF 2 SCREW TYPE AXLE STANDS

Easy to use axle stands. Quickly and precisely adjust the height using the screw. Suitable for almost all types of vehicle.
Robust for maximum stability and a long service life.

	Capacity (Ton)	Minimum height (mm)	Maximum height (mm)	kg	
9TY33220AB	20 T	420	680	54	649 € ^D
9TY33221AB	20 T	665	1170	75	849 € ^D

New



9TYE342

SET OF 2 RATCHETING AXLE STANDS

	Capacity (Ton)	Minimum height (mm)	Maximum height (mm)	Pair weight (kg)	
9TYE34203AB	3 T	291	430	6.8	52 € ^D
9TYE34206AB	6 T	390	610	12.6	115 € ^D

- Welded steel for more safety & robustness.
- Adjustable height.

New



9TYE351

SET OF 2 AXLE STANDS BASE SQUARE

	Capacity (Ton)	Minimum height (mm)	Maximum height (mm)	Pair weight (kg)	
9TYE35112AB	12 T	300	450	40.4	225 € ^D
9TYE35122AB	22 T	311	505	64	265 € ^D

New



HANDLING TROLLEY



9TYE721AB

284 € ^D

SET OF 2 HANDLING TROLLEYS

Lifting of the vehicle thanks to a pedal.
4 swivel wheels for easy movement in all directions.

	Capacity (kg)	Distance between rolls (mm)	Pair weight (kg)
9TYE721AB	680/trolley	375 - 725	28



Always support the vehicle on axle stands before working under it.
Never stay in or get on a raised vehicle or under one held only by a jack.

TRANSMISSION JACKS



Structure
GUARANTEED 5 YEARS
Hydraulic system
GUARANTEED 2 YEARS




9TYN1436

TRANSMISSION JACK

2-speeds plastic handle.
Pedal with rubber coating.
Dust protection. Double pumps.
Fiberglass and nylon wheel.
Chrome-plated piston rod for long service life.
Safety overload valve.

	Capacity (kg)	Minimum height (mm)	Maximum height (mm)	kg	
9TYN143603AB	300	1140	2000	28.1	359 € D
9TYN143606AB	600	1146	1986	34.8	439 € D
9TYN143610AB	1000	1170	2010	39.8	509 € D

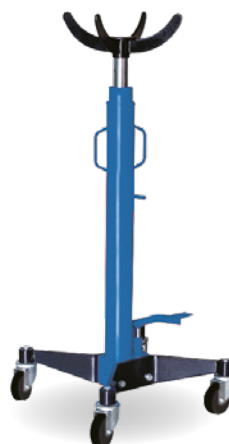

9TY145

527 € D

TRANSMISSION JACK

Handle for easy adjustment.
Safety overload valve.
Pedal for hydraulic control.
Strong steel base.
Nylon wheels.

Structure
GUARANTEED 5 YEARS
Hydraulic system
GUARANTEED 2 YEARS

	Capacity (kg)	Minimum height (mm)	Maximum height (mm)	kg
9TY145015AB	1500	1130	1915	55.5

New

LIFTING TABLES

New

- Hydraulic lifting by pedal and progressive lowering by joystick allowing the platform to stop at the desired height.
- Easy to move thanks to its chrome hoop.
- Made of high strength steel.
- Safety valve built into the hydraulic cylinder to prevent overloading.

Structure
GUARANTEED 5 YEARS
Hydraulic system
GUARANTEED 2 YEARS



9TYC11

SINGLE SCISSOR HYDRAULIC LIFTING TABLE

	Capacity (kg)	Minimum height (mm)	Maximum height (mm)	kg	
9TYC11015AB	150	225	740	44	329 € D
9TYC11050AB	500	340	900	87	499 € D

Structure
GUARANTEED 5 YEARS
Hydraulic system
GUARANTEED 2 YEARS



9TYC12

SINGLE SCISSOR HYDRAULIC LIFTING TABLE

	Capacity (kg)	Minimum height (mm)	Maximum height (mm)	kg	
9TYC12035AB	350	350	1300	105	599 € D



1.5 t



Noiseless wheels



Quick-lift pedal

9TYC1101500

1995 € D

HYDRAULIC LIFTING TABLE

Allows lifting, lowering and possibly moving over short distances loads weighing up to 1.5 tonnes.
"Quick-lift" pump pedal for a quick approach.

Structure
GUARANTEED 5 YEARS
Hydraulic system
GUARANTEED 2 YEARS

	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	kg
9TYC1101500	1.5 T	210	880	130



BOTTLE JACKS



HYDRAULIC BOTTLE JACK WITH SINGLE LIFT ARM AND EXTENSION SCREW

All models can be used from -20°C to 70°C
Can also be used horizontally as a pressure cylinder
The piston pump must be placed below the jack
Integrated safety valve. Galvanised pump handle.
With a raised column to fully benefit from the length of the extension



	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	Hydraulic lifting (mm)	Column (mm)	kg	
9TY111035A	3.5 T	172	372	112	88	3,7	69€ B
9TY11105A	5 T	212	468	146	110	4,9	73€ B
9TY11110A	10 T	220	483	148	115	7,3	109€ B
9TY11115A	15 T	231	498	154	113	9,8	131€ B
9TY11120A	20 T	241	521	165	115	13,1	160€ B


PNEUMATIC BALLOON JACKS

New



9TYN24102AB

2 STAGE PNEUMATIC BALLOON JACK (2 T)

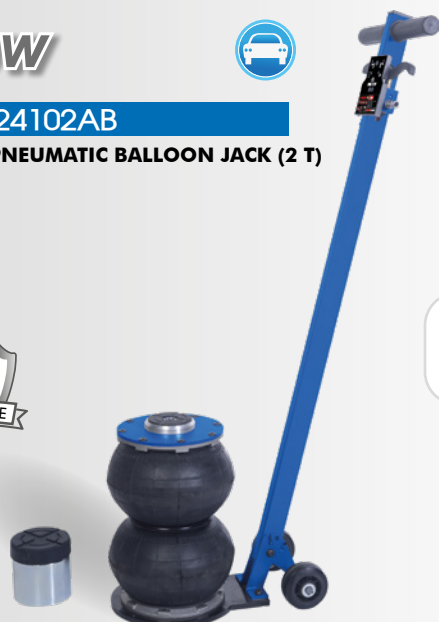

HIGH CONTROL

2 Triggers :
1 for lifting, 1 for releasing.

New



9TYN24202AB

3 STAGE PNEUMATIC BALLOON JACK (2 T)



New



9TYN24302AB

2 STAGE PNEUMATIC BALLOON JACK (2 T)



LOW CONTROL

2 Triggers :
1 for lifting, 1 for releasing.

New



9TYN24402AB

3 STAGE PNEUMATIC BALLOON JACK (2 T)



The balloon jacks are compact, easy to use while offering a large lifting range.

	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	kg	
9TYN24102AB	2 T	115	350	18	595€ D
9TYN24202AB	2 T	200	500	19,84	676€ D
9TYN24302AB	2 T	115	350	15	569€ D
9TYN24402AB	2 T	200	500	17	638€ D

- Safety valve.
- 4 thickness membrane.
- Cylinder guide ring for smooth operation and long service life.
- Automatic reminder switch with ergonomic design, safe and easy to use.



HYDRAULIC JACKS

New



9TYE13110AB

1090 € D

HYDRAULIC TROLLEY JACK

Speed control. Safety valve to avoid overloading.

	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	kg
9TYE13110AB	10 T	160	685	133



New




9TYE13120AB

2539 € D

HYDRAULIC TROLLEY JACK

Speed control. Safety valve to avoid overloading.

	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	kg
9TYE13120AB	20 T	185	620	241

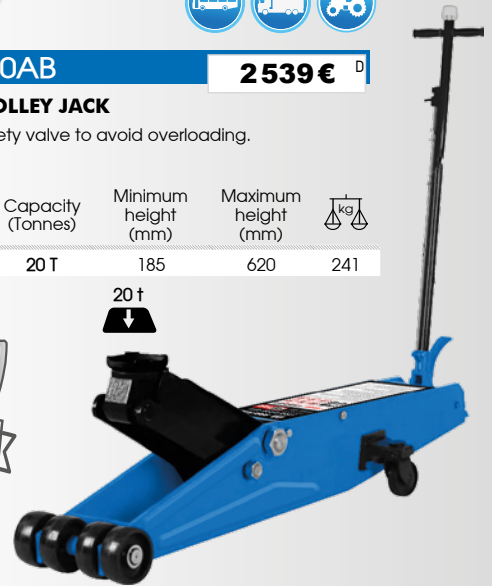

New



9TYN13

HYDRAULIC TROLLEY JACK

Handle with dead man device (automatic turning handle). Ergonomic handle with 2 hands.

	Capacity (Ton)	Minimum height (mm)	Maximum height (mm)	Weight (kg)	
9TYN13302AB	2 T	75	500	32.9	329 € D
9TYN13303AB	3 T	95	515	39.5	359 € D



9TY133A25AB


273 € B



HYDRAULIC TROLLEY JACK



	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	kg
9TY133A25AB	2.5 T	90	530	33.8



New



9TYN13402AB

379 € D

HYDRAULIC TROLLEY JACK

The low profile is suitable for more types of vehicles. Handle with dead man device (automatic turning handle).

	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	kg
9TYN13402AB	2 T	75	530	42.2



New




9TYN13102AB

509 € D

HYDRAULIC TROLLEY JACK

Handle with dead man device (automatic turning handle). Ergonomic handle with 2 hands.

	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	kg
9TYN13102AB	2 T	85	780	54.18

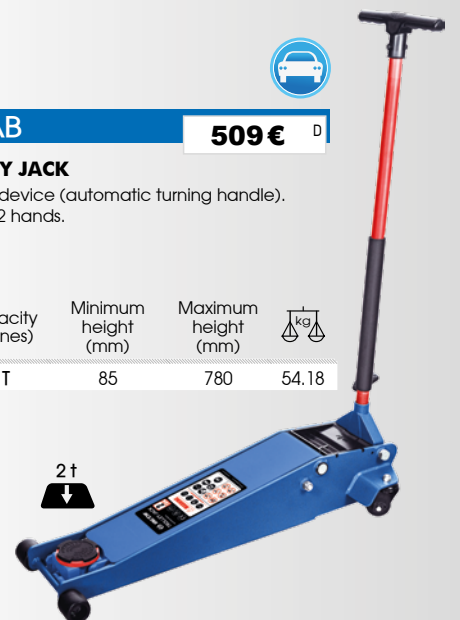



AIR HYDRAULIC JACKS

New



9TYN231

SINGLE STAGE AIR HYDRAULIC JACK

Slowdown valve.
Overload safety valve.
Automatic reminder switch for safe work.
With 2 extensions (9TYN23130AB : 45 and 100 mm,
9TYN23160AB : 100 and 200 mm).

- Supply pressure (bar) : 9 ~ 12

	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	kg	
9TYN23130AB	30 T	360	772	86	2 165 € D
9TYN23160AB	60 T	420	1031	126	2 790 € D



9TYN23130AB



9TYN23160AB

New



9TYN23

2-STAGE AIR HYDRAULIC JACK

Slowdown valve.
Overload safety valve.
Automatic reminder switch for safe work.
With 2 extensions (45 and 75 mm).

- Supply pressure (bar) : 9 ~ 12

	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	kg	
9TYN23125AB	10/25 T	183	494	49	1 599 € D
9TYN23150AB	25/50 T	215	564	67	1 769 € D
9TYN23260AB	40/60 T	220	580	82	2 090 € D



9TYN23125AB



9TYN23150AB



9TYN23260AB

New



9TYN23250AB


1 819 € D

3-STAGE AIR HYDRAULIC JACK

Slowdown valve.
Overload safety valve.
Automatic reminder switch for safe work.
With 2 extensions (45 and 75 mm).

- Supply pressure (bar) : 9 ~ 12

	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	kg
9TYN23250AB	15/30/50 T	150	432	56

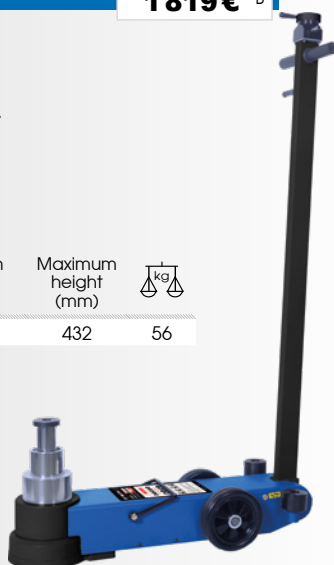

New



9TYN23330AB

1 395 € D

PORTABLE AIR HYDRAULIC JACK

Ideal for on road repairs.
Slowdown valve.
Overload safety valve.
With 2 extensions (45 and 75 mm).

- Supply pressure (bar) : 9 ~ 12

	Capacity (Tonnes)	Minimum height (mm)	Maximum height (mm)	kg
9TYN23330AB	15/30 T	150	413	32





HYDRAULIC PRESS



9TYN51420AB 1725 € | **9TYN51430AB 2159 €** | **9TYN51450AB 2989 €** | **9TYN514A0AB 6320 €**



V block and 180° configuration

Sliding cylinder with handle and positioning scale

Winch protection cover

Winch handle support

Handle support



Pulley protective cover

Pulley protection cover for hand safety

Pulley protective cover

Screw extension

Punch set

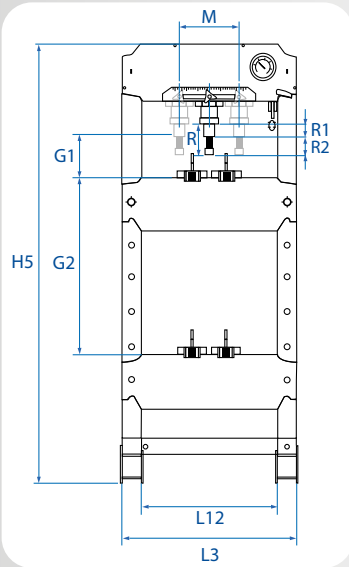

SINGLE STAGE AIR HYDRAULIC JACK

Safety valve.
Pneumatic and manual double speed pump.
Pneumatic foot pedal.
Swivel handle and handle support for winch.
Ergonomics handle & Handle holder.

Supply pressure (bar) : 9 ~ 12



Capacity (ton)	D (mm)	E (mm)	G1 (mm)	G2 (mm)	R2 (mm)	R1 (mm)	R (mm)	M (mm)	Width L3 (mm)	Height H5 (mm)	Width between feet L12 (mm)	kg	
9TYN51420AB	20 T	152	505	25	850	75	145	220	200	770	1800	600	132
9TYN51430AB	30 T	200	535	130	830	75	145	220	280	930	1900	750	210
9TYN51450AB	50 T	200	535	80	780	75	145	220	280	930	1900	750	249.20
9TYN514A0AB	100 T	280	750	185	855	-	-	300	360	1255	1938	850	677



To be installed on the work surface.

- Screen made of polycarbonate with high impact resistance.
- Maximizes operator safety.

Compatible with



9TYN51420P01A	9TYN51420AB	5	120 €
9TYN51430P01A	9TYN51430AB	6	128 €
9TYN51450P01A	9TYN51450AB	6	128 €
9TYN514A0P01A	9TYN514A0AB	12.75	284 €



The pin set can be installed on the frame of the press.

3.5

9TYN514A0P02A 97 €


PRESS TOOL KIT


Different capacity included in the set 2t, 3t, 6t, 8t, 10t, 12t, 13t, and 15t.


9TYN51420AB / 9TYN51430AB / 9TYN51450AB / 9TYN514A0AB

Capacity (ton)	Length (mm)	Ø (mm)
2 T	60	10
3 T	60	12
6 T	60	16
8 T	85	18
10 T	85	20
12 T	85	22
13 T	110	25
15 T	108	30



 kingtonyeurope.com

 service-clients@kingtony.eu

 +33 5 49 30 33 27



catalog.kingtony.eu