



EN  
€

**2025**  
**AUTHENTIC POWER**



**Cordless | Pneumatic Solutions**



## GUARANTEE

M7 offers a 2 year guarantee on its pneumatic and electric tools. 3 years warranty on the Cordless power tools bodies. Start boosters, chargers and power tool batteries are guaranteed for 1 year. Consumables are not guaranteed. The guarantee covers hidden defects and manufacturing faults. An item is only covered by the guarantee if it has been used correctly and for the purpose for which it was designed. The guarantee does not cover normal wear and tear caused by intense use or use over time.

## BRAND STORY

M7® is more than just an air tool manufacturer. M7® now provides a complete solution for all users. With a powerful international network of experts in power tools and pneumatics covering 68 countries, and several decades of experience in industry, the M7® brand created in 2006 draws its strength from its multidisciplinary approach. M7® works tirelessly on the development and improvement of its tools to continue to offer ergonomic and powerful tools while ensuring quality monitoring and excellent service.







## **m7** POWER

|  |       |
|--|-------|
| Battery & smart charger 18V 5Ah.....         | 7     |
| Power Tool packs M7 18V 5Ah.....             | 8-9   |
| Cordless impact wrenches 18V 5Ah.....        | 10-11 |
| Cordless impact drivers 18V 5Ah.....         | 12-13 |
| Cordless impact driver 10.8V 2Ah.....        | 13    |
| Cordless drill drivers 18V 5Ah.....          | 14    |
| Cordless reciprocating saw 18V 5Ah.....      | 15    |
| Cordless jig saw 18V 5Ah.....                | 16    |
| Cordless circular saw 18V 5Ah.....           | 16    |
| Cordless oscillating multi-tool 18V 5Ah..... | 17    |
| Cordless heat gun 18V 5Ah.....               | 17    |
| Cordless rivet gun 18V 5Ah.....              | 18    |
| Cordless rotary hammer 18V 5Ah.....          | 18    |
| Cordless angle grinder 18V 5Ah.....          | 19    |
| Cordless orbital sander 18V 5Ah.....         | 20    |
| Cordless grease gun 18V 5Ah.....             | 21    |
| Cordless LED floodlights 18V 5Ah.....        | 21    |
| Cordless pressure washer 18V 5Ah.....        | 22    |
| Cordless vacuum blower 18V 5Ah.....          | 22    |
| Cordless leaf-blower 18V 5Ah.....            | 23    |
| Cordless backpack sprayer 18V 5Ah.....       | 23    |
| Cordless 4 in 1 gardening tool 18V 5Ah.....  | 24    |
| Cordless hedge trimmer 18V 5Ah.....          | 24    |
| Cordless hedge trimmer 18V 5Ah.....          | 25    |
| Cordless pruning chainsaw 18V 5Ah.....       | 25    |

## **m7** BOOST

|                       |       |
|-----------------------|-------|
| Mini boosters.....    | 27    |
| Start boosters.....   | 28-29 |
| Battery chargers..... | 30-31 |
| Battery testers.....  | 32    |

## **m7** AIR

|                                      |       |
|--------------------------------------|-------|
| Mini pneumatic tools.....            | 34-35 |
| Pneumatic impact wrenches.....       | 36-39 |
| Pneumatic ratchets.....              | 40-41 |
| Pneumatic grinders.....              | 42    |
| Pneumatic micro die grinders.....    | 43    |
| Pneumatic angle grinders.....        | 43    |
| Pneumatic grinders.....              | 43    |
| Pneumatic sanders and polishers..... | 44    |
| Pneumatic belt sanders.....          | 45    |
| Pneumatic screwdrivers.....          | 45    |
| Pneumatic drills.....                | 46    |
| Pneumatic riveters.....              | 47    |
| Pneumatic needle scalars.....        | 48    |
| Pneumatic shears and saws.....       | 48    |
| Pneumatic hammers.....               | 49    |
| Pneumatic grease guns.....           | 49    |
| Pneumatic blowguns.....              | 50    |

## **m7** AUTO

## **m7** GARAGE

|                                    |    |
|------------------------------------|----|
| Maintenance.....                   | 57 |
| Filter regulators lubricators..... | 57 |
| Pneumatic systems.....             | 58 |
| Cable reels.....                   | 59 |
| Extractors.....                    | 59 |
| Workshop organization.....         | 60 |
| Torque wrenches.....               | 61 |

## **m7** ACCESSORIES



## M7 POWER



DC18DB50P2

279 € D 07



M7PACKV10

933 € D 09



M7PACKV11

1119 € D 09



M7PACKV12

1369 € D 09



DS203K

165 € D 13



DS203A

434 € D 13



DWL102

121 € D 21



DDWV104KIT

155 € D 22



DLB102

107 € D 23



DGS101

139 € D 23



DGM101

129 € D 24



DGM101SET

334 € D 24



DST101

158 € D 24



DHT101

85 € D 25



DCCS101

139 € D 25

## M7 BOOST



STBAT3

287 € D 27



BC122407

114 € D 30




STG5

85 € D 31



STG10

168 € D



STG15

218 € D



STT3

126 € D 32



STT13

458 € D 32

## M7 AIR



NEO104KIT

186 € B 34



NE271

118 € B 34



NE371

118 € B 34



QC113

125 € B 35



QA102A

86 € B 35



## m7 AIR



**QA602A**

125 € B



**QE102**

153 € B



**QE902**

103 € B



**NC6610G**

301 € B



**QB7215M**

316 € B



## m7 GARAGE



**SV2260**

98 € B



**GTA201030**

359 € B

**GTA306135**

369 € B

**GTA417340**

449 € B

**GTA610100**

1455 € B



**GDI406060**

489 € B



**GDI434340**

555 € B



**GBI406060**

609 € B



**GBI434340**

675 € B

## m7 ACCESSORIES



**DGM901**

65 € D



**DGM902**

39 € D



**DGM903**

79 € D



**DGM904**

54 € D



**DDWV900F**

17,50 € B



**DDWV902**

13,50 € B



**DDWV903**

2,50 € B



**DDWV904**

6 € B



**QEHSS11325**

50,40 € B



**QEHSSC25**

126,60 € B



**DRH7516**

64 € B



**DJS901P**

2,90 € B



**DGD202610P**

48 € B



**DGD200451P**

128 € B



**SC33C**

53,10 € B



**SY461M**

13,60 € B



**DGD202618P**

48 € B

**DGD202626P**

48 € B

**DGD210229P**

105 € B

**SC34C**

56,30 € B





# POWER



**Motor**

***BRUSHLESS***

- No friction between the carbon brushes and the manifold (no more sparks at the engine outlet).
- Reduces the heat produced increasing the motor's lifespan.
- No friction to preserve the energy produced by the engine.
- Longer battery life.
- Less wear parts.



# ELECTROPORTABLE EFFICIENCY AT YOUR SERVICE

**18 V  
5 Ah**

## SMART CHARGER

|  |                                 |  |                  |
|--|---------------------------------|--|------------------|
|  | TOO HIGH OR TOO LOW TEMPERATURE |  | BATTERY CHARGING |
|  | DEFFECTIVE BATTERY OR CHARGER   |  | CHARGING DONE    |



## QUICK CHARGING TIME 50 MINUTES

*A fully discharged battery will fully charge in 50 minutes at an ambient temperature between 0 °C and 40 °C.*

□ BATTERY CHARGE LEVEL LED INDICATOR

□ SANYO LITHIUM-ION BATTERY CELLS  
+ Charging faster than a standard battery.  
+ No memory effect  
+ Longer lifespan.  
+ No power loss.  
+ Lighter.



**DC1840A**  
SMART CHARGER  
Compatible with DB1850P

76€ D



**18 V - 5Ah  
DB1850P**  
BATTERY

116€ D

**NEW**

## DC18DB50P2

279€ D



DC1840A + 2x DB1850P



# THE PACKS **m7**

**5Ah / 18V**
**M7PACKV1**
**1/2" AND 3/4"**
**899 €**
**D**
**POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH AND 3/4" IMPACT WRENCH**

- 1 1/2" compact impact wrench (DW401)
- 1 3/4" compact impact wrench + 1 case + 2 batteries + 1 charger (DW601A)


**5Ah / 18V**
**M7PACKV2**
**1/2"**
**559 €**
**D**
**POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH AND ANGLE GRINDER**

- 1 1/2" compact impact wrench + 1 case + 2 batteries + 1 charger (DW401A)
- 1 angle grinder (DG585)


**5Ah / 18V**
**M7PACKV3**
**1/2" AND 3/4"**
**1009 €**
**D**
**POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH, 3/4" IMPACT WRENCH AND ANGLE GRINDER**

- 1 1/2" compact impact wrench (DW401)
- 1 3/4" impact wrench + 1 case + 2 batteries + 1 charger (DW601A)
- 1 angle grinder (DG585)


**5Ah / 18V**
**M7PACKV4**
**1/2" AND 3/4"**
**978 €**
**D**
**POWER TOOL PACK WITH 1/2" IMPACT WRENCH, 3/4" IMPACT WRENCH**

- 1 1/2" impact wrench + 1 case + 2 batteries + 1 charger (DW18502A)
- 1 3/4" impact wrench (DW601)





**NEW**

**5Ah / 18V  
M7PACKV6**

**1/2"**

781 €

D

**POWER TOOL PACK WITH 1/2" IMPACT WRENCH, DRILL DRIVER AND ANGLE GRINDER**

- 1 1/2" impact wrench + 1 case + 2 batteries + 1 charger (DW18502A)
- 1 drill driver (DD101)
- 1 angle grinder (DG585)



**5Ah / 18V  
M7PACKV10**

**1/2"**

933 €

D

**POWER TOOL PACK WITH 1/2" IMPACT WRENCH, DRILL DRIVER AND ANGLE GRINDER**

- 1 1/2" impact wrench + 1 case (DW406K)
- 1 drill driver (DD101)
- 1 angle grinder (DG501)
- 1 pack: 2 batteries + 1 charger (DC18DB50P2)



**NEW**

**5Ah / 18V  
M7PACKV11**

**1/2"**

1119 €

D

**POWER TOOL PACK WITH 1/2" IMPACT WRENCH, DRILL DRIVER, ANGLE GRINDER AND GREASE GUN**

- 1 1/2" impact wrench + 1 case (DW406K)
- 1 drill driver (DD101)
- 1 angle grinder (DG501)
- 1 cordless grease gun + 1 case (DGG102K)
- 1 pack: 2 batteries + 1 charger (DC18DB50P2)



**NEW**

**5Ah / 18V  
M7PACKV12**

**1/2"**

1369 €

D

**POWER TOOL PACK**

- 1 hammer drill driver (DH101)
- 1 impact Driver + 1 case (DS202K)
- 1 reciprocating saw (DRS101)
- 1 circular saw (DCS101)
- 1 angle grinder (DG501)
- 1 LED floodlight (DFL101)
- 1 pack: 2 batteries + 1 charger (DC18DB50P2)
- 1 battery (DB1850P)





**1/2" M6-M16**  
**813 Nm**

CORDLESS COMPACT IMPACT WRENCH



**3** speeds  
clockwise rotation



**3 auto-stop modes**  
to limit the tightening torque.



**Electric brake**  
Instant stop when the trigger is released.



**Motor**  
**BRUSHLESS**



**DW401**

179 €

D

Without charger nor battery.



DW401

**DW401A**

448 €

D



+



+

2x

DB1850P

+

DC1840A



**1/2" M6-M16**  
**900 Nm**

CORDLESS COMPACT IMPACT WRENCH



**Smart stop function\***  
when loosening



**4** speeds  
clockwise rotation



**Electric brake**  
Instant stop when the trigger is released.



**Motor**  
**BRUSHLESS**



**DW404K**

138 €

D

Without charger nor battery.



+



DW404

**DW404A**

407 €

D



+



+

2x

DB1850P


+

DC1840A

|        | Battery power | Square drive | Bolt size | Max. Torque | Free speed                       | Blows frequency                   | Tightening battery life | Loosening battery life | Weight |
|--------|---------------|--------------|-----------|-------------|----------------------------------|-----------------------------------|-------------------------|------------------------|--------|
|        | Ah - V        | Inch         | mm        | Nm          | R.P.M                            | Blows per minutes                 | minutes                 | minutes                | kg     |
|        |               |              |           |             |                                  | bpm                               |                         |                        |        |
| DW401  | 5 Ah - 18 V   | 1/2"         | M6-M16    | 813         | 0-1100 / 0-1600 / 0-2200         | 0-1500 / 0-2500 / 0-3000          | 83                      | 71                     | 1.48   |
| DW404K | 5 Ah - 18 V   | 1/2"         | M6-M16    | 900         | 0-900 / 0-1400 / 0-1800 / 0-2200 | 0-1150 / 0-1700 / 0-2300 / 0-2500 | 100                     | 100                    | 1.16   |

\* Loose-stop function: once the bolt/nut is loosened, the speed slows down and the rotation stops after about one second, to prevent the bolt from falling.





## CORDLESS IMPACT WRENCHES 18V 5AH

1/2"

M6-M24  
1220 Nm

LIMITED  
QUANTITY!

### CORDLESS IMPACT WRENCH



**Electric brake**  
Instant stop when the  
trigger is released.



**DW1840**

249 €

D

Without charger nor battery.



DW1840

**DW18502A**

518 €

D



+ DW1840



+ 2x DB1850P



+ DC1840A

1/2"

M10-M25  
1600 Nm

### CORDLESS IMPACT WRENCH



**Smart stop function\***  
when loosening



**3 speeds**  
clockwise rotation



**Electric brake**  
Instant stop when the  
trigger is released.



**Motor**  
**BRUSHLESS**



**DW406K**

279 €

D

Without charger nor battery.



DW406

**DW406A**

548 €

D



+ DW406



+ 2x DB1850P



+ DC1840A

3/4"

M10-M27  
1900 Nm

### CORDLESS IMPACT WRENCH



**Reduced vibrations**  
The Motor part is connected to  
the handle by anti-vibration  
silent blocks.



**3 speeds**  
clockwise rotation



**Electric brake**  
Instant stop when the  
trigger is released.



**Motor**  
**BRUSHLESS**



**DW601**

500 €

D

Without charger nor battery.



DW601

**DW601A**

769 €

D



+ DW601



+ 2x DB1850P



+ DC1840A

|        | Battery power | Square drive | Bolt size | Max. Torque | Free speed               | Blows frequency          | Tightening battery life | Loosening battery life | Weight |
|--------|---------------|--------------|-----------|-------------|--------------------------|--------------------------|-------------------------|------------------------|--------|
|        | Ah - V        | Inch         | mm        | Nm          | R.P.M                    | Blows per minutes        | minutes                 | minutes                | kg     |
|        |               |              |           |             |                          |                          |                         |                        |        |
| DW1840 | 5 Ah - 18 V   | 1/2"         | M6-M24    | 1220        | 1900                     | 2200                     | 62                      | 62                     | 2.53   |
| DW406K | 5 Ah - 18 V   | 1/2"         | M10-M25   | 1600        | 0-1400 / 0-1900 / 0-2400 | 0-1800 / 0-2200 / 0-2800 | 57                      | 57                     | 2.00   |
| DW601  | 5 Ah - 18 V   | 3/4"         | M10-M27   | 1900        | 0-900 / 0-1000 / 0-1800  | 0-1800 / 0-2000 / 0-2200 | 46                      | 44                     | 3.37   |



**1/4"** **M2-M12**  
**203 Nm**

**CORDLESS IMPACT DRIVER**



**Circular LED strips**  
at the tip for better visibility of  
the work area.



**3 speeds**  
clockwise rotation



**3 auto-stop modes**  
to limit the tightening  
torque.



**Electric brake**  
Instant stop when the  
trigger is released.



**Motor**  
**BRUSHLESS**



**DS201** **139 €** **D**

Without charger nor battery.



DS201

**DS201A** **408 €** **D**



**1/4"** **M5-M12**  
**270 Nm**

**CORDLESS IMPACT DRIVER**



**4 functions:**  
1. For wood  
2. For thin iron sheet  
3. For thick iron sheet  
4. Smart stop function\*



**Smart stop function\***  
when loosening



**Motor**  
**BRUSHLESS**



**DS202K** **171 €** **D**

Without charger nor battery.



DS202

**DS202A** **440 €** **D**



|        | Battery power | Max. Torque | Chuck diameter | Bolt size | Blows frequency                  | Length | Free speed                       | Battery life | Weight |
|--------|---------------|-------------|----------------|-----------|----------------------------------|--------|----------------------------------|--------------|--------|
|        | Ah - V        | Nm          | Inch           | mm        | Blows per minutes                | mm     | R.P.M                            | minutes      | kg     |
|        |               |             |                |           | <b>bpm</b>                       |        |                                  |              |        |
| DS201  | 5 Ah - 18 V   | 203         | 1/4"           | M2-M12    | 0 - 1200<br>0 - 2350<br>0 - 3300 | 147    | 0 - 1100<br>0 - 1900<br>0 - 2800 | 60           | 1.28   |
| DS202K | 5 Ah - 18 V   | 270         | 1/4"           | M5-M12    | 0 - 4000                         | 110    | 0 - 3200                         | 68           | 1.0    |

\*Loose-stop function: once the screw or bolt or nut is loosened, the speed slows down and the rotation stops after about one second, to prevent it from falling.



**NEW**

**1/4" 1/2"** **M5-M12**  
**270 Nm**  
**583 Nm**

**CORDLESS 1/4" IMPACT DRIVER / 1/2" IMPACT WRENCH**



**Circular LED strips**  
at the tip for better visibility of the work area.



**4 speeds**  
clockwise rotation



**4 functions:**  
1. For wood  
2. For thin iron sheet  
3. For thick iron sheet  
4. Smart stop function\*



**Smart stop function\***  
when loosening



**Electric brake**  
Instant stop when the trigger is released.



**Motor**  
**BRUSHLESS**



**DS203K**

165 €

D

Without charger nor battery.



DS203

**DS203A**

434 €

D



+ DS203

+

2x DB1850P

+

DC1840A

|        | Battery power | Chuck diameter | Max. torque unscrewing | Screwing torque         | Square drive | Max. loosening torque | Tightening torque        | Bolt size | Blows frequency                      | Length | Free speed                           | Weight |
|--------|---------------|----------------|------------------------|-------------------------|--------------|-----------------------|--------------------------|-----------|--------------------------------------|--------|--------------------------------------|--------|
|        | Ah - V        | Inch           | Nm                     | Nm                      | Inch         | Nm                    | Nm                       | mm        | Blows per minutes                    | mm     | R.P.M                                | kg     |
|        |               |                |                        |                         |              |                       |                          |           |                                      |        |                                      |        |
| DS203K | 5 Ah - 18 V   | 1/4"           | 270                    | 68<br>108<br>203<br>271 | 1/2"         | 583                   | 190<br>244<br>380<br>542 | M5 - M12  | 0-1400<br>0-1800<br>0-3500<br>0-4000 | 125    | 0-1200<br>0-1900<br>0-2500<br>0-3200 | 1.0    |

## CORDLESS IMPACT DRIVER 10.8V 2AH



**2Ah**  
**10.8/**  
**12V**



**1/4" M4-M12**  
**2Ah / 100 Nm**

**DS10202**

191 €

D

**CORDLESS IMPACT DRIVER**  
Quick charge takes 30 minutes.  
2 batteries + 1 charger included.



**2Ah DB1020**  
**10.8V/20V, 2AH BATTERY**  
Suitable for DS10202

57 €

D



**DC10A**  
**BATTERY CHARGER**  
For Battery DB1020

41 €

D

|         | Battery power | Chuck size | Bolt size | Max. Torque | Free speed | Blows frequency   | Battery life | Weight |
|---------|---------------|------------|-----------|-------------|------------|-------------------|--------------|--------|
|         | Ah - V        | Inch       | mm        | Nm          | R.P.M      | Blows per minutes | minutes      | kg     |
|         |               |            |           |             |            |                   |              |        |
| DS10202 | 2Ah - 10.8V   | 1/4"       | M4 - M12  | 100         | 0 - 2200   | 0 - 3000          | 103          | 1.0    |




**90 Nm**
**CORDLESS DRILL DRIVER**


**Impulse function** ideal for drilling on a painted surface and to replace damaged screws.

**23 + 1**

release positions

drilling position


**2** speeds


Metal chuck, self-tightening and self-locking.



**Motor**  
**BRUSHLESS**



Removable bit holder and belt hook.  
1 side handle.

**DD101**
**179 €**
**D**

Without charger nor battery.



DD101

**DD101A**
**448 €**
**D**


+ DD101 + 2x DB1850P + DC1840A

**90 Nm**
**CORDLESS HAMMER DRILL DRIVER**

3 modes: Screwdriver / Drill / Hammer drill.



**Impulse function** ideal for drilling on a painted surface and to replace damaged screws.

**24 + 1**

release positions


**2** speeds


Metal chuck, self-tightening and self-locking.



**Motor**  
**BRUSHLESS**



Removable bit holder and belt hook.  
1 side handle.

**DH101**
**184 €**
**D**

Without charger nor battery.



DH101

**DH101A**
**453 €**
**D**


+ DH101 + 2x DB1850P + DC1840A

|       | Battery power | Drilling capacity       | Chuck diameter | Blows frequency       | Tightening control | Max. Torque | Free speed          | Battery life | Weight |
|-------|---------------|-------------------------|----------------|-----------------------|--------------------|-------------|---------------------|--------------|--------|
|       | Ah - V        | mm                      | mm             | Blows per minutes     |                    | Nm          | R.P.M               | minutes      | kg     |
|       |               |                         |                | bpm                   |                    |             |                     |              |        |
| DD101 | 5 Ah - 18 V   | Wood : 60<br>Metal : 13 | 13             | -                     | 23+1               | 90          | 0 - 500<br>0 - 2000 | 51           | 1.37   |
| DH101 | 5 Ah - 18 V   | Wood : 60<br>Metal : 13 | 13             | 0 - 6500<br>0 - 24000 | 25                 | 90          | 0 - 450<br>0 - 1750 | 51           | 1.45   |





## CORDLESS RECIPROCATING SAW

Bevel Gear Drive System.  
Tool-less Blade Change.  
Variable-Speed Trigger Switch.  
Adjustable shoe length and inclination.  
Selector Lever: straight cutting action / orbital cutting action.  
This reciprocating saw has the option of orbit action to make the blade swing slightly as it cuts, for a maximum cutting efficiency.



**Electric brake**  
quickly stops the blade rotation  
when the trigger is released.



**Motor**  
**BRUSHLESS**

**DRS101**

239 €

D

Without charger nor battery.



DRS101

Consumables not available



## CORDLESS COMPACT RECIPROCATING SAW

Safety locking button.  
Tool-less Blade Change.



**Electric brake**  
quickly stops the blade rotation  
when the trigger is released.



**Motor**  
**BRUSHLESS**

### THE PERKS :

- 1 HAND WORK
- COMPACT : 336MM (W/O BATTERY)
- LIGHT : 1,78KG

**DRS102**

179 €

D

Without charger nor battery.



DRS102

**DRS102AB**

448 €

D



BA80129



DRS102



2x DB1850P



DC1840A

Consumables not available

|        | Battery power | Cutting capacities       | Stroke length | Strokes per minute | Length | Battery life | Weight |
|--------|---------------|--------------------------|---------------|--------------------|--------|--------------|--------|
|        | Ah - V        | mm                       | mm            | S.P.M              | mm     | minutes      | kg     |
|        |               |                          |               | <b>S.P.M</b>       |        |              |        |
| DRS101 | 5 Ah - 18 V   | Wood : 200<br>Metal : 20 | 29            | 3100               | 410    | 31           | 2.7    |
| DRS102 | 5 Ah - 18 V   | Wood : 160<br>Metal : 16 | 25            | 3100               | 336    | 40           | 1.78   |



**CORDLESS JIG SAW**

Speed variator trigger for precise speed control.  
Compatible with "T" and "U" shank Jigsaw blades (not included).  
Adjustable base beveling from 0 - 45 degrees (left/right).  
4-Position orbital action for smooth cutting in a variety of materials.  
Ideal for sawing wood, aluminum and steel.  
Storage of the blades in the base of the saw.

226 x 209 x 75 mm



**Electric brake**  
quickly stops the blade rotation  
when the trigger is released.



Cutting angle  
until 45°

**DJS101**

167 €

D

Without charger nor battery.



DJS101

**DJS101AB**

436 €

D



BA80129



DJS101



2x DB1850P



DC1840A

Consumables not available

|        | Battery power | Cutting Capacity                                | Stroke length | Strokes per minute | Length | Battery life | Weight |
|--------|---------------|---|---------------|--------------------|--------|--------------|--------|
|        | Ah - V        | mm  | mm            | S.P.M              | mm     | minutes      | kg     |
|        |               |   |               | <b>S.P.M</b>       |        |              |        |
| DJS101 | 5 Ah - 18 V   | Wood : 63.5<br>Aluminium : 9.53<br>Steel : 6.35 | 25.4          | 2200               | 226    | 62           | 2.7    |

**CORDLESS CIRCULAR SAW**

Heavy duty, light and durable aluminum base.  
Ergonomic design with soft grip handles for comfort and control.



**Electric brake**  
quickly stops the blade rotation  
when the trigger is released.



185 MM



**Motor**  
**BRUSHLESS**



Cutting angle  
45° or 90°

**DCS101**

299 €

D

Without charger nor battery.



DCS101

**DCS101AB**

568 €

D



BA80129



DCS101



2x DB1850P



DC1840A

Consumables not available

|        | Battery power | Free speed | Shank Opening | Spindle size | Cutting Capacity 45° | Cutting Capacity 90° | Bevel Capacity | Stroke length | Length | Battery life | Weight |
|--------|---------------|------------|---------------|--------------|----------------------|----------------------|----------------|---------------|--------|--------------|--------|
|        | Ah - V        | RPM        | mm            | mm           | mm                   | mm                   | degrees        | mm            | mm     | minutes      | kg     |
|        |               |            |               |              | <b>45°</b>           | <b>90°</b>           |                |               |        |              |        |
| DCS101 | 5 Ah - 18 V   | 4500       | 185           | 20           | 46                   | 60.5                 | 0 - 56         | 25.4          | 330    | 50           | 3.63   |

## CORDLESS OSCILLATING MULTI-TOOL

The oscillating multi-tool is offering a large versatility for the following uses :

- Ideal for the sawing and the cutting of wood, steel, plastic or plasterboard.
- Useful for scraping silicone, tile joints, paint or adhesive.
- Suitable for sanding narrow spaces such corners.

Anti-Vibration System for a more comfortable work.  
Fast blade replacement without tool.  
Oscillation angle : 1.8° right & left.



**6** speeds



Motor  
**BRUSHLESS**



SPEED VARIATOR



**DOM101**

207 €

D

Without charger nor battery.



DOM101

**DOM101A1**

402 €

D



DOM101

DB1850P

DC1840A

QK131K4

QK131K3

QK131K5

QK131K6

#60

#120

#180

|        | Battery power | Strokes per minute | Oscillation angle | Length (without battery) | Sound level | Vibration level  | Battery life | Weight |
|--------|---------------|--------------------|-------------------|--------------------------|-------------|------------------|--------------|--------|
|        | Ah - V        | S.P.M              | degrees           | mm                       | dBA         | m/s <sup>2</sup> | minutes      | kg     |
|        |               |                    |                   |                          |             |                  |              |        |
| DOM101 | 5 Ah - 18 V   | 11000/18000        | 1.8               | 320                      | 80.6        | 1.9              | 81           | 1.04   |

## CORDLESS HEAT GUN

60 seconds up to max. temperature.  
Stable temperature (overheat prevention).  
Quick release collar to safely and easily remove nozzle accessories.  
Lock-off feature prevents accidental start up ensuring safety to the user.  
Including 3 nozzles (reflector nozzle, flat nozzle and reduction nozzle) .  
Application: Shrinking, Bending tube, Removing Stickers and more...



Includes



**DHG101**

103 €

D

Without charger nor battery.



DHG101

|        | Battery power | Air Flow | Max. Temperature | Length | Battery life | Weight |
|--------|---------------|----------|------------------|--------|--------------|--------|
|        | Ah - V        | L / min  | °C               | mm     | minutes      | kg     |
|        |               |          |                  |        |              |        |
| DHG101 | 5 Ah - 18 V   | 200      | 550              | 220    | 23           | 0.63   |





### CORDLESS RIVET GUN

Supplied with O-ring to hold the rivet.  
Nozzles included : 2.4mm, 3.2mm, 4.0mm, 4.8mm, 6.4mm.  
Compatible with aluminium, steel, stainless rivets from 2,4 mm to 6,4 mm.  
Battery Life : 1 full charge battery for 100 rivets.



| MATERIAL  |           | RIVET DIAMETER (ØMM) |              |     |              |     |     |
|-----------|-----------|----------------------|--------------|-----|--------------|-----|-----|
| RIVET     | MANDRIN   | (2.5)<br>2.4         | (3.0)<br>3.2 | 4.0 | (5.0)<br>4.8 | 6.4 | 8.0 |
| aluminum  | aluminum  |                      |              |     |              |     |     |
| aluminum  | steel     |                      |              |     |              |     |     |
| steel     | steel     |                      |              |     |              |     |     |
| stainless | steel     |                      |              |     |              |     |     |
| stainless | stainless |                      |              |     |              |     |     |

**DR102K**

563 €

D

Without charger nor battery.



DR102

**DR102A1**

758 €

D



+ DR102 + DB1850P + DC1840A

Consumables not available

|        | Battery power | Capacity  | Traction | Stroke length | Battery life | Weight |
|--------|---------------|-----------|----------|---------------|--------------|--------|
|        | Ah - V        | mm        | Nm       | mm            | minutes      | kg     |
|        |               |           |          |               |              |        |
| DR102K | 5 Ah - 18 V   | 2,4 – 6,4 | 2000     | 27            | 75           | 0.63   |

### CORDLESS ROTARY HAMMER

3 Modes : Drill, Drill + Hammer & Chisel.  
Perfect choice for drilling and chiseling concrete, wood or steel.  
SDS plus Quick-Change Chuck.  
Automatic stop of the rotation when you release the trigger.  
1 side handle.



**DRH101K**

191 €

D

Without charger nor battery.



DRH101

**DRH101A**

460 €

D



+ DRH101 + 2x DB1850P + DC1840A

Consumables not available

|         | Battery power | Free speed | Blows frequency   | Impact Energy | Drilling capacity                     | Sound level | Vibration level  | Battery life                    | Weight |
|---------|---------------|------------|-------------------|---------------|---------------------------------------|-------------|------------------|---------------------------------|--------|
|         | Ah - V        | R.P.M      | Blows per minutes | joules        | mm                                    | dBA         | m/s <sup>2</sup> | minutes                         | kg     |
|         |               |            |                   |               |                                       |             |                  |                                 |        |
| DRH101K | 5 Ah - 18 V   | 1150       | 5100              | 2.6           | Wood: 30<br>Steel: 13<br>Concrete: 26 | 94.3        | 12.7             | Drill: 40<br>Drill + Hammer: 19 | 2.4    |



## CORDLESS ANGLE GRINDER 18V 5AH

### Ø 125 mm CORDLESS ANGLE GRINDER

The protection casing can be adjusted easily and without tools.  
Axis locking button to change the disc easily.  
2 positions handle.  
On/off button, choice between continuous grinding or jolt grinding.



**DG585**

115 €

D

Without charger nor battery.



DG585

**DG585502A**

384 €

D



+



DG585

+



2x DB1850P



DC1840A

Consumables not available



SPEED VARIATOR



### Ø 125 mm CORDLESS ANGLE GRINDER

Spindle lock button for easy disc change.  
1-position on/off button ("dead man's").  
3 positions handle.  
The protection casing can be adjusted easily and without tools.

**DG501**

189 €

D

Without charger nor battery.



DG501

**DG501A**

458 €

D



+



DG501

+



2x DB1850P



DC1840A

Consumables not available

|       | Battery power | Disc diameter | Thread     | Power | Free speed | Length | Autonomie | Weight |
|-------|---------------|---------------|------------|-------|------------|--------|-----------|--------|
|       | Ah - V        | mm            | mm         | W     | R.P.M      | mm     | minutes   | kg     |
|       |               |               |            |       |            |        |           |        |
| DG585 | 5 Ah - 18 V   | 125           | M14        | 600   | 8000       | 285    | 43        | 1.46   |
| DG501 | 5 Ah - 18 V   | 125           | M14 x P2.0 | 900   | 8000       | 320    | 36        | 1.48   |




**Ø125mm / ⦿ 3mm**
**CORDLESS ORBITAL SANDER**

Compatible abrasive disc: 8-hole velcro paper Ø 125 mm.  
Speed variator: 6 speeds.  
Dust collection bag.  
The speed trigger allows to adapt the speed to the type of surface or the work that needs to be done.  
Soft start function.  
Ergonomic handle for more confort and control.


**SPEED VARIATOR**

**DOS501**
**139 €**
**D**

**DOS501**

Without charger nor battery.

**DOS501AB**
**408 €**
**D**

**BA80129**

**DOS501**

**2x DB1850P**

**DC1840A**

Consumables not available.


|        | Battery power | Disc diameter | Free speed   | Orbit | Length | Battery life | Weight |
|--------|---------------|---------------|--------------|-------|--------|--------------|--------|
|        | Ah - V        | mm            | R.P.M        | mm    | mm     | minutes      | kg     |
|        |               |               |              |       |        |              |        |
| DOS501 | 5 Ah - 18 V   | 125           | 7000 - 11000 | 3.0   | 300    | 69           | 1.23   |

**CORDLESS GREASE GUN**

Compatible with standard 400g grease cartridge : DIN1284 & Lube-Shuttle.  
Overpressure protection included.  
LCD screen to control battery level.  
Provided with 1 meter flexible hose & 73 cm strap.


**DGG102K**
**205 €**
**D**

Without charger nor battery.


**DGG102**
**DGG102A1**
**400 €**
**D**

**DGG102**

**DB1850 P**

**DC1840A**

Consumables not available.

|         | Battery power | Length (without battery) | Pressure | Grease flow | Cartridge capacity | Battery life | Weight |
|---------|---------------|--------------------------|----------|-------------|--------------------|--------------|--------|
|         | Ah - V        | mm                       | bar      | ml / min    | g                  | minutes      | kg     |
|         |               |                          |          |             |                    |              |        |
| DGG102K | 5 Ah - 18 V   | 395                      | 482      | 94,6        | 400                | 90           | 2.4    |





**580 lm**  
**CORDLESS LED FLOODLIGHT**  
 360° cordless LED floodlight.  
 3 light modes:  
 • 180° : 450 Lumens (18 hours)  
 • 360° low light : 550 lumens (20 hours)  
 • 360° Max power : 850 lumens (10 hours)


**DFL101**    72€    D

Without charger nor battery.



DFL101

|        | Battery power<br>Ah - V | Sizes<br>(without battery)<br>mm | Brightness<br>lm | Color temperature<br>°kelvin | Battery life<br>hours | Weight<br>kg |
|--------|-------------------------|----------------------------------|------------------|------------------------------|-----------------------|--------------|
| DFL101 | 5 Ah - 18 V             | 75 x 270 x 80                    | 450 / 550 / 850  | 3800 - 4000                  | 10 - 20               | 0.44         |




**NEW**  
 AVAILABLE IN FEBRUARY

**7000 lm**  
**CORDLESS LED FLOODLIGHT**

**DWL102**    121€    D

Without charger nor battery.



DWL102

|        | Battery power<br>Ah - V | Sizes<br>(without battery)<br>mm | Brightness<br>lm | Color temperature | Battery life<br>hours | Weight<br>kg |
|--------|-------------------------|----------------------------------|------------------|-------------------|-----------------------|--------------|
| DWL102 | 5 Ah - 18 V             | 180 x 145 x 440                  | 2 000 / 7 000    | white / warm      | 7.5 / 2.5             | 2.85         |



### CORDLESS PRESSURE WASHER



Water gun utilizes a three-piston pump with super silent anti-vibration technology to clean both quietly yet thoroughly.

Metal Pump with no possible leak of water and oil

Dual trigger system with double click power control to operate at low or high power

**DPW101**

122 €

D

Without charger nor battery.



Accessories included



1 high precision 4-in-1 multi pattern nozzle (rotating turbo nozzle, 20° fixed nozzle, 60° fixed nozzle, 0° pencil jet)



1 foaming nozzle to apply detergent



1 quick-connect 4M water inlet hose for drawing fresh water from any source (a bucket, a pool, a can, a pond etc.)



2 lances of 28,5 cm each or 57 cm total length

|        | Compatible battery   | Water flow | Max pressure | Length | Hose length | Battery life                     | Weight |
|--------|----------------------|------------|--------------|--------|-------------|----------------------------------|--------|
|        | Ah - V               | L / min    | bar          | mm     | M           | minutes                          | kg     |
|        |                      |            |              |        |             |                                  |        |
| DPW101 | DB1850P (18 V, 5 Ah) | 2.8        | 25           | 876    | 4           | High speed: 88<br>Low speed: 124 | 1.72   |

### CORDLESS VACUUM BLOWER

Efficiently vacuums up dust and liquids. Blast mode ideal for clearing debris from confined spaces. Automatic shut-off when water reaches maximum capacity to protect the motor.




Features a HEPA filter that is highly effective against dust and easy to replace.

**NEW**

AVAILABLE IN APRIL

Carrying shoulder strap

3.2-metre telescopic hose



4 rotating wheels



2 power settings :  
- low power (100 W) with a suction power of approx. 9 kPa.  
- full power (200 W) with a suction power of approx. 16 kPa.



**DDWV104KIT**

155 €

D

Without charger nor battery.



|            | Compatible battery   | Suction power | Liquid tank capacity | Dust tank capacity | Battery life | Weight |
|------------|----------------------|---------------|----------------------|--------------------|--------------|--------|
|            | V - Ah               | kPa           | L                    | L                  | minutes      | kg     |
|            |                      |               |                      |                    |              |        |
| DDWV104KIT | DB1850P (18 V, 5 Ah) | 9 / 16        | 8                    | 10                 | 20 / 35      | 4.1    |


**NEW**

## CORDLESS LEAF-BLOWER

Suitable for lawn maintenance, cleaning up dead leaves, dusting and removing snow. 2 clip-on parts air pipe for easy storage and set-up. Can be hung up vertically for convenient storage.



**Motor**  
**BRUSHLESS**



TURBO SPEED switch for a high power operation.

Progressive trigger with a locking switch for a continuous operation.

Ergomic handle with a comfortable grip for easy work.

**DLB102**

107 €

D

Without charger nor battery.



|        | Compatible battery   | Air speed | No-load speed  | Second speed | Air flow        | Dimensions      | Sound level | Vibration level | Battery life | Weight |
|--------|----------------------|-----------|----------------|--------------|-----------------|-----------------|-------------|-----------------|--------------|--------|
|        | V - Ah               | km/h      | R.P.M          | R.P.M        | m³/min          | mm              | dBA         | m/s²            | minutes      | kg     |
|        |                      |           |                |              |                 |                 |             |                 |              |        |
| DLB102 | DB1850P (18 V, 5 Ah) | 162       | 7 100 - 11 600 | 14 000       | 6.5 - 10.7 / 13 | 816 x 166 x 288 | 96          | 0.2             | 12 / 24      | 2.6    |


**NEW**

## CORDLESS BACKPACK SPRAYER

Cordless tool allowing for free movement. 12 liter tank. Backpack model for great comfort even on long sessions.



**Motor**  
**BRUSHLESS**



**DGS101**

139 €

D

Without charger nor battery.



Accessories include:

- 1 telescopic metal lance (100 cm max)
- 1 plastic lance (58 cm)
- 5 nozzles:



single nozzle



bi-directional front and rear nozzles



swirl nozzle



4-hole nozzle



6-hole nozzle


|        | Compatible battery   | Water flow | Max. pressure | Tank capacity | Hose length | Sound level | Vibration level | Weight |
|--------|----------------------|------------|---------------|---------------|-------------|-------------|-----------------|--------|
|        | V - Ah               | l/min      | bar           | L             | cm          | dBA         | m/s²            | kg     |
|        |                      |            |               |               |             |             |                 |        |
| DGS101 | DB1850P (18 V, 5 Ah) | 1.2        | 4.0 / 5.0     | 12            | 124         | 84.6        | < 2.5           | 3.4    |



### 36 V

#### CORDLESS 4 IN 1 GARDENING TOOL


Designed to cut grass, trim bushes, branches or hedges with the same tool. Operates at 36 V for extended autonomy and higher intensity. Equipped with a strap to support the tool to relieve arms and back.

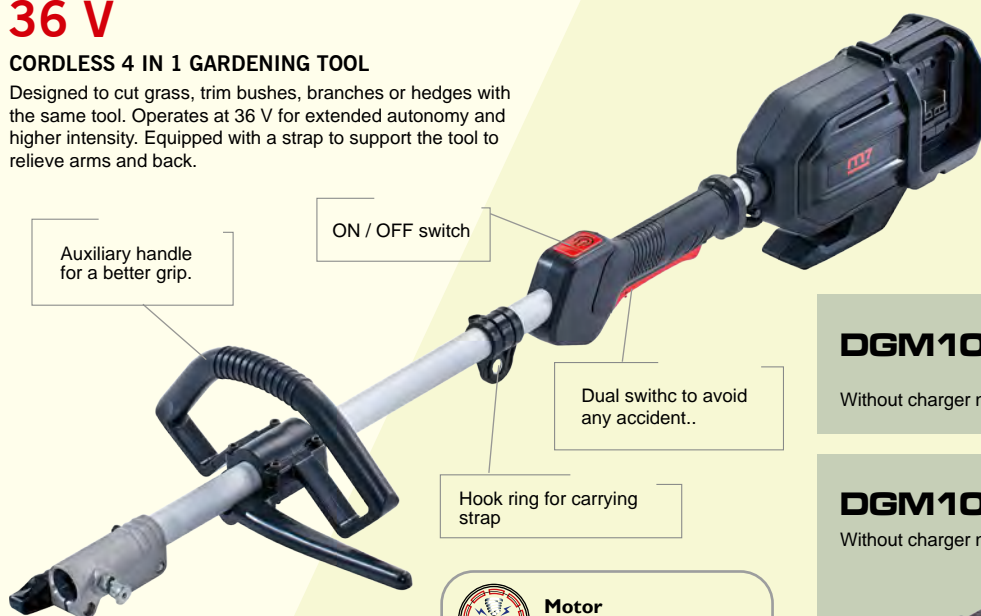

|        | Compatible battery         | No-load speed | Weight |
|--------|----------------------------|---------------|--------|
|        | V - Ah                     | R.P.M         | kg     |
|        |                            |               |        |
| DGM101 | 2x DB1850P (2x 18 V, 5 Ah) | 7 400         | 2.92   |

### NEW

AVAILABLE IN MARCH



#### DGM101

129 €

D

Without charger nor battery.



#### DGM101SET

334 €


D

Without charger nor battery.



#### CORDLESS HEDGE TRIMMER

Best suited for garden, driveways and hedges maintenance. Tap and Go : gently tap head to easily remove the thread. Cordless tool allowing for free movement.

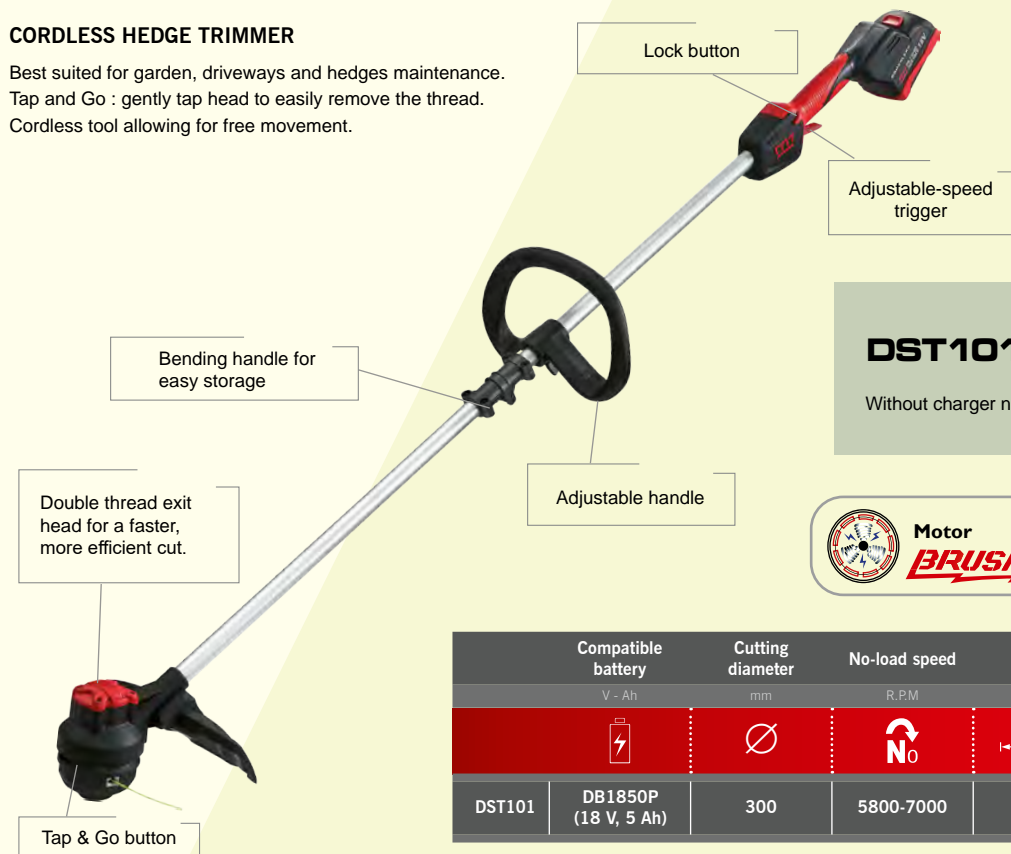

|        | Compatible battery   | Cutting diameter | No-load speed | Length | Autonomy | Weight |
|--------|----------------------|------------------|---------------|--------|----------|--------|
|        | V - Ah               | mm               | R.P.M         | mm     | minutes  | kg     |
|        |                      |                  |               |        |          |        |
| DST101 | DB1850P (18 V, 5 Ah) | 300              | 5800-7000     | 876    | 36       | 2.59   |

### NEW

AVAILABLE IN MARCH

#### DST101

158 €

D

Without charger nor battery.



## CORDLESS HEDGE TRIMMER & PRUNING CHAINSAW 18V 5AH

### CORDLESS HEDGE TRIMMER

Best suited for hedges, bushes and thin branches maintenance.  
45° and 90° handle rotation.  
Built-in battery protection system automatically shuts down motor power to extend battery life.

Handle rotation release button.

Safety guard

Dual switch safety trigger.

**NEW**

AVAILABLE IN APRIL

**DHT101**

85€

D

Without charger nor battery.



|        | Compatible battery   | Shear speed | Cutting length | Cutting capacity - branch ø | No-load speed | Blade length | Teeth spacing | Weight |
|--------|----------------------|-------------|----------------|-----------------------------|---------------|--------------|---------------|--------|
|        | V - Ah               | S.P.M       | mm             | mm                          | R.P.M         | mm           | mm            | kg     |
|        |                      |             |                |                             |               |              |               |        |
| DHT101 | DB1850P (18 V, 5 Ah) | 2 800       | 538            | 19                          | 1 400         | 610          | 26            | 2.6    |

### CORDLESS PRUNING CHAINSAW

Best suited for cutting branches and pruning trees.  
The automatic chain lubrication system creates a smoother efficient cut and extends product lifetime.

Safety trigger with dual switch to avoid unintentional startup

Adjusting SDS chain does not require any tool which is easier to power on and allows for a quicker maintenance and setting.

Chain pitch :  
3/8" LP (9,5 mm)  
Chain type:  
E43-FL-40E

Rubber handle to reduce vibration when working.

Oil indicator allows to check oil level without disassembling

**NEW**

AVAILABLE IN MARCH

**DCCS101**

139€

D

Without charger nor battery.



|         | Compatible battery   | Chain speed | Guide length | Cutting length | Dimensions      | Oil tank capacity | Sound level | Battery life | Weight |
|---------|----------------------|-------------|--------------|----------------|-----------------|-------------------|-------------|--------------|--------|
|         | V - Ah               | m/s         | mm           | mm             | mm              | ml                | dBA         | minutes      | kg     |
|         |                      |             |              |                |                 |                   |             |              |        |
| DCCS101 | DB1850P (18 V, 5 Ah) | 9.3         | 254          | 200            | 451 x 255 x 198 | 120               | 98          | 16           | 2.7    |



Motor  
**BRUSHLESS**





# BOOST



**m7**  
**12 V**  
**START BOOSTER**  
🚗 🚙 🚚 🚛  
**3100 A**  
**PEAK AMPS**  
**1200 A**  
**Cranking Amps**  
2200W/40V  
573100  
CE



## 12V ST450

162 € B

### MULTIFUNCTION MINI BOOSTER

3 in 1



Start booster



LED projector



Powerbank

Crocodile clips for vehicle starting (car, motorbike, small boat, etc.)  
The ST450 can start a vehicle up to 30 times. It depends on the vehicle's engine.

Intelligent battery clamp : low voltage protection, reverse polarity protection, short circuit protection, reverse charging protection, automatic power shut off.

Can be charged from the mains or the cigarette lighter.

Powerbank function: charges all of your portable devices (smartphone, laptop PC, tablet, camera, portable games console, etc.).

Protective storage case.



2x USB-A  
1x USB-C

3-mode LED torch : continuous, flashing and SOS.

LCD display indicates the charge level.



## 12V STBAT3

287 € D

### START BOOSTER AND COMPRESSOR

5 in 1



Start booster



Voltmeter



Compressor



LED projector



Powerbank

**NEW**

PA 2500 A  
CA 1500 A

Presetting tire pressure.

Compressor start-stop button.

Light  
300 lumen



Starting port

Compressor output port.

2x USB-A  
1x USB-C



Working temperature: -20°C ~ 50°C  
In-Output USB C: 5 ~ 20V / 3A PD 60W  
2x Output USB A: 5V/3A - 9V/2A - 12V/1.5A



|        | Battery capacity<br>mAh | Battery capacity<br>Wh | Power supply voltage<br>V | Cranking amps (CA)<br>A | Peak amps (PA)<br>A | Pressure range<br>bar | Starting cable length<br>cm | Charging time<br>hours | Brightness<br>lumen | Dimensions<br>mm | Weight<br>kg |
|--------|-------------------------|------------------------|---------------------------|-------------------------|---------------------|-----------------------|-----------------------------|------------------------|---------------------|------------------|--------------|
|        |                         |                        |                           |                         |                     |                       |                             |                        |                     |                  |              |
| ST450  | 18 000                  | 66.6                   | 12                        | 450                     | 900                 | -                     | -                           | 3 ~ 5                  | -                   | 191x83x34        | 1.3          |
| STBAT3 | 6 166                   | 74                     | 12                        | 1500                    | 2500                | 0.7 - 10.3            | 50                          | ± 1.5                  | 300                 | 251x138x65       | 1.36         |





Cable length

**40 cm**

**12V - 25Ah**  
**ST3100**

426 €

D

Cable length

**114 cm**

**12V - 25Ah**  
**ST3100L**

448 €

D

### START BOOSTER

Designed for professional interventions and repairs.  
High-performance, pure lead AGM battery.  
Colored LEDs indicating the booster's charge level.  
Protection against voltage surges.  
Integrated safety fuse.  
Insulated, brass-made, curved, durable and resistant pliers.  
ABS housing, lightweight and impact resistant.  
• 1 self-regulating automatic charger (220 V) supplied.  
• Number of batteries: 1  
• Fuse on the positive clamp: 500A

**12/24V - 2x25Ah**  
**ST6200**

929 €

D

### START BOOSTER

High-performance, pure lead AGM battery.  
Designed for professional interventions and repairs.  
Perfect to start trucks, agricultural machinery, public works machinery, which require very high starting power in the event of battery failure  
Digital voltmeter indicating the booster's charge level.  
Protection against voltage surges.  
Large insulated, brass-made, durable and resistant pliers.  
ABS housing, lightweight and impact resistant.  
Integrated safety fuse.  
12 V / 24 V / OFF switch.  
Reverse polarity alarm.  
• 1 self-regulating automatic charger (220 V) supplied  
• Number of batteries: 2  
• Fuse on the positive clamp: 500A



REVERSE  
POLARITY ALARM

DIGITAL  
VOLTMETER

**12/24V - 2x33Ah**  
**ST6400**

1429 €

D

### START BOOSTER

High-performance, pure lead AGM battery.  
Designed for professional interventions and repairs.  
Perfect to start trucks, agricultural machinery, public works machinery, which require very high starting power in the event of battery failure.  
Digital voltmeter indicating the booster's charge level.  
Protection against voltage surges.  
Large insulated, brass-made, durable and resistant pliers.  
ABS housing, lightweight and impact resistant.  
Integrated safety fuse.  
12 V / 24 V / OFF switch.  
Reverse polarity alarm.  
• 1 self-regulating automatic charger supplied  
• Number of batteries: 2  
• Fuse on the positive clamp: 500A



REVERSE  
POLARITY ALARM



TELESCOPIC  
HANDLE



DIGITAL  
VOLTMETER



WHEELS

|         | Voltage (DC)    | Cable length | Clamps length | Cable section   | Cranking amps | Peak amps   | Dimensions      | Weight |
|---------|-----------------|--------------|---------------|-----------------|---------------|-------------|-----------------|--------|
|         | V - Ah          | cm           | mm            | mm <sup>2</sup> | A             | A           | mm              | kg     |
|         |                 |              |               |                 |               |             |                 |        |
| ST3100  | 12V - 25Ah      | 40           | 175           | 25              | 1200          | 3100        | 260 x 120 x 330 | 10.93  |
| ST3100L | 12V - 25Ah      | 114          | 175           | 25              | 1200          | 3100        | 260 x 120 x 330 | 11.26  |
| ST6200  | 12/24V - 2x25Ah | 145          | 200           | 50              | 2400 / 1200   | 6200 / 3100 | 310 x 210 x 440 | 23.5   |
| ST6400  | 12/24V - 2x33Ah | 182          | 150           | 50              | 2540 / 1270   | 6400 / 3200 | 360 x 160 x 420 | 39     |

## 12V - 22Ah ST950

449 €

D

### START BOOSTER

Solid electrolyte lead-acid battery (AGM), watertight, in compliance with I.A.T.A safety standards.

Built-in short-circuit fuse in the red clamp protects the booster battery and the vehicle.

Extremely supple start cables of optimum length.

Digital rectangular back-lit voltmeter shows the charge level at a glance.

Completely insulated brass clip and super flexible multicore copper cables.

Protection against power surges.

ON/OFF button.

Can be stored and used in all positions.

20A thermal circuit breaker.

- Clip opening: 30mm
- Number of batteries: 1


LIMITED  
QUANTITY!


- Voltmeter on a LCD backlit screen



## SUPER-CAPACITOR BATTERY-LESS TECHNOLOGY

- > Back to back jump starts without stopping !
- > Ideal for breakdown recovery

## 12V STC1800

1155 €

D

### START BOOSTER WITH A SUPER-CAPACITOR

Meets IATA safety standards.

Entirely insulated brass clips.

160 cm ultra-supple starter cables, made from multi-strand copper.

Negative polarity indicator.

Built-in short-circuit fuse in the red clamp protects the booster battery and the vehicle.

#### SUPER-CAPACITOR ADVANTAGES :

The booster recharges automatically in a few seconds, as soon as the vehicle has been jump started.

Does not contain a battery. This eliminates not only the problem of recharging between 2 jump starts but also problems related to low temperatures.

Reliable and durable.  
Light.



- Voltmeter on a LCD backlit screen



|         | Voltage (DC) | Cable length | Clamps length | Cable section   | Cranking amps | Peak amps | Dimensions      | Weight |
|---------|--------------|--------------|---------------|-----------------|---------------|-----------|-----------------|--------|
|         | V - Ah       | cm           | mm            | mm <sup>2</sup> | A             | A         | mm              | kg     |
|         |              |              |               |                 |               |           |                 |        |
| ST950   | 12V - 22Ah   | 93           | 170           | 25              | 950           | 2500      | 335 x 163 x 415 | 11.5   |
| STC1800 | 12V          | 160          | 170           | 25              | 1800          | 9000      | 335 x 163 x 415 | 9.8    |



**6/12V - 4A**  
**BC1204**

74 €



**12V - 8A**  
**BC1208**

118 €



Charge recovery function.  
13,8V - 5A Power function.

**Li**  
Lithium-compatible

Digital backlit display.



### BATTERY CHARGER

Electronic, digital, multi-stage charging and maintenance charger.  
Protection against polarity reversal and short circuits.  
Fixing hook.  
Ergonomic Design.

#### COMPATIBLE WITH

lead-acid battery



lithium battery



**12/24V - 7A**  
**BC122407**

114 €



### BATTERY CHARGER

The BC122407 Dual Voltage Professional Battery Charger is the ultimate tool for battery charging and maintenance. The adaptive charging process not only ensures that batteries are completely charged but also extends their life with its automatic reconditioning mode. Keep going in all environments due to the IP65 protection system.

**Li**  
Lithium-compatible

**NEW**

1 - 2 - 3 - 4 - 5 - 6 - 7

Multi-step Micro-processor controlled charging



Automatic maintenance mode



Energy efficient



Extends battery life



Protection against sparks



Dust & Water resistant


Recondition mode

Charge status

Supply mode

Mode selection

Voltage

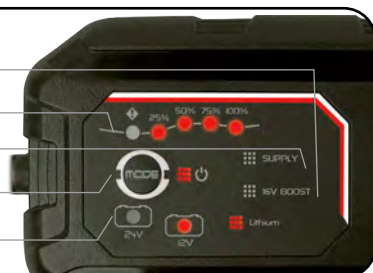

Car charger

|          | Voltage (DC) | Power supply voltage | Frequency | Rated current | Charging and testing stages | Charge capacity | Maintenance capacity | IP degree of protection | Size           | Weight |
|----------|--------------|----------------------|-----------|---------------|-----------------------------|-----------------|----------------------|-------------------------|----------------|--------|
|          | V - mAh      | V                    | Hz        | A             |                             | Ah              | Ah                   |                         | mm             | Kg     |
|          |              |                      |           |               | 1 2 3                       |                 |                      |                         |                |        |
| BC1204   | 6 / 12       | 220 - 240            | 50 - 60   | 1 - 4         | 8                           | 4 - 80          | 4 - 120              | IP65                    | 190 x 80 x 50  | 0.75   |
| BC1208   | 12           | 220 - 240            | 50 - 60   | 2 - 8         | 9                           | 5 - 160         | 5 - 250              | IP65                    | 230 x 100 x 65 | 1      |
| BC122407 | 12 / 24      | 220 - 240            | 50        | 7.0           | 10                          | 14 - 150        | 14 - 225             | IP65                    | 205 x 88 x 51  | 0.748  |



**12V - 5Ah**  
**STG5**

85 €

D

**12V - 10Ah**  
**STG10**

168 €

D

**12/24V - 15Ah**  
**STG15**

218 €

D

#### BATTERY CHARGER

The STG15 is the Ultimate Battery Charging, support and Diagnostic Tool. Combine intelligent charging, maintenance, supply, reconditioning and testing into one simple process with this easy to use Advanced Battery Charger.



Automatic  
maintenance  
mode



Energy  
efficient



Extends  
battery life



Protection  
against sparks



Alternator and  
battery test

#### COMPATIBLE WITH

lead-acid battery



lithium battery



1 2 3 4 5 6 7

Multi-step Micro-processor  
controlled charging

**Li**  
Lithium-  
compatible

**NEW**



|       | Voltage<br>(DC) | Power<br>supply voltage | Frequency | Rated<br>current | Charging and<br>testing stages | Charge capacity | Maintenance<br>capacity | IP degree of<br>protection | Size           | Weight |
|-------|-----------------|-------------------------|-----------|------------------|--------------------------------|-----------------|-------------------------|----------------------------|----------------|--------|
|       | V - Ah          | V                       | Hz        | Ah               |                                | Ah              | Ah                      |                            | mm             | Kg     |
|       |                 |                         |           |                  | 1 2 3                          |                 |                         |                            |                |        |
| STG5  | 12              | 220 - 240               | 50/60     | 5                | 7                              | 1.2 - 110       | 1.2 - 160               | IP65                       | 123 x 123 x 46 | 0.564  |
| STG10 | 12              | 220 - 240               | 50/60     | 10               | 7                              | 24 - 200        | 24 - 250                | IP65                       | 185 x 185 x 68 | 1.3    |
| STG15 | 12/24           | 220 - 240               | 50        | 15 / 7.5         | 7                              | 24 - 300        | 24 - 500                | IP20                       | 190 x 190 x 75 | 1.5    |



**12V**  
**STT3** 126 € **D**

**ADVANCED BATTERY TESTER**

The STT3 12V Advanced Battery Tester is capable of diagnosing issues with a vehicle's electrical system by analyzing each component.

Test the Battery, Alternator, Starter motor accurately and reliably in seconds.



Battery test



Alternator test



Starter test

**COMPATIBLE WITH**

lead-acid battery



lithium battery



**Li**  
Lithium-compatible



Backlit LCD screen

**NEW**

Test report via QR code for mobile display of results.



**12/24V**  
**STT13** 458 € **D**

**BATTERY TESTER WITH INTEGRATED PRINTER**

The STT13 12/24V Advanced Battery Tester is capable of diagnosing issues with a vehicle's electrical system by analyzing each component.

Test the Battery, Alternator, Starter motor and Mass ground accurately and reliably in seconds.



Battery test



Alternator test



Starter test



Weight test

**COMPATIBLE WITH**

lead-acid battery



lithium battery



**Li**  
Compatible lithium



**NEW**



Print the results and scan the QR code to share the test reports.

Integrated Printer.

Colour LCD Screen.


Responsive Touchpad.


Included SD Card.

| Battery capacity | Battery capacity | Power supply voltage | Cranking amps | Peak amps | Pressure range | Starting cable length | Charging time | Brightness | Dimensions | Weight |
|------------------|------------------|----------------------|---------------|-----------|----------------|-----------------------|---------------|------------|------------|--------|
| mAh              | Wh               | V                    | A             | A         | bar            | cm                    | hours         | lumen      | mm         | kg     |
|                  |                  |                      | ⚡             |           | ⏏              |                       |               | kg         |            |        |
| STT3             |                  |                      | 0 - 50        |           | 80 X 80 X 22   |                       |               | 0.2        |            |        |
| STT13            |                  |                      | -             |           | 101 x 240 x 38 |                       |               | 0.693      |            |        |




# m7 AIR

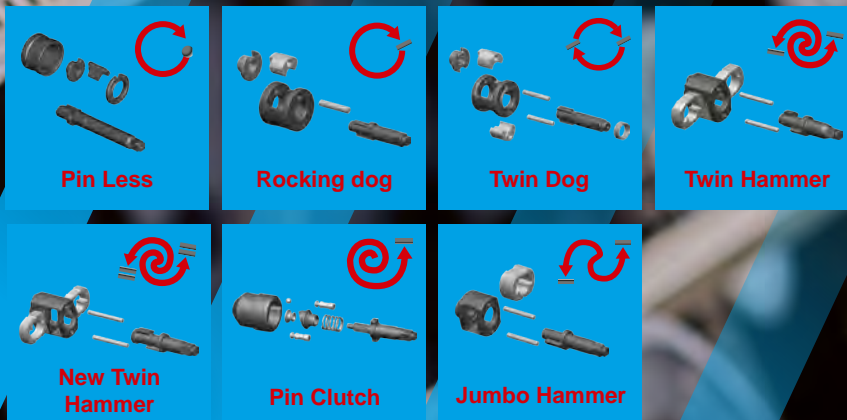

-  Quiet model
-  Light product
-  Light product (magnesium)




## 5-IN-1 SET




**★★★ NEO405KIT** 419€ B

**PNEUMATIC TOOL SET - 5 PCS**


Quick-head-change system




**81 Nm**  
**NE9004**  
1/2" AIR RATCHET  
WRENCH




**2500 R.P.M**  
**QE2132**  
STRAIGHT DRILL  
Ø 10 MM (3/8")




**14000 R.P.M**  
**QA9620**  
90° ANGLE GRINDER  
Ø 6 & 3 MM



**14000 R.P.M**  
**QB9903**  
STRAIGHT DIE GRINDER  
Ø 75 MM



**20000 R.P.M**  
**QA9120**  
STRAIGHT DIE  
GRINDER  
Ø 6 & 3 MM



4,30 kg

|        |             | Max.<br>torque | Free<br>speed | Air<br>consumption | Air<br>pressure | Length | Motor     | Net<br>weight | Air<br>inlet | Sound<br>level | Vibration<br>level |
|--------|-------------|----------------|---------------|--------------------|-----------------|--------|-----------|---------------|--------------|----------------|--------------------|
|        |             | Nm             | R.P.M         | L/min              | bar             | mm     | HP        | kg            | Inch         | dBA            | m/s <sup>2</sup>   |
|        |             |                |               |                    |                 |        | <b>hp</b> |               |              |                |                    |
| NE9004 | 1/2"        | 81             | 150           | 141                | 6.3             | 287    | -         | 1.48          | 1/4"         | 82             | 5.2                |
| QE2132 | 10mm (3/8") | -              | 2500          | 141                | 6.3             | 248    | -         | 1.1           | 1/4"         | 82             | 1.5                |
| QA9120 | 6 & 3mm     | -              | 20 000        | 141                | 6.3             | 202    | 0.5       | 0.73          | 1/4"         | 82             | 3.5                |
| QB9903 | 75mm (3")   | -              | 14 000        | 141                | 6.3             | 211    | 0.5       | 0.9           | 1/4"         | 82             | 3.5                |
| QA9620 | 6 & 3mm     | -              | 14 000        | 141                | 6.3             | 208    | 0.5       | 0.9           | 1/4"         | 82             | 3.5                |

*Consumables not available*

MINI



**1/4" 1/4" 3/8" 1/2" ★★★**

**40 Nm**  
**NEO104KIT** 186€ B

MINI PNEUMATIC RATCHET WITH  
INTERCHANGEABLE SQUARE DRIVES



**1/4" ★★★**

**40 Nm**  
**NE271** 118€ B

MINI AIR RATCHET WRENCH



**3/8" ★★★**

**40 Nm**  
**NE371** 118€ B

MINI AIR RATCHET WRENCH

|           | Square drive     | Torque range | Max.<br>torque | Free<br>speed | Air<br>pressure | Length | Net<br>weight | Air<br>inlet | Air hose | Sound<br>level |
|-----------|------------------|--------------|----------------|---------------|-----------------|--------|---------------|--------------|----------|----------------|
|           | Inch             | Nm           | Nm             | R.P.M         | bar             | mm     | kg            | Inch         | Inch     | dBA            |
|           |                  |              |                |               |                 |        |               |              |          |                |
| NEO104KIT | 1/4", 3/8", 1/2" | 5-30         | 40             | 400           | 6.3             | 159    | 0.48          | 1/4"         | 3/8"     | 81.5           |
| NE271     | 1/4"             | 5-30         | 40             | 300           | 6.3             | 134    | 0.45          | 1/4"         | 3/8"     | 81.5           |
| NE371     | 1/4"             | 5-30         | 40             | 300           | 6.3             | 134    | 0.45          | 1/4"         | 3/8"     | 81.5           |

NEW









AVAILABLE IN MARCH



★★★  
 Ø 75 mm  
**QC113**

125 € B

MINI DISC ANGLE CUT-OFF

| Disc diameter   |         | Free speed  | Air pressure  | Length  | Motor     | Net weight  | Air inlet   | Air hose  | Sound level   |
|---|---------|---|---|---|-----------|---|---|---|---|
| mm (Inch)   |         | R.P.M   | bar   | mm  | HP        | kg  | Inch  | Inch  | dBA   |
|  |         |  |  |  | <b>hp</b> |  |  |  |  |
| QC113   | 75 (3") | 18 000  | 6.3   | 129   | 0.3       | 0.53  | 1/4"  | 3/8"  | 81.5  |



★★★ 6 & 3 mm  
**QA102A**

86 € B









MINI STRAIGHT DIE GRINDER



★★★ 6 & 3 mm  
**QA602A**

125 € B

MINI 90° ANGLE GRINDER

| Collet size   |       | Free speed  | Air pressure  | Length  | Motor | Net weight  | Air inlet  | Air hose  | Sound level   |
|---|-------|---|---|---|-------|---|--|---|---|
| mm  |       | R.P.M   | bar   | mm  | HP    | kg  | Inch   | Inch  | dBA   |
|  |       |  |  |  | hp    |  |  |  |  |
| QA102A  | 6 & 3 | 1 800   | 6.3   | 115   | 0.3   | 0.29  | 1/4"   | 3/8"  | 82  |
| QA602A  | 6 & 3 | 1 800   | 6.3   | 126   | 0.3   | 0.43  | 1/4"   | 3/8"  | 81.5  |



★★★ 4500 RPM  
**QE102**

153 € B

MINI ANGLE DRILL

With keyed chuck.











★★★ 5500 RPM  
**QE902**

103 € B

MINI STRAIGHT DRILL

With keyed chuck.

| Chuck diameter  |     | Free speed  | Air pressure  | Length  | Motor     | Net weight  | Air inlet  | Air hose  | Sound level   |
|---|-----|---|---|---|-----------|---|--|---|---|
| mm  |     | R.P.M   | bar   | mm  | HP        | kg  | Inch   | Inch  | dBA   |
|  |     |  |  |  | <b>hp</b> |  |  |  |  |
| QE102   | 1-6 | 5 500   | 6.3   | 140   | 0.3       | 0.60  | 1/4"   | 3/8"  | 81.5  |
| QE902   | 1-6 | 5 500   | 6.3   | 158   | 0.3       | 0.48  | 1/4"   | 3/8"  | 81.5  |



**M10**  
**3/8"**

**102 Nm**  
**NC3410**

"BUTTERFLY"  
IMPACT WRENCH

120 € **B**

**M13**  
**3/8"**

**474 Nm**  
**NC3210**

248 € **B**

COMPACT  
IMPACT WRENCH

**M16**  
**1/2"**

**542 Nm**  
**NC498**

271 € **B**

COMPACT  
IMPACT WRENCH

**88mm**

**NC498MA** 295 € **B**

IMPACT WRENCH SET WITH MINI  
SOCKETS - 8 PCS

- 1 1/2" impact wrench (NC498)
- 6 mini hex sockets:  
13, 17, 19, 21, 22, 24 mm
- 1 1/4" male thread coupling

**M16**  
**1/2"**

**746 Nm**  
**NC4232QA**

244 € **B**

COMPACT  
IMPACT WRENCH

**120mm**

**M16**  
**1/2"**

**813 Nm**  
**NC4130**

222 € **B**

IMPACT WRENCH

Oil bath

**M16**  
**1/2"**

**884 Nm**  
**NC4670Q**

204 € **B**

COMPACT AND COMPOSITE  
IMPACT WRENCH

**105mm**

IDEAL TO REACH NUTS  
IN NARROW SPACES.

Reverse button can be  
used with one hand.

|          | Square drive | Bolt size | Torque range | Max. torque | Free speed | Air consumption | Air pressure | Length | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|----------|--------------|-----------|--------------|-------------|------------|-----------------|--------------|--------|------------|-----------|----------|-------------|------------------|
|          | Inch         | mm        | Nm           | Nm          | R.P.M      | L/min           | bar          | mm     | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
| NC3410   | 3/8"         | M10 (17)  | 7-68         | 102         | 10 000     | 71              | 6.3          | 159    | 0.8        | 1/4"      | 3/8"     | 92.1        | 3.6              |
| NC3210   | 3/8"         | M13 (20)  | 136-407      | 474         | 10 000     | 113             | 6.3          | 142    | 1.5        | 1/4"      | 3/8"     | 92.1        | 3.6              |
| NC498    | 1/2"         | M16 (24)  | 108-405      | 542         | 6500       | 119             | 6.3          | 88     | 1.37       | 1/4"      | 3/8"     | 85          | 2.0              |
| NC4232QA | 1/2"         | M16 (24)  | 136-542      | 746         | 10 000     | 113             | 6.3          | 120    | 1.38       | 1/4"      | 3/8"     | 83.0        | 3.7              |
| NC4130   | 1/2"         | M16 (24)  | 244-542      | 813         | 9 000      | 127             | 6.3          | 142    | 1.61       | 1/4"      | 3/8"     | 93.0        | 1.2              |
| NC4670Q  | 1/2"         | M16 (24)  | 150-500      | 884         | 9 000      | 147             | 6.3          | 105    | 1.1        | 1/4"      | 3/8"     | 85          | 3.3              |



## PNEUMATIC IMPACT WRENCHES



**M16**  
**1/2"** ★★  
Jumbo Hammer

**900 Nm**

**NC4650**

COMPACT IMPACT WRENCH

224 € B

ALSO AVAILABLE IN HARDCASE



**NC4650MA**

246 € B

IMPACT WRENCH SET WITH MINI SOCKETS - 8 PCS

- 1x1/2" impact wrench (NC4650)
- 6 mini hex sockets: 13, 17, 19, 21, 22, 24mm
- 1 1/4" male thread coupling



**NC4650KIT**

323 € B

METRIC IMPACT SOCKET SET WITH ACCESSORIES - 11 PCS

- 1 1/2" impact wrench (NC4650)
- 7 standard hex impact sockets: 13, 17, 19, 21, 22, 24, 27 mm
- 1 125mm extension bar
- 1 1/4" oiler
- 1 1/4" male thread coupling

3.91 kg



**M19**  
**1/2"** ★★  
Twin Hammer

**1088 Nm**

**NC4299Q**

COMPOSITE IMPACT WRENCH

139 € B

ALSO AVAILABLE IN HARDCASE



**NC4299QMB**

199 € B

IMPACT WRENCH AND SOCKET SET - 13PCS

- 1 1/2" impact wrench (NC4299Q)
- 1 impact socket set: 10, 11, 13, 17, 19, 22, 24, 27, 29, 30, 32 mm
- 1 1/4" male thread coupling



**M25**  
**1/2"** ★★  
Twin Hammer

**1356 Nm**

**NC4236A**

IMPACT WRENCH

337 € B



**M25**  
**1/2"** ★★  
Twin Hammer

**1627 Nm**

**NC4255QA**

COMPOSITE IMPACT WRENCH

256 € B

7 spring-loaded blades



**NC4255QKIT**

358 € B

METRIC IMPACT SOCKET SET WITH ACCESSORIES - 11 PCS

- 1 1/2" impact wrench (NC4255QA)
- 7 standard hex impact sockets: 13, 17, 19, 21, 22, 24, 27 mm
- 1 125 mm extension bar
- 1 1/4" oiler
- 1 1/4" male thread coupling

4.26 kg

|          | Square drive | Bolt size | Torque range | Max. torque | Free speed | Air consumption | Air pressure | Length | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|----------|--------------|-----------|--------------|-------------|------------|-----------------|--------------|--------|------------|-----------|----------|-------------|------------------|
|          | Inch         | mm        | Nm           | Nm          | R.P.M      | L/min           | bar          | mm     | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|          |              |           |              |             |            |                 |              |        |            |           |          |             |                  |
| NC4650   | 1/2"         | M16 (24)  | 244-542      | 900         | 9 000      | 123             | 6.3          | 104    | 1.4        | 1/4"      | 3/8"     | 95.0        | 2.4              |
| NC4299Q  | 1/2"         | M19 (30)  | 204-680      | 1088        | 8 500      | 113             | 6.3          | 194    | 2.1        | 1/4"      | 3/8"     | 85          | 3.2              |
| NC4236A  | 1/2"         | M25 (36)  | 271-949      | 1356        | 7 500      | 155             | 6.3          | 171    | 2.62       | 1/4"      | 3/8"     | 87.0        | 4.5              |
| NC4255QA | 1/2"         | M25 (36)  | 271-1085     | 1627        | 8 500      | 136             | 6.3          | 179    | 1.7        | 1/4"      | 3/8"     | 85          | 4.7              |





**M25**  
**3/4"** **★★★★**  
New Twin Hammer  
**1627 Nm**  
**NC6236**

382 € **B**

COMPACT  
IMPACT WRENCH



**M25**  
**3/4"** **★★★** **Mg**  
Twin Hammer

**1762 Nm**  
**NC6255Q**

351 € **B**

COMPOSITE  
IMPACT WRENCH  
7 spring-loaded blades



ALSO AVAILABLE IN HARDCASE



**NC6255QKIT** 551 € **B**

METRIC IMPACT SOCKET SET WITH  
ACCESSORIES - 11 PCS

- 1 3/4" impact wrench (NC6255Q)
- 7 standard hex impact sockets:  
24, 27, 30, 32, 33, 34, 36 mm
- 1 175 mm extension bar
- 1 1/4" oiler
- 1 1/4" male thread coupling

kg 7.49 kg



138mm


NEW

**M27**  
**3/4"** **★★★** **Mg**  
Jumbo Hammer

**1762 Nm**  
**NC6610Q**

301 € **B**

COMPACT  
IMPACT WRENCH

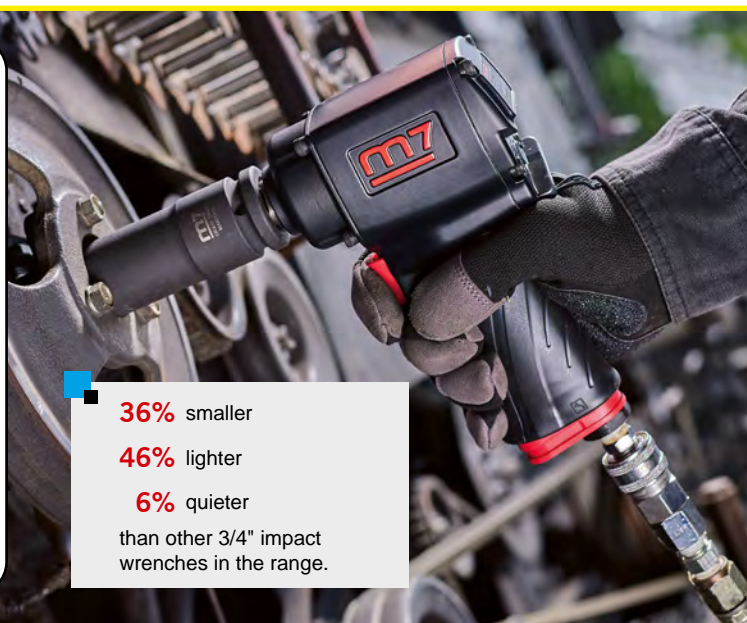

**36%** smaller  
**46%** lighter  
**6%** quieter  
than other 3/4" impact  
wrenches in the range.



**M27**  
**3/4"** **★★★★**  
Twin Hammer  
**2034 Nm**

**NC6218** 878 € **B**  
IMPACT WRENCH



**M30**  
**3/4"** **★★★** **Mg**  
Twin Hammer

**2034 Nm**  
**NC6266**

649 € **B**

COMPOSITE  
IMPACT WRENCH  
6 spring-loaded blades



## PNEUMATIC IMPACT WRENCHES

M33

1"

★ ★ 2441 Nm  
Pin Less

**NC8343\_**

IMPACT WRENCH

NC8343

Short anvil version: 381 mm

420€

B

NC83438

Long anvil version: 590 mm

420€

B



M33

1"

★ ★ ★ 3390 Nm  
Twin Hammer

NEW

**NC8332X\_**

IMPACT WRENCH

NC8332X

Short anvil version: 372.6 mm

1028€

B

NC8332X6

Long anvil version: 525 mm

1044€

B



### SPRING-LOADED BLADES



The springs reduce the passage of impurities that could block the rotation of the rotor blades.

- ▶▶▶ Optimal performance, even with low pressure.
- ▶▶▶ Reduced air consumption.
- ▶▶▶ Increased service life and performance.

TIP: DON'T FORGET TO OIL YOUR IMPACT WRENCH REGULARLY, OR USE A M7 OILER



M35

1"

★ ★ ★ Mg 3118 Nm  
Twin Hammer

**NC8266S\_**

COMPOSITE IMPACT WRENCH

NC8266S

Short anvil version: 430 mm

964€

B

NC8266S6

Long anvil version: 580 mm

1025€

B



6 spring-loaded blades



M35

1"

★ ★ ★ Mg 3118 Nm  
Twin Hammer

**3118 Nm**

**NC8266P**

942€

B

COMPOSITE IMPACT WRENCH

6 spring-loaded blades

Short anvil version: 256 mm

|          | Square drive | Bolt size | Torque range | Max. torque | Free speed | Air consumption | Air pressure | Length | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|----------|--------------|-----------|--------------|-------------|------------|-----------------|--------------|--------|------------|-----------|----------|-------------|------------------|
|          | Inch         | mm        | Nm           | Nm          | R.P.M.     | L/min           | bar          | mm     | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|          |              |           |              |             |            |                 |              |        |            |           |          |             |                  |
| NC6236   | 3/4"         | M25 (36)  | 271-1220     | 1627        | 7 500      | 155             | 6.3          | 171    | 2.68       | 1/4"      | 1/2"     | 87          | 4.5              |
| NC6610Q  | 3/4"         | M27 (41)  | 203-1220     | 1762        | 7 000      | 144             | 6.3          | 138    | 1.8        | 1/4"      | 3/8"     | 85          | 3.1              |
| NC6266   | 3/4"         | M25 (46)  | 271-1760     | 2034        | 6 000      | 169             | 6.3          | 205    | 2.95       | 3/8"      | 1/2"     | 88          | 5.9              |
| NC6255Q  | 3/4"         | M25 (36)  | 271-1491     | 1762        | 8 500      | 136             | 6.3          | 198    | 1.9        | 1/4"      | 3/8"     | 85          | 4.7              |
| NC6218   | 3/4"         | M27 (41)  | 271-1898     | 2034        | 6 000      | 182             | 6.3          | 320    | 5.7        | 1/2"      | 1/2"     | 106         | 3.3              |
| NC8343   | 1"           | M33 (50)  | 271-2170     | 2441        | 3 900      | 325             | 6.3          | 381    | 12.56      | 1/2"      | 1/2"     | 103         | 6.3              |
| NC83438  | 1"           | M33 (50)  | 271-2170     | 2441        | 3 900      | 325             | 6.3          | 590    | 13.9       | 1/2"      | 1/2"     | 103         | 6.3              |
| NC8332X  | 1"           | M33 (50)  | 271-2710     | 3390        | 4000       | 226.5           | 6.3          | 372.6  | 9.4        | 1/2"      | 3/8"     | 103         | 8.2              |
| NC8332X6 | 1"           | M33 (50)  | 271-2710     | 3390        | 4000       | 226.5           | 6.3          | 525    | 10.6       | 1/2"      | 3/8"     | 103         | 8.2              |
| NC8266S  | 1"           | M35 (55)  | 272-2448     | 3118        | 4500       | 212             | 6.3          | 430    | 6.0        | 1/2"      | 1/2"     | 92          | 6.1              |
| NC8266S6 | 1"           | M35 (55)  | 272-2448     | 3118        | 4500       | 212             | 6.3          | 580    | 7.2        | 1/2"      | 1/2"     | 92          | 6.1              |
| NC8266P  | 1"           | M35 (55)  | 271-2710     | 3118        | 4500       | 254             | 6.3          | 256    | 5.90       | 1/2"      | 1/2"     | 92          | 6.1              |





**1/4"** ★★ 30 Nm  
**NE2905** 207 € B

EXTENDED AIR RATCHET WRENCH 290 MM



**1/4"** ★★ 50 Nm  
**NE261** 118 € B

PNEUMATIC RATCHET



**3/8"** ★★ 47.6 Nm  
**NE3803** 112 € B

PNEUMATIC RATCHET



**3/8"** ★★ 50 Nm  
**NE361** 114 € B

PNEUMATIC RATCHET



**1/2"** ★★ 68 Nm  
**NE421** 109 € B

PNEUMATIC RATCHET



"No reaction" -  
anti-backlash

**1/2"** ★★ 68 Nm  
**NE4901** 190 € B

"NO REACTION" PNEUMATIC RATCHET



Lock button

**1/2"** ★★ 81 Nm  
**NE432MA** 134 € B

PNEUMATIC RATCHET



**1/2"** ★★ 109 Nm  
**NE4808** 132 € B

PNEUMATIC RATCHET



**1/2"** ★★ 95 Nm  
**NE4305** 218 € B

LIMITED  
QUANTITY!

EXTENDED AIR RATCHET WRENCH 390 MM



## PNEUMATIC RATCHETS

1/2" ★★ 135 Nm

**NE483**

152 €


B

PNEUMATIC RATCHET



Reinforced gears  
for more durability

Double-speed trigger for  
better speed control



ALSO AVAILABLE IN SET



**NE483MA**

179 €


B

PNEUMATIC RATCHET WITH SOCKETS - 8 PCS

- 1 1/2" Pneumatic ratchet (NE483)
- 6 1/2" hex sockets: 13, 17, 19, 21, 22, 24 mm
- 1/4" male thread coupling



1.86 kg

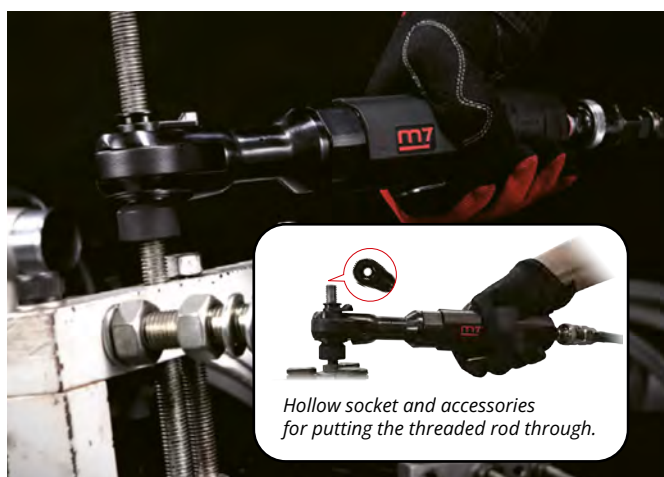

Hollow socket and accessories  
for putting the threaded rod through.

1/2" ○ ★★ 135 Nm

**NEO413**

351 €

B

PNEUMATIC RATCHET SET WITH  
ACCESSORIES - 13 PCS

- 1 1/2" pneumatic ratchet (NE461)
- 8 hex sockets: 8, 9, 10, 12, 13, 14, 17, 19 mm
- 1 75 mm extension bar
- 2 1/2" and 3/8" adaptor
- 1 1/4" male thread coupling



1/2" ★★ 204 Nm  
**NE4815A**

188 €

B

PNEUMATIC RATCHET



M14

1/2" ★★ 339 Nm  
**NE499**

390 €

B

PNEUMATIC RATCHET

|                | Square drive | Torque range | Max torque | Free speed | Air consumption | Air pressure | Length | Net weight | Air inlet | Air hose | Sound level | Vibration level |
|----------------|--------------|--------------|------------|------------|-----------------|--------------|--------|------------|-----------|----------|-------------|-----------------|
|                | Inch         | Nm           | Nm         | R.P.M      | L/min           | bar          | mm     | kg         | Inch      | Inch     | dBA         | m/s²            |
|                |              |              |            |            |                 |              |        |            |           |          |             |                 |
| NE2905         | 1/4"         | 7-20         | 30         | 300        | 85              | 6.3          | 290    | 0.84       | 1/4"      | 3/8"     | 89          | 4.4             |
| NE261          | 1/4"         | 13.5-47      | 50         | 230        | 130             | 6.3          | 160    | 0.5        | 1/4"      | 3/8"     | 88          | 3               |
| NE3803         | 3/8"         | 6.8~20.4     | 47.6       | 300        | 102             | 6.3          | 220    | 0.63       | 1/4"      | 3/8"     | 92          | 3.2             |
| NE361          | 3/8"         | 13.5-47      | 50         | 230        | 130             | 6.3          | 160    | 0.5        | 1/4"      | 3/8"     | 88          | 3               |
| NE421          | 1/2"         | 13.5-47      | 68         | 160        | 113.28          | 6.3          | 265    | 1.04       | 1/4"      | 3/8"     | 92.8        | 4.6             |
| NE4901         | 1/2"         | 13.5-54      | 68         | 1100       | 85              | 6.3          | 159    | 0.67       | 1/4"      | 3/8"     | 89          | 2.2             |
| NE432MA        | 1/2"         | 13.5-61      | 81         | 160        | 113.28          | 6.3          | 265    | 1.22       | 1/4"      | 3/8"     | 89.8        | 5.2             |
| NE4305         | 1/2"         | 20-75        | 95         | 160        | 67.0            | 6.3          | 390    | 1.63       | 1/4"      | 3/8"     | 82          | 1.2             |
| NE4808         | 1/2"         | 13.5-54      | 109        | 150        | 113             | 6.3          | 300    | 1.26       | 1/4"      | 3/8"     | 95          | 3.6             |
| NE483          | 1/2"         | 13.5-61      | 135        | 250        | 141             | 6.3          | 277    | 1.28       | 1/4"      | 3/8"     | 85          | 2.5             |
| NE461 (NE0413) | 1/2"         | 13.5-88      | 135        | 180        | 113             | 6.3          | 270    | 1.20       | 1/4"      | 3/8"     | 83          | 2.3             |
| NE4815A        | 1/2"         | 54.4-163     | 204        | 170        | 136             | 6.3          | 313    | 1.54       | 1/4"      | 3/8"     | 93          | 2.5             |
| NE499          | 1/2"         | 68-203       | 339        | 7 500      | 69.4            | 6.3          | 340    | 1.83       | 1/4"      | 3/8"     | 93          | 9.9             |





★★★  
**QA141L**  
STRAIGHT DIE GRINDER

279 € B



★★★  
**QA163L**  
STRAIGHT DIE GRINDER

302 € B HEAVY DUTY



★★★  
**QA111A**  
STRAIGHT DIE GRINDER

88 € B



★★★  
**QA311A**  
STRAIGHT DIE GRINDER

137 € B



★★★  
**QA211A**  
STRAIGHT DIE GRINDER

101 € B

ALSO AVAILABLE IN HARDCASE



★★★  
**QA313A**  
STRAIGHT DIE GRINDER

149 € B



★★★  
**QA315**  
STRAIGHT DIE GRINDER

166 € B

★★★  
**QA0215A**

140 € B

**STRAIGHT DIE GRINDER SET WITH ACCESSORIES - 15 PCS**

- 1 grinder (QA211A)
- 1 collet 3mm (1/8") and 6mm (1/4")
- 2 flat spanners for dismantling
- 5 grindstones (3mm - 1/8"): W145, W153, W163, W170, W176
- 5 grindstones (6mm - 1/4"): W220, W187, A22, A12, A5
- 1 Male thread coupling

kg 1.30 kg



★★★  
**QA611A**  
90° ANGLE GRINDER

121 € B



**QA688A**  
AIR DIE GRINDER FLEX-HEAD  
Power regulator

194 € B



|        | Collet size | Free speed | Air consumption | Air pressure | Length | Motor     | Net weight | Air inlet | Air hose | Sound level | Vibration level |
|--------|-------------|------------|-----------------|--------------|--------|-----------|------------|-----------|----------|-------------|-----------------|
|        | mm          | R.P.M      | L/min           | bar          | mm     | HP        | kg         | Inch      | Inch     | dBA         | m/s²            |
|        |             |            |                 |              |        | <b>hp</b> |            |           |          |             |                 |
| QA141L | 6           | 24 000     | 396             | 6.3          | 170    | 0.4       | 0.6        | 1/4"      | 3/8"     | 75          | 2.5             |
| QA163L | 6           | 16 000     | 141             | 6.3          | 350    | 0.9       | 1.31       | 1/4"      | 3/8"     | 75          | 2.8             |
| QA111A | 6 & 3       | 25 000     | 283             | 6.3          | 155    | 0.3       | 0.38       | 1/4"      | 3/8"     | 81.5        | 1.8             |
| QA211A | 6 & 3       | 20 000     | 283             | 6.3          | 190    | 0.9       | 0.65       | 1/4"      | 3/8"     | 75.7        | 0.8             |
| QA311A | 6 & 3       | 25 000     | 283             | 6.3          | 190    | 0.3       | 0.48       | 1/4"      | 3/8"     | 81.5        | 1.8             |
| QA313A | 6 & 3       | 25 000     | 283             | 6.3          | 235    | 0.3       | 0.58       | 1/4"      | 3/8"     | 81.5        | 1.8             |
| QA315  | 6 & 3       | 25 000     | 283             | 6.3          | 280    | 0.3       | 0.63       | 1/4"      | 3/8"     | 81.5        | 1.8             |
| QA611A | 6 & 3       | 19 000     | 283             | 6.3          | 160    | 0.3       | 0.51       | 1/4"      | 3/8"     | 74.4        | 1.7             |
| QA688A | 6 & 3       | 20 000     | 283             | 6.3          | 178    | 0.3       | 0.65       | 1/4"      | 3/8"     | 80          | 1.1             |

## PNEUMATIC MICRO DIE GRINDERS

★★ QA412

212€ B

MICRO DIE GRINDER



★★ QA421

196€ B

MICRO DIE GRINDER



★★ QA432

159€ B

MICRO DIE GRINDER



★★ QA511

118€ B

ENGRAVING PEN



|       | Collet size | Free speed | Blows frequency   | Air consumption | Air pressure | Length | Hose length | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|-------|-------------|------------|-------------------|-----------------|--------------|--------|-------------|------------|-----------|----------|-------------|------------------|
|       | mm          | R.P.M      | Blows per minutes | L/min           | bar          | mm     | mm          | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|       |             |            |                   |                 |              |        |             |            |           |          |             |                  |
| QA412 | 3           | 60 000     | -                 | 76              | 6.3          | 170    | 1 500       | 0.24       | 1/4"      | 3/8"     | 70          | 0.5              |
| QA421 | 3           | 60 000     | -                 | 76              | 6.3          | 150    | 1 500       | 0.22       | 1/4"      | 3/8"     | 70          | 0.5              |
| QA432 | 3           | 70 000     | -                 | 29              | 6.3          | 137    | 1 425       | 0.20       | 1/4"      | 3/8"     | 70          | 0.5              |
| QA511 | -           | -          | 13 000            | 29              | 6.3          | 140    | 1 420       | 0.23       | 1/4"      | 3/8"     | 78          | 0.6              |

## PNEUMATIC ANGLE GRINDERS

Consumables not available



★★ Ø125 mm

QB105

245€ B

ANGLE GRINDER WITH ROLL TYPE THROTTLE



★★ Ø125 mm

QB125

234€ B

ANGLE GRINDER COMPOSITE WITH LEVER TYPE THROTTLE



★★ Ø125 mm

QB135X

201€ B

ANGLE GRINDER WITH LEVER TYPE THROTTLE



NEW

Ø125 mm  
QB7215M

316€ B

ANGLE GRINDER WITH LEVER TYPE THROTTLE



|         | Disc diameter | Bore | Thread   | Free speed | Air consumption | Air pressure | Length | Motor | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|---------|---------------|------|----------|------------|-----------------|--------------|--------|-------|------------|-----------|----------|-------------|------------------|
|         | mm (Inch)     | mm   |          | R.P.M      | L/min           | bar          | mm     | HP    | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|         |               |      |          |            |                 |              |        |       |            |           |          |             |                  |
| QB105   | 125 (5")      | 22   | 3/8"-24  | 11 000     | 170             | 6.3          | 226    | 0.78  | 1.81       | 1/4"      | 3/8"     | 87.1        | 1.2              |
| QB125   | 125 (5")      | 22   | 5/8"-11  | 11 000     | 170             | 6.3          | 230    | 0.8   | 1.78       | 1/4"      | 3/8"     | 87          | 1.2              |
| QB135X  | 125 (5")      | 22   | M14*P2.0 | 11 000     | 170             | 6.3          | 230    | 0.78  | 1.81       | 1/4"      | 3/8"     | 87.8        | 1.2              |
| QB7215M | 125 (5")      | 22   | M14*P2.0 | 11 000     | 119             | 6.3          | 232    | 1.3   | 1.81       | 1/4"      | 3/8"     | 90          | 1.2              |

## PNEUMATIC GRINDERS



★★ Ø75mm

QC213

95,80€ B

GRINDER



★★ Ø75 mm

QC253

136€ B

GRINDER



|       | Disc diameter | Thread | Free speed | Air consumption | Air pressure | Length | Motor | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|-------|---------------|--------|------------|-----------------|--------------|--------|-------|------------|-----------|----------|-------------|------------------|
|       | mm (Inch)     | mm     | R.P.M      | L/min           | bar          | mm     | HP    | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|       |               |        |            |                 |              |        |       |            |           |          |             |                  |
| QC213 | 75 (3")       | 10     | 20 000     | 283             | 6.3          | 200    | 0.9   | 0.86       | 1/4"      | 3/8"     | 80.2        | 10.8             |
| QC253 | 75 (3")       | -      | 24 000     | 113             | 6.3          | 203    | 0.6   | 0.8        | 1/4"      | 3/8"     | 91.0        | 1.2              |





★★ Ø152 mm  
⊙5 mm

**QB45602**

248 € **B**

VACUUM RANDOM ORBITAL SANDER

★★ Ø152 mm  
⊙5 mm

**QB54602**

195 € **B**

VACUUM RANDOM ORBITAL SANDER

★★ Ø152 mm  
⊙5 mm

**QB47602**

267 € **B**

VACUUM RANDOM ORBITAL SANDER  
With central vacuum and suction hose.




LIMITED QUANTITY!

★★★  
Ø100x110 mm  
⊙2,5 mm

**QB48111**

201 € **B**

AIR JITTERBUG SANDER



Consumables not available

|         | Disc diameter | Number of holes | Orbit | Free speed | Air consumption | Air pressure | Length | Motor | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|---------|---------------|-----------------|-------|------------|-----------------|--------------|--------|-------|------------|-----------|----------|-------------|------------------|
|         | mm (Inch)     | -               | mm    | R.P.M      | L/min           | bar          | mm     | HP    | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|         |               |                 |       |            |                 |              |        |       |            |           |          |             |                  |
| QB45602 | 152 (6")      | 15              | 5     | 10 000     | 109             | 6.3          | 193    | 0.24  | 0.84       | 1/4"      | 3/8"     | 81.6        | 7.1              |
| QB54602 | 152 (6")      | 6               | 5     | 10 000     | 85              | 6.3          | 210    | 0.24  | 0.78       | 1/4"      | 3/8"     | 81.6        | 7.1              |
| QB47602 | 152 (6")      | 6               | 5     | 10 000     | 109             | 6.3          | 193    | 0.24  | 1.13       | 1/4"      | 3/8"     | 80.1        | 7.1              |
| QB48111 | 100x110       | -               | -     | 11 000     | 198             | 90           | 130    | 0.28  | 0.91       | 1/4"      | -        | 83          | 1.5              |




★★ Ø76 mm

**QP113**

175 € **B**

MINI SANDER



★★ Ø76 mm

**QP123**

183 € **B**

MINI POLISHER



★★ Ø30 mm  
⊙3 mm

**QP111**

156 € **B**

MINI ANGLE SANDER



★★ **QP123AQP04**

392 € **B**

POLYCARBONATE HEADLIGHT RENOVATION FOAM SET WITH SANDER AND POLISHER - 8 PCS

- 1 mini sander (QP113)
- 1 mini polisher (QP123)
- 2 1/4" male thread coupling
- 1 hard polishing pad (QB9403)
- 1 medium polishing pad (QB9413)
- 2 tightening spanners

2,33 kg




★★  
Ø75 mm,  
Ø113 mm,  
Ø125 mm

**QP215**

122 € **B**

3-DISC REVOLVER GRINDER



★★ Ø178 mm

**QP317**

304 € **B**

BUFFER

|       | Thread   | Disc diameter | Orbit | Free speed | Air consumption | Air pressure | Length | Motor | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|-------|----------|---------------|-------|------------|-----------------|--------------|--------|-------|------------|-----------|----------|-------------|------------------|
|       | Inch     | mm (Inch)     | mm    | R.P.M      | L/min           | bar          | mm     | HP    | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|       |          |               |       |            |                 |              |        |       |            |           |          |             |                  |
| QP113 | 5/16"-24 | 76 (3")       | 2.5   | 15 000     | 99              | 6.3          | 127    | 0.4   | 0.72       | 1/4"      | 3/8"     | 74          | 0.3              |
| QP123 | 7/16"-20 | 76 (3")       | -     | 2 100      | 99              | 6.3          | 135    | 0.4   | 0.77       | 1/4"      | 3/8"     | 74          | 0.3              |
| QP111 | M10xP1.5 | 26 (1")       | 3     | 8 000      | 152             | 6.3          | 160    | 0.3   | 0.55       | 1/4"      | 3/8"     | 89          | 0.3              |
| QP215 | 7/16"-20 | 75-113-125    | -     | 16000      | 184             | 6.3          | 160    | 0.8   | 1.20       | 1/4"      | 3/8"     | 60          | 1.8              |
| QP317 | 5/8"-11  | 178           | -     | 2500       | 169             | 6.3          | 406    | 1     | 2.04       | 1/4"      | 3/8"     | 84          | 2.0              |



## PNEUMATIC BELT SANDERS



★★ 10 mm

**QB311**

168€

B

BELT SANDER

Consumables not available



★★ 20 mm

**QB312**

312€

B

BELT SANDER



★★

**QB325N**

372€

B

BELT SANDER SET

Belt speed controller.

|        | Belt size                        | Free speed | Air consumption | Air pressure | Length | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|--------|----------------------------------|------------|-----------------|--------------|--------|------------|-----------|----------|-------------|------------------|
|        | mm                               | R.P.M      | L/min           | bar          | mm     | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|        |                                  |            |                 |              |        |            |           |          |             |                  |
| QB311  | 10x330                           | 16 000     | 226             | 6.3          | 290    | 0.8        | 1/4"      | 3/8"     | 89.7        | 0.5              |
| QB312  | 20x520                           | 16 000     | 254             | 6.3          | 360    | 1.2        | 1/4"      | 3/8"     | 91.8        | 0.4              |
| QB325N | 6x330 - 10x330 - 20x330 - 20x520 | 16 000     | 113             | 6.3          | 320    | 2.1        | 1/4"      | 3/8"     | 90.0        | 1.0              |

## PNEUMATIC SCREWDRIVERS



★★ 12 Nm

**RA101A**

STRAIGHT  
SCREWDRIVER

Twin Dog

91,80€

B



Twin Dog

Self-tapping screws for plastic / wood



★★ 16.3 Nm

**RA302**

165€

B

ADJUSTABLE  
SCREWDRIVER

Adjustable Clutch



★★ 13.5 Nm

**RA301**

152€

B

ADJUSTABLE  
SCREWDRIVER

Adjustable Clutch



Adjustable  
Clutch

Self-tapping screws for thick material / sheet metal

★★★ 19 Nm

**RA402**

326€

B

POSITIVE CLUTCH  
SCREWDRIVER

Adjustable Clutch



Positive  
Clutch



Screws for wood

The positive clutch allows an effective transfer of torque, a reduced response time and continuous operation.

|        | Hex drive   | Torque range | Free speed | Air consumption | Air pressure | Length | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|--------|-------------|--------------|------------|-----------------|--------------|--------|------------|-----------|----------|-------------|------------------|
|        | Inch (mm)   | Nm           | R.P.M      | L/min           | bar          | mm     | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|        |             |              |            |                 |              |        |            |           |          |             |                  |
| RA101A | 1/4" (6.35) | 5-12         | 9 000      | 170             | 6.3          | 166    | 0.6        | 1/4"      | 3/8"     | 85.7        | 2.2              |
| RA301  | 1/4" (6.35) | 5-13.5       | 1 800      | 170             | 6.3          | 190    | 1.1        | 1/4"      | 3/8"     | 95.3        | 4.2              |
| RA302  | 1/4" (6.35) | 5-16.3       | 800        | 170             | 6.3          | 226    | 1.3        | 1/4"      | 3/8"     | 96.5        | 2.2              |
| RA402  | 1/4" (6.35) | 6-19         | 2200       | 111             | 6.3          | 180    | 1.1        | 1/4"      | 3/8"     | 91          | 2.3              |





★★★  
**1800 RPM**  
**QE331**

108 € B

REVERSIBLE DRILL WITH  
KEYLESS CHUCK



★★★  
**2200 RPM**  
**QE332**

97 € B

DRILL WITH  
KEYLESS CHUCK



★★★  
**1600 RPM**  
**QE633**

186 € B

ANGLE DRILL WITH  
KEYLESS CHUCK

★★★  
**800 RPM**  
**QE341**

176 € B

REVERSIBLE DRILL WITH  
KEYLESS CHUCK














★★★  
**2200 RPM**  
**QE432**

180 € B

KEYLESS  
CHUCK DRILL



| Chuck diameter  |           | Free speed  | Air consumption   | Air pressure  | Length  | Motor   | Net weight  | Air inlet   | Air hose  | Sound level   | Vibration level   |
|---|-----------|---|---|---|---|---|---|---|---|---|---|
| mm  |           | R.P.M   | L/min   | bar   | mm  | HP  | kg  | Inch  | Inch  | dBA   | m/s²  |
|  |           |  |  |  |  |  |  |  |  |  |  |
| QE331   | 10 (3/8") | 1 800   | 184   | 6.3   | 203   | 0.65  | 1.1   | 1/4"  | 3/8"  | 96.5  | 0.3   |
| QE332   | 10 (3/8") | 2 200   | 184   | 6.3   | 190   | 0.60  | 1   | 1/4"  | 3/8"  | 96.5  | 0.3   |
| QE341   | 13 (1/2") | 800   | 184   | 6.3   | 230   | 0.65  | 1.8   | 1/4"  | 3/8"  | 96.5  | 0.1   |
| QE633   | 10 (3/8") | 1600  | 85  | 6.3   | 209   | 0.50  | 1.1   | 1/4"  | 3/8"  | 72  | 2.5   |
| QE432   | 10 (3/8") | 2200  | 135   | 6.3   | 226   | 0.70  | 1.18  | 1/4"  | 3/8"  | 90.0  | 3.0   |



★★ **PA201** 439 € B

**RIVETER**

Hydropneumatic system  
With nosepieces: 2.4, 3.2, 4.0, 4.8, 6.0, 6.4 mm.

★★ **PA301** 192 € B

**RIVETER**

Hydropneumatic system  
With nosepieces: 2.4, 3.2, 4.0, 4.8 mm.



★★ **PA203N** 249 € B

**RIVETER**

Hydropneumatic system  
Alloy steel jaws. Cylinder and piston with chrome finish to limit friction and allow rivets to be released quickly. 360° use. Designed for intensive use.



★★ **PB2402** 702 € B

**INSERT RIVETER**

Hydropneumatic system  
Inserts not included.



IN HARDCASE

|        | Capacity                        | Stroke length | Traction | Air consumption | Air pressure | Net weight | Air inlet | Air hose | Sound level | Vibration level |
|--------|---------------------------------|---------------|----------|-----------------|--------------|------------|-----------|----------|-------------|-----------------|
|        | mm                              | mm            | kg.-f    | L/cycle         | bar          | kg         | Inch      | Inch     | dBA         | m/s²            |
|        |                                 |               |          |                 |              |            |           |          |             |                 |
| PA201  | 2.4~6.4                         | 14            | 1603     | 2.32            | 6.3          | 1.8        | 1/4"      | 3/8"     | 79.7        | 0.5             |
| PA301  | 2.4~4.8                         | 16            | 1045     | 1.48            | 6.3          | 1.5        | 1/4"      | 3/8"     | 79.7        | 0.3             |
| PA203N | 3.2~6.4                         | 16            | 1200     | 1.48            | 6.3          | 1.5        | 1/4"      | 3/8"     | 79.7        | 0.5             |
| PB2402 | Steel M4~M10<br>Stainless M4~M8 | 9             | 1650     | 1.5             | 6.3          | 1.55       | 1/4"      | 3/8"     | 82          | 0.8             |

| RIVETER        | MATERIAL  |          | RIVET DIAMETER (ØMM) |              |     |              |     |     |  |  |
|----------------|-----------|----------|----------------------|--------------|-----|--------------|-----|-----|--|--|
| M7 PART NUMBER | RIVET     | CHUCK    | (2.5)<br>2.4         | (3.0)<br>3.2 | 4.0 | (5.0)<br>4.8 | 6.4 | 8.0 |  |  |
| PA201          | aluminum  | aluminum |                      |              |     |              |     |     |  |  |
|                | aluminum  | steel    |                      |              |     |              |     |     |  |  |
|                | steel     | steel    |                      |              |     |              |     |     |  |  |
|                | stainless | steel    |                      |              |     |              |     |     |  |  |
| PA203N         | aluminum  | aluminum |                      |              |     |              |     |     |  |  |
|                | aluminum  | steel    |                      |              |     |              |     |     |  |  |
|                | steel     | steel    |                      |              |     |              |     |     |  |  |
|                | stainless | steel    |                      |              |     |              |     |     |  |  |
| PA301          | aluminum  | aluminum |                      |              |     |              |     |     |  |  |
|                | aluminum  | steel    |                      |              |     |              |     |     |  |  |
|                | steel     | steel    |                      |              |     |              |     |     |  |  |
|                | stainless | steel    |                      |              |     |              |     |     |  |  |
|                | aluminum  | aluminum |                      |              |     |              |     |     |  |  |
|                | aluminum  | steel    |                      |              |     |              |     |     |  |  |
|                | steel     | steel    |                      |              |     |              |     |     |  |  |
|                | stainless | steel    |                      |              |     |              |     |     |  |  |





**SN1288**

151 €

B

**NEEDLE SCALER**

12 needles.  
For hard to reach areas.



**SN2110**

292 €

B

**NEEDLE SCALER**

19 needles. Pistol style.  
Designed to withstand intense use.  
Light and easy to use.



|        | Needle diameter | Number of needles | Stroke length | Blows per minute | Air consumption | Air pressure | Length | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|--------|-----------------|-------------------|---------------|------------------|-----------------|--------------|--------|------------|-----------|----------|-------------|------------------|
|        | mm              |                   | mm            | bpm              | L/min           | bar          | mm     | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|        |                 |                   |               |                  |                 |              |        |            |           |          |             |                  |
| SN2110 | 3x180           | 19                | 33            | 3 700            | 424             | 6.3          | 330    | 2.8        | 1/4"      | 3/8"     | 97          | 9.7              |
| SN1288 | 3x125           | 12                | 32            | 5 500            | 84.96           | 6.3          | 290    | 1.3        | 1/4"      | 3/8"     | 91          | 7.6              |

# PNEUMATIC SHEARS AND SAWS



**QD321**

230 €

B



**STRAIGHT SABRE SAW**

Air exhaust designed to reduce vibrations by 30%. Long stroke to optimise efficiency by 20%.




**QD221**

212 €


B

**STRAIGHT SABRE SAW**

Set of 5 files and 2 blades included



Ø 4.0 mm



**QG102**

105 €

B

**STRAIGHT SHEAR**



**QG103**


108 €

B

**NIBBLER**

Reinforced punch for increased operating life. Die adapted for round cuts. Ø 4.5mm.

|       | Cutting capacity                                | Cut length | Strokes per minute | Air consumption | Air pressure | Length | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|-------|---|------------|--------------------|-----------------|--------------|--------|------------|-----------|----------|-------------|------------------|
|       | mm  | mm         | S.P.M              | L/min           | bar          | mm     | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|       |   |            |                    |                 |              |        |            |           |          |             |                  |
| QD321 | -   | 14.5       | 11000              | 113             | 6.3          | 230    | 0.6        | 1/4"      | 3/8"     | 83          | 2.0              |
| QD221 | 1.6   | 10         | 5000               | 113             | 6.3          | 250    | 0.8        | 1/4"      | 3/8"     | 81.9        | 4.1              |
| QG102 | Stainless : 1<br>Steel : 1.2<br>Aluminium : 1.6 | -          | 2600               | 170             | 6.3          | 254    | 1          | 1/4"      | 3/8"     | 85.8        | 2.4              |
| QG103 | Steel : 1.2<br>Aluminium : 1.6                  | -          | 2 600              | 85              | 6.3          | 193    | 1          | 1/4"      | 3/8"     | 88          | 1.6              |



## PNEUMATIC HAMMERS



**SC211C**

111€ B

**ROUND CHISEL CHIPPING HAMMER**  
5 chisels included



**SC342**

187€ B

**HEX CHISEL CHIPPING HAMMER**



**SC371C**

244€ B

**ROUND CHISEL CHIPPING HAMMER**  
5 chisels included



**SC221C**

113€ B

**HEX CHISEL CHIPPING HAMMER**  
5 chisels included



ALSO AVAILABLE IN HARDCASE



**SC0617C**

**CHIPPING HAMMER SET WITH ACCESSORIES - 7 PCS**

- 1 hex chisel chipping hammer (SC221C)
- 5 chisels (SC425)
- 1 retaining spring

130€ B



|        | Type of fitting | Shank diameter | Stroke length | Blows frequency   | Air consumption | Air pressure | Length | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|--------|-----------------|----------------|---------------|-------------------|-----------------|--------------|--------|------------|-----------|----------|-------------|------------------|
|        |                 | mm             | mm            | Blows per minutes | L/min           | bar          | mm     | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|        | ● ● ●           | ⌀              | ↔             | bpm               | ⚙️              | ⚙️           | ↔      | ⚖️         | ⚙️        | ⚙️       | 🔊           | 🌀                |
| SC221C | ●               | 10             | 67            | 3200              | 113             | 6.3          | 175    | 1.7        | 1/4"      | 3/8"     | 98          | 12.3             |
| SC342  | ●               | 10             | 92            | 2200              | 113             | 6.3          | 228    | 2          | 1/4"      | 3/8"     | 94.7        | 10.6             |
| SC211C | ●               | 10.2           | 67            | 3200              | 113             | 6.3          | 175    | 1.7        | 1/4"      | 3/8"     | 98          | 12.3             |
| SC371C | ●               | 10.2           | 62.5          | 3000              | 180             | 6.3          | 180    | 1.7        | 1/4"      | 3/8"     | 95          | 8.8              |
| SN1032 | ■               | 13             | 33            | 4000              | 120             | 6.3          | 290    | 1.33       | 1/4"      | 3/8"     | 91          | 14.5             |



## PNEUMATIC GREASE GUNS



**SG405**

79,80€ B

**GREASE GUN**  
SG902 adapter included



**SG407**

144€ B

**GREASE GUN**  
Continuous flow  
SG212 flexible hose and  
SG902 adapter included



**SG400C**

84,70€ B


**COMPOSITE GREASE GUN**



! ONLY WORKS WITH 400 CC GREASE CARTRIDGES

|        | Working pressure | Max. pressure | Cartridge capacity | Net weight | Air inlet | Air hose | Sound level | Vibration level  |
|--------|------------------|---------------|--------------------|------------|-----------|----------|-------------|------------------|
|        | bar              | bar           | C.C                | kg         | Inch      | Inch     | dBA         | m/s <sup>2</sup> |
|        | ⚙️               | MAX           | 🛢️                 | ⚖️         | ⚙️        | ⚙️       | 🔊           | 🌀                |
| SG407  | 2.8 - 8.24       | 10.5          | 400                | 1.6        | 1/4"      | 3/8"     | 74          | 2                |
| SG405  | 2.8 - 8.24       | 10.5          | 400                | 1.46       | 1/4"      | 3/8"     | 80.2        | 0.7              |
| SG400C | 2.8 - 8.24       | 10.5          | 400                | 1          | 1/4"      | 3/8"     | 81.4        | 0.6              |



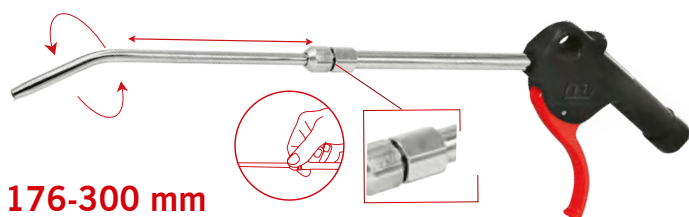


176-300 mm

**JC202**

20 €

B

EXPANDABLE BLOW GUN

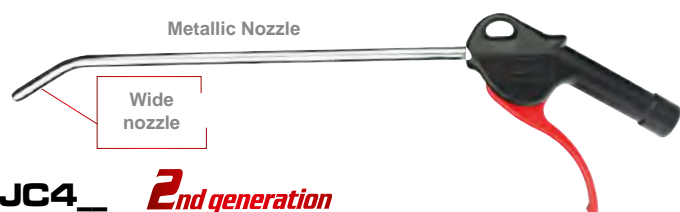
**JC4\_ 2<sup>nd</sup> generation**

WIDE NOZZLE PROGRESSIVE BLOW GUN

**JC405**

125 mm version

9 €

B

**JC410**

150 mm version

12 €

B

**JC412**

300 mm version

13 €

B

**JC424**

600 mm version

22 €

B

**JC435**

875 mm version

28 €

B



Movable venturi nozzle

**JC602**

37 €

B

HIGH-FLOW BLOW GUN

**1M JC641**

ANGLED BLOW GUN

62 €

B



Aluminium

Fixed venturi nozzle

**1M/2M JC680**

BLOW GUN

1m extension included

89 €

B



Aluminium

2m

Movable venturi nozzle

Removable extension

|       | Nozzle length | Working pressure | Max. pressure | Air consumption |       | Net weight | Air inlet | Air hose | Sound level |
|-------|---------------|------------------|---------------|-----------------|-------|------------|-----------|----------|-------------|
|       | mm            | bar              | bar           | L/min           | L/min | kg         | Inch      | Inch     | dBA         |
|       |               | Working          | MAX           |                 |       |            |           |          |             |
| JC202 | 176 - 300     | 6.2-8.5          | 11.7          | -               | 144   | 0.22       | 1/4"      | 3/8"     | 75          |
| JC602 | 50.8          | 6.2-8.3          | 15.6          | 13.0            | 15.0  | 0.60       | 1/4"      | 3/8"     | 90          |
| JC405 | 125           | 5.3-8.5          | 10.6          | 368             | 425   | 0.11       | 1/4"      | 3/8"     | 90          |
| JC410 | 250           | 5.3-8.5          | 10.6          | 368             | 425   | 0.12       | 1/4"      | 3/8"     | 90          |
| JC412 | 300           | 5.3-8.5          | 10.6          | 368             | 425   | 0.13       | 1/4"      | 3/8"     | 90          |
| JC424 | 600           | 5.3-8.5          | 10.6          | 368             | 425   | 0.14       | 1/4"      | 3/8"     | 90          |
| JC435 | 875           | 5.3-8.5          | 10.6          | 368             | 425   | 0.25       | 1/4"      | 3/8"     | 90          |
| JC641 | 1000          | 5.3-8.5          | 10.6          | 368             | 425   | 0.34       | 1/4"      | 3/8"     | 90          |
| JC680 | 2000          | 5.3-8.5          | 10.6          | 368             | 425   | 0.64       | 1/4"      | 3/8"     | 90          |

# PNEUMATIC TOOLS

## TORQUE TESTS

Our torque tests are carried out in accordance with the ISO standard, using a 3-metre hose and air pressure set at 6.3 bars.



### **Torque capacity** [Tightening test]

*Torque range* – The range (2 values) reached by the tool after 8 seconds, defined by the lowest speed (1st value) and the highest speed (2nd value) when tightening a fastener.



### **Max torque** [loosening test]

*Max torque* - The maximum torque reached by the tool, after 5 seconds, when loosening a free fastener.

## CLASSIFICATION



### **Efficiency / performance**

Simple use for completing tasks quickly. These tools combine efficiency and performance.



### **Strength**

These tools produce high torque levels, superior grinding power and strong cutting energy.




### **Endurance**

Tools built to last with a low failure rate.

## TORQUE LOSS PROBLEMS

1

Check that the selector is in the correct position




2

Check that the air pressure reaches 90 PSI (6.3 bars)



3

Put 5 drops of pneumatic oil into the air inlet then press the trigger




4

Send the tool to the service centre





**m7** **AUTO**

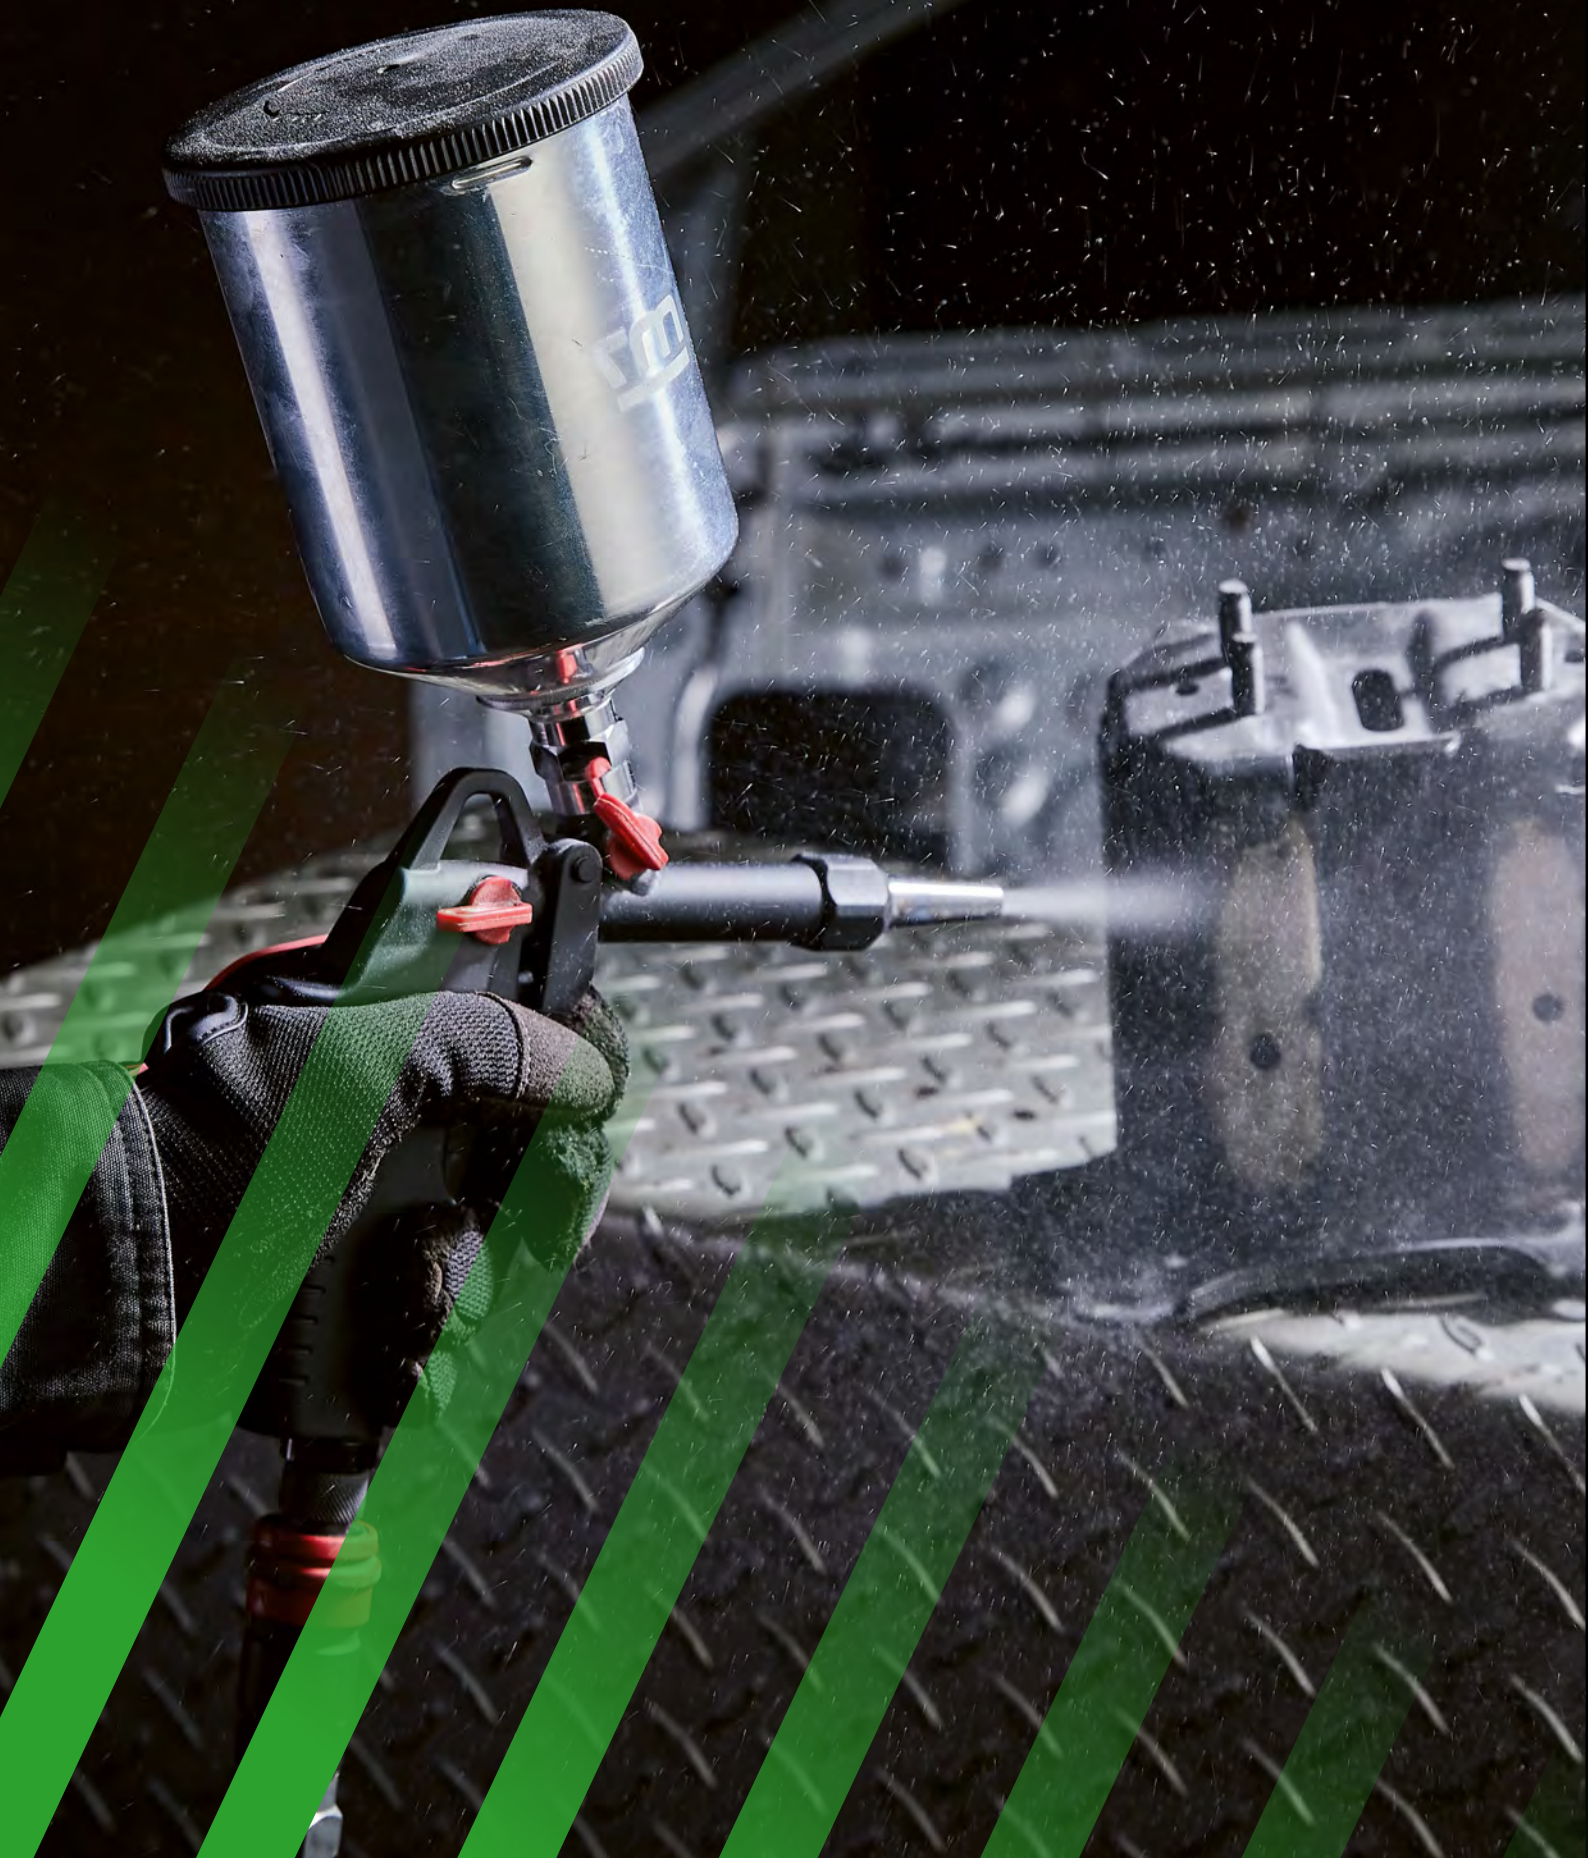



M8

1/4"



Rocking Dog

NC0208M

230 €














B

1.75 kg

### PRE-CALIBRATED IMPACT WRENCH FOR GLOW PLUGS - 9PCS

- 1 impact wrench
- 5 1/4" deep sockets: 8, 9, 10, 11, 12 mm
- 1 50mm extension bar
- 1 1/4" 37mm joint
- 1 1/4" male thread coupling



|        | Square drive  | Bolt size   | Torque range  | Max. torque   | Free speed  | Air consumption   | Air pressure   | Length  | Net weight  | Air inlet   | Air hose  | Sound level   | Vibration level   |
|--------|---|---|---|---|---|---|--|---|---|---|---|---|---|
|        | Inch  | mm  | Nm  | Nm  | R.P.M   | L/min   | bar  | mm  | kg  | Inch  | Inch  | dBA   | m/s²  |
|        |  |  |  |  |  |  |  |  |  |  |  |  |  |
| NC2710 | 1/4"  | M8 (13)   | 10-40   | 40  | 11 000  | 150   | 6.3  | 136   | 0.8   | 1/4"  | 3/8"  | 91.0  | 3.4   |



QK111

165 €








B

### PNEUMATIC OSCILLATING KNIFE

Blade can be mounted in 12 different ways depending user's needs.  
Reduced vibrations.

Curved blade included QK2030P



|       | Strokes per minute | Air consumption   | Air pressure  | Net weight  | Air inlet   | Air hose  | Sound level   | Vibration level   |
|-------|--------------------|---|---|---|---|---|---|---|
|       | S.P.M              | L/min   | bar   | kg  | Inch  | Inch  | dBA   | m/s²  |
|       | S.P.M              |  |  |  |  |  |  |  |
| QK111 | 20 000             | 170   | 6.3   | 1.1   | 1/4"  | 10  | 75  | 3.9   |



QB802

251 €

B

### PNEUMATIC SCRUBBER

Can be used to remove rust, oxide, tags, stickers, etc. without heat up damaging the paint.

Durable, easy to use and does not get hot during operation



ALSO AVAILABLE IN HARDCASE



QB0808M










393 €

B

### PNEUMATIC SCRUBBER SET WITH ACCESSORIES - 6 PCS.

- Pneumatic buffer (QB802)
- Rubber brush
- Scouring wheel
- Straight metal brush
- Hooked metal brush
- 1/4" male thread coupling



|       | Free speed  | Air consumption   | Air pressure  | Length  | Motor   | Net weight  | Air hose  | Sound level   | Vibration level   |
|-------|---|---|---|---|---|---|---|---|---|
|       | R.P.M   | L/min   | bar   | mm  | HP  | kg  | Inch  | dBA   | m/s²  |
|       |  |  |  |  |  |  |  |  |  |
| QB802 | 3600  | 300   | 6.3   | 200   | 0.7   | 1.2   | 3/8"  | 86  | 0.3   |



## SQ0104

102€

B

### BRAKE CALIPER WIND BACK KIT - 4 PCS

- Pneumatic caliper wind back tool
- Adaptor for SAAB - HONDA - ALFA ROMEO - AUDI - VW - LANCIA
- 3/8" #5 adaptor
- 1/4" Male thread coupling



ALSO AVAILABLE IN HARDCASE



## SQ0217

193€

B

### PNEUMATIC BRAKE CALIPER WIND BACK KIT - 17 PCS

- 1 pneumatic wind back tool
- 16 adaptors for disc brakes (right and left gage)



## SR2001KIT

78€

B

- 1 1.5m long Air Hose (M5\*0.45)
- 1 glazed reservoir van 22 cm³
- 1 50 c.c. Glass Jar
- 1 Airbrush
- 1 Wall bracket
- 1 2c.c. Cup
- 1 adapter M5\*0.45 male to 1/4" female
- 1 Spanner
- 1 8c.c Cup

### AIR BRUSH KIT

Dual action trigger to control the paint flow. Wall bracket included, allowing you to store the airbrush when it is at rest. Air volume adjustment button. Lightweight and ergonomic body, ideal for one-handed use. Ultra-fine 0.3mm nozzle for high precision.

|           | Nozzle diameter | Capacity | Air hose |
|-----------|-----------------|----------|----------|
|           | mm              | cm³      | Inch     |
| SR2001KIT | 0.3             | 2 - 8    | 1/4"     |

## SK1010

52€

B

### AIR CAULKING GUN

Progressive trigger, automatic decompression in the stop position. For a simple and precise application of numerous cartridge products: glue, silicon etc.



## SK1131

182€

B

### AIR CAULKING GUN

Progressive trigger, automatic decompression in the stop position. For a simple and precise application of numerous cartridge products: glue, silicon etc.



|        | Reservoir capacity | Air consumption | Air pressure | Length | Net weight | Air inlet | Air hose |
|--------|--------------------|-----------------|--------------|--------|------------|-----------|----------|
|        | ml                 | L/min           | bar          | mm     | kg         | Inch      | Inch     |
| SK1010 | 300                | 113             | 3.4 ~ 4.8    | 305    | 1.1        | 1/4"      | 3/8"     |
| SK1131 | 300 - 600          | 113             | -            | 609.6  | 1.21       | 1/4"      | 3/8"     |

## Ø25-110mm QM1125

247€

B

### PNEUMATIC BELLOWS SPREADER

For easy fitting of CVJ boots.

Do not use with a pressure exceeding 8.6 bars.



|        | Joint diameter | Air pressure | Length | Net weight | Air inlet | Air hose |
|--------|----------------|--------------|--------|------------|-----------|----------|
|        | mm             | bar          | mm     | kg         | Inch      | Inch     |
| QM1125 | 25-110         | 6.3-8.6      | 442    | 3.25       | 1/4"      | 3/8"     |

## ★★ 1L SX2101 CLEANING GUN

Rotating metal nozzle. Equipped with a valve for cleaning and drying. Ideal for removing stains from fabric or carpets, removing grease from bodywork and for cleaning engine blocks, radiators and oil stains.

143 € B



## 2L SM0502 FLUID EXTRACTOR 2L *Pneumatic version*

For brake fluid. Delivered with a 1L bottle equipped with a locking clamp to easily fill the tank with brake fluid. New safety design: when the tank is full, the air inlet mechanism automatically shuts down. Delivered with 1 main hose (1.30m) + 1 spiral brake hose (1.20m) + 1 secondary hose (1.12m).

254 € B

## 9L SM0901

### FLUID EXTRACTOR 9L

*Pneumatic or manual version*

For engine oil pans, transmission oil, coolant, power steering fluid, brake fluid, etc. Works with or without air compressor thanks to the integrated manual pump. New safety design: when the tank is full, the air inlet mechanism automatically shuts down. Delivered with 1 main hose (1.30m) + 1 spiral brake hose (1.20m) + 1 secondary hose (1.12m).

287 € B



⚠ Do not use with flammable liquids.

⚠ Do not use with flammable liquids.

|        | Reservoir capacity | Free speed | Air consumption | Air pressure | Length  | Net weight | Air inlet | Air hose | Sound level |
|--------|--------------------|------------|-----------------|--------------|---------|------------|-----------|----------|-------------|
|        | L                  | R.P.M      | L/min           | bar          | mm      | kg         | Inch      | Inch     | dBA         |
|        |                    |            |                 |              |         |            |           |          |             |
| SX2101 | 1 L                | 5 500      | 56.6            | 6.3          | 210x110 | 0.78       | 1/4"      | 3/8"     | 85          |
| SM0502 | 2 L                | -          | 166             | 4.8-11.6     | 350     | 2.5        | 1/4"      | -        | -           |
| SM0901 | 9 L                | -          | 166             | 4.8-11.6     | 640     | 4.7        | 1/4"      | -        | -           |

## WG202N

81 € B

### AIR WONDER GUN KIT - 8 PCS

Used for cleaning or vacuuming dust, wood chips, filings, broken glass, etc. Double function: vacuum and blow gun

- 1 Gun
- 1 Vacuum tip
- 1 Thin tip
- 1 Flexible nylon brush tip
- 1 Fixed extension
- 1 Flexible extension
- 1 Textile vacuum bag
- 1 Clip
- 1 Male thread



## SX4101 78 € B

### PNEUMATIC SAND BLASTER (0.6 L)

Cylindrical nozzle.

Carbon steel S45C nozzle.

- Particle Size - Mesh (#) Max.: 80
- Particle Size - Micron (µm) Max.: 177
- Particle Size - (mm) Max.: 0.177




|        | Joint diameter | Reservoir capacity | Air consumption | Air pressure | Length | Net weight | Air inlet | Air hose | Sound level | Vibration level |
|--------|----------------|--------------------|-----------------|--------------|--------|------------|-----------|----------|-------------|-----------------|
|        | mm             | L                  | L/min           | bar          | mm     | kg         | Inch      | Inch     | dBA         | m/s²            |
|        |                |                    |                 |              |        |            |           |          |             |                 |
| WG202N | -              | -                  | 3.36            | 6.3          | 145    | 0.6        | 1/4"      | 3/8"     | 92          | 7.5             |
| SX4101 | -              | 0.6                | 226.5           | 6.3          | 197    | 0.36       | 1/4"      | 3/8"     | 82.0        | -               |





# GARAGE

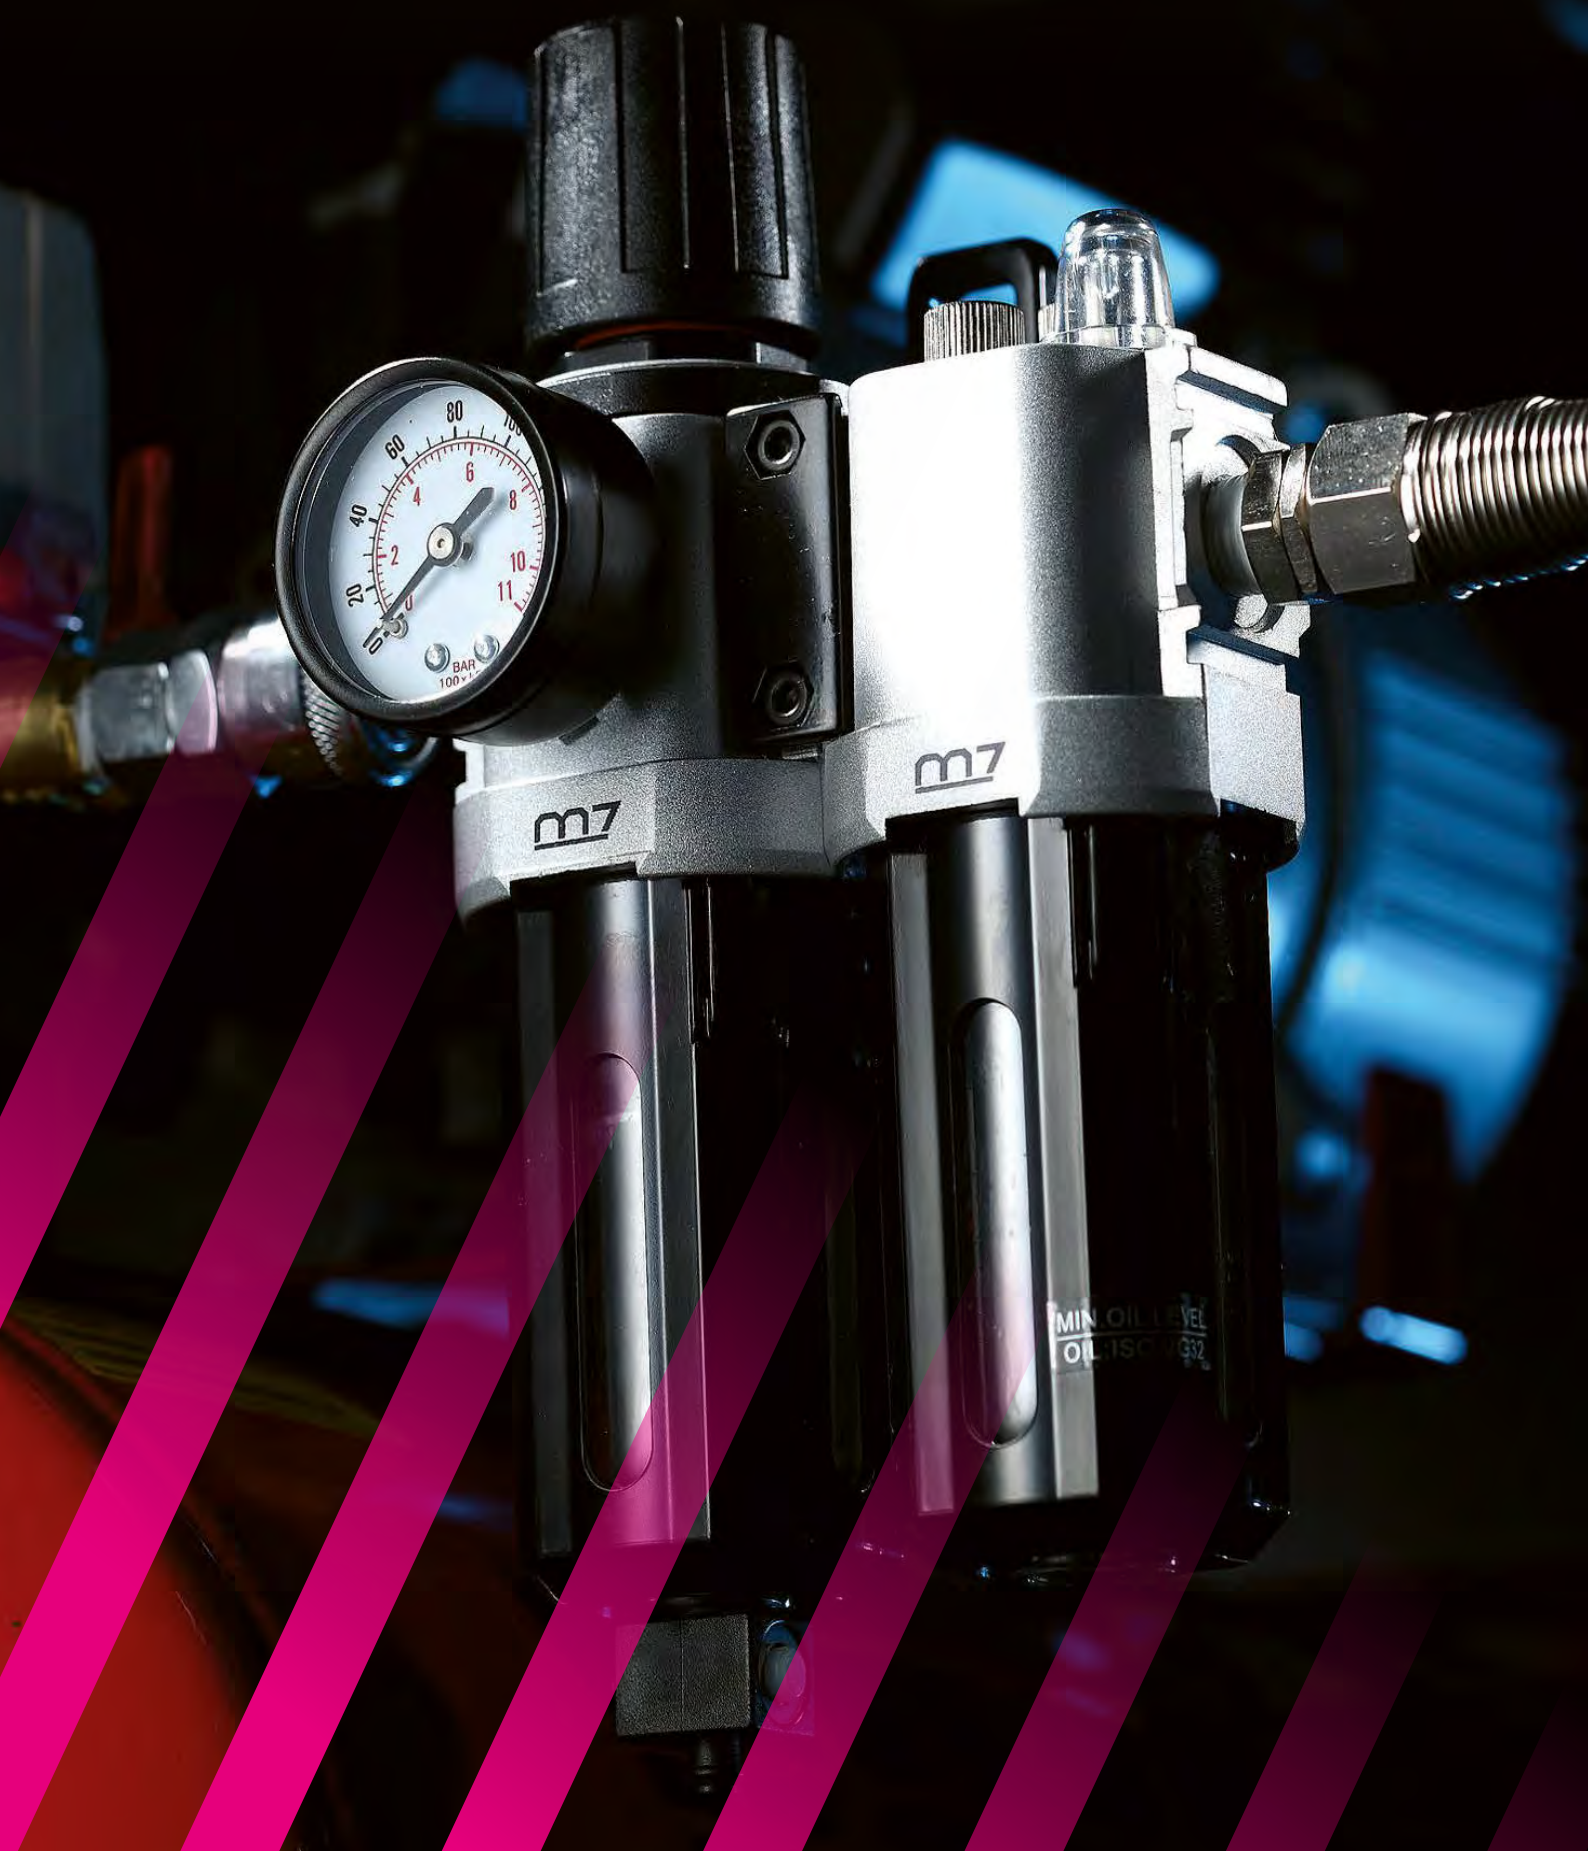

1/4" OR 3/8"

## SW1\_A

### OILER

Air inlet: 1/4". Max. oil content: 8cc. Connect directly to the hose for automatic lubrication.

SW12A  
1/4" - 100g version

7,50 € B

SW13A  
3/8" - 130g version

7,70 € B



## SGU202

### LUBRICATING OIL CAN FOR PNEUMATIC TOOLS

Low pouring point (anti-freeze). Contains extreme-pressure and anti-wear additives. Good protection against corrosion. Optimised demulsification (fast separation in case of pollution by water condensation). Viscosity level at 40°C: 22.

12,60 € B



## SG101

25,40 € B

### LUBRICATION KIT

Injection into lubrication inlet. Working temperature: -20°C to 180°C. Saves on maintenance costs. Stops corrosion of parts. Improves performance. Prolongs tool-life.



## LUBRICATOR AND REGULATOR FILTERS



NEW

1/4"

SV2260 98 € B

### LUBRICATOR AND REGULATOR FILTER

Can even be filled under pressure.



3/8"

SV2330 103 € B

### LUBRICATOR AND REGULATOR FILTER

Can even be filled under pressure.



1/2"


SV2431 194 € B

### LUBRICATOR AND REGULATOR FILTER

Can even be filled under pressure.

|        | Max input pressure | Output adjustable air pressure | Air flow | Threads (inlet/outlet) | Temperature range | Filtration | Condensate tank capacity | Oil tank capacity | Weight |
|--------|--------------------|--------------------------------|----------|------------------------|-------------------|------------|--------------------------|-------------------|--------|
|        | bar                | bar                            | l/min    | pouces                 | °C                | µm         | ml                       | ml                | kg     |
|        |                    |                                |          |                        |                   |            |                          |                   |        |
| SV2260 | 15                 | 4.8 - 9.6                      | 1750     | 1/4"                   | 5~60              | 5          | 80                       | 150               | 0.97   |
| SV2330 | 15                 | 4.8 - 9.6                      | 1100     | 3/8"                   | 5~60              | 5          | 15                       | 60                | 0.7    |
| SV2431 | 20                 | 4.8 - 9.6                      | 3400     | 1/2"                   | 5~60              | 40         | 15                       | 80                | 1.5    |

Recommended air regulation system :

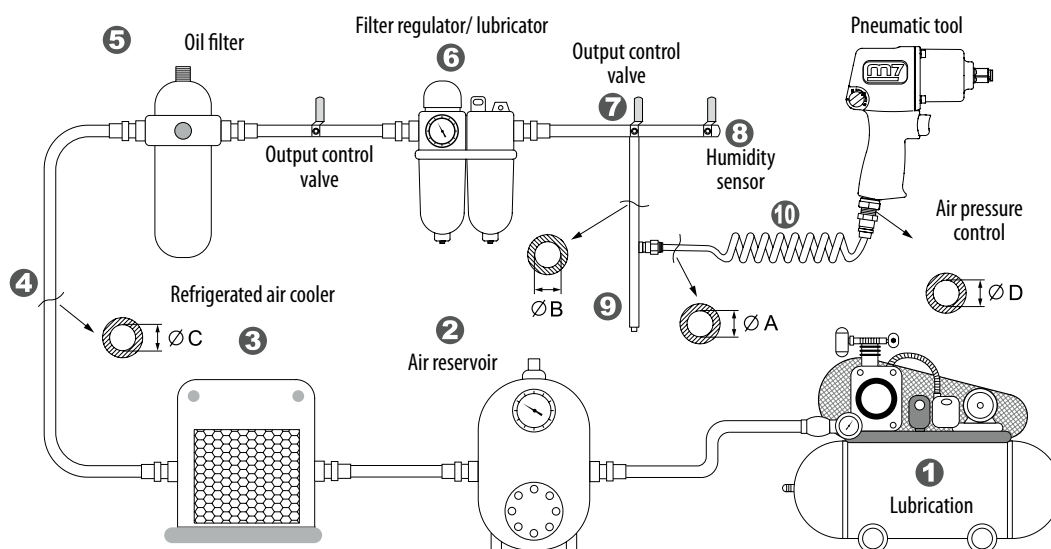






**SB201** 70€ **B**  
**DIGITAL TYRE INFLATOR**

Measures from 0 to 12 bars with an accuracy of 0.01 bars.  
Clip retainer.  
30cm version



**SB215** 71€ **B**  
**DIGITAL TYRE INFLATOR**

Measures from 0 to 12 bars with an accuracy of 0.01 bars.  
Clip retainer.  
150cm version



**SD2\_**  
**SPIRAL EXTENSION**  
Polyurethane

**10M**  
SD23210  
10M (5mm) version  
27,20€ **B**

SD23110  
10M (8mm) version  
45,30€ **B**

**15M**  
SD23115  
15M (8mm) version  
58,30€ **B**

SD23315  
15M (10mm) version  
69€ **B**

SD24415  
15M (13mm) version  
76,20€ **B**




**1/4" 25 M**  
**SD26125A** 62,40€ **B**

**1/4" PNEUMATIC HOSE**  
Ideal for work under high pressure.  
Light, flexible, durable and anti-erosion PVC Hose.  
Fittings resistant up to 17.8 bar and perfectly sealed.



**SA3\_A**  
**PNEUMATIC HOSE REEL**  
SA3215A  
15M, 1/4" version  
144€ **D**

SA3315A  
15M, 3/8" version  
144€ **D**

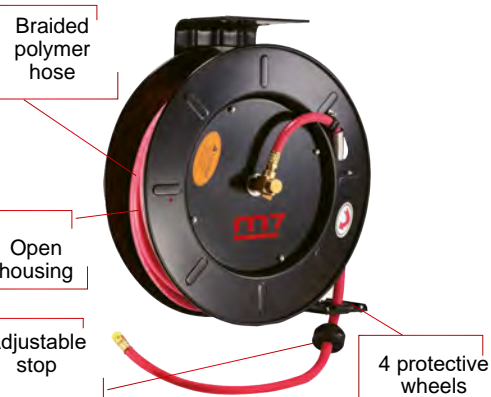

**SA4\_A**  
**PNEUMATIC HOSE REEL**  
SA4320A  
20M, 3/8" version  
329€ **D**

SA4420A  
20M, 1/2" version  
388€ **D**

|          | Max pressure | Air consumption | Air hose | Internal diameter | External diameter | Hose length | Working pressure | Max. pressure | Male thread | Net weight |
|----------|--------------|-----------------|----------|-------------------|-------------------|-------------|------------------|---------------|-------------|------------|
|          | bar          | L/min           | Inch     | mm                | mm                | M           | bar              | bar           | inch        | kg         |
|          |              |                 |          |                   |                   |             |                  |               |             |            |
| SB201    | 11           | 39              | 3/8"     | -                 | -                 | -           | 6.3              | -             | 1/4"        | 0.32       |
| SB215    | 11           | 39              | 3/8"     | -                 | -                 | -           | 6.3              | -             | 1/4"        | 0.32       |
| SA3215A  | -            | -               | -        | 8                 | 12                | 15          | 6.3              | 20            | 1/4"        | 5          |
| SA3315A  | -            | -               | -        | 10                | 15                | 15          | 6.3              | 20            | 3/8"        | 6          |
| SA4320A  | -            | -               | -        | 10                | 15                | 20+1        | 6.3              | 20            | 3/8"        | 24         |
| SA4420A  | -            | -               | -        | 13                | 18                | 20+1        | 6.3              | 20            | 1/2"        | 29         |
| SD23210  | -            | -               | -        | 5                 | 8                 | 10          | 7                | 20            | 1/4"        | 0.935      |
| SD23110  | -            | -               | -        | 8                 | 12                | 10          | 7                | 20            | 1/4"        | 0.5        |
| SD23115  | -            | -               | -        | 8                 | 12                | 15          | 7                | 20            | 1/4"        | 1.35       |
| SD23315  | -            | -               | -        | 10                | 15                | 15          | 7                | 20            | 3/8"        | 0.65       |
| SD24415  | -            | -               | -        | 13                | 18                | 15          | 7                | 20            | 1/2"        | 0.65       |
| SD26125A | 17.8         | -               | -        | 8                 | 14                | 25          | 7                | -             | 1/4"        | 4          |

## SA10\_D ELECTRIC CABLE REEL



SA1015D  
15M - 1.5mm² version  
156 € D

SA1020D  
20M - 1.5mm² version  
187 € D

SA1115D  
15M - 2.5mm² version  
205 € D

|         | Cable length | Wire cross section | Number of wires | Power | Dimensions  | Weight |
|---------|--------------|--------------------|-----------------|-------|-------------|--------|
|         | M            | mm²                |                 | V     | mm          | kg     |
|         |              |                    |                 |       |             |        |
| SA1015D | 15           | 1.5                | 3               | 230   | 350x180x325 | 5.8    |
| SA1020D | 20           | 1.5                | 3               | 230   | 350x180x325 | 5.8    |
| SA1115D | 15           | 2.5                | 3               | 230   | 350x180x325 | 6.8    |



# EXTRACTORS

## SC0320

402 € B

### AIR VIBRATION INJECTOR PULLER - 24 PCS

Designed to replace the sliding hammer without hand using.  
Save the power and time to pull out the injector from engine.  
High torque and two speeds designed to pull out the injector quickly.



Connecting Injector adaptor (M18x1.5)

Speed adjusting ring

1/4" Air input

Adapters included :

|      |       |      |      |       |      |      |      |       |       |
|------|-------|------|------|-------|------|------|------|-------|-------|
|      |       |      |      |       |      |      |      |       |       |
| M20  | M18   | M17  | M10  | M8    | M8   | M22  | M20  | M31   | M26   |
| P1.0 | P0.75 | P1.0 | P1.5 | P1.25 | P1.0 | P1.5 | P1.5 | P0.75 | P0.75 |

|      |      |      |      |      |      |       |      |      |  |
|------|------|------|------|------|------|-------|------|------|--|
|      |      |      |      |      |      |       |      |      |  |
| M18  | M16  | M14  | M14  | M29  | M27  | M27   | M25  | M25  |  |
| P1.5 | P1.5 | P1.5 | P1.5 | P1.0 | P1.0 | P0.75 | P1.0 | P0.5 |  |



## SC005

53 € B

### BALL JOINT & TIE-ROD SPLITTER SET - 5 PCS

- Steering ball joint separator - 17mm
- Steering ball joint separator - 23mm
- Pitman arm tool - 28mm
- Air hammer adaptor - 184mm
- Air hammer adaptor Ø 10,2mm

|        | Piston Stroke | Blows frequency   | Max. torque | Thread    | Air pressure | Max air pressure | Length | Net weight | Air inlet | Air hose |
|--------|---------------|-------------------|-------------|-----------|--------------|------------------|--------|------------|-----------|----------|
|        | mm            | Blows per minutes | Nm          | L/min     | bar          | bar              | mm     | kg         | Inch      | Inch     |
|        |               |                   |             |           |              |                  |        |            |           |          |
| SC0320 | 38            | 300/900           | 600         | M18 x 1.5 | 6-9          | 10               | 500    | 2.7        | 1/4"      | 12       |





|       | Lifting capacity | Cable Length | Type  | Rope diameter | Net weight |
|-------|------------------|--------------|-------|---------------|------------|
|       | kg               | m            |       | mm            | kg         |
|       |                  |              |       |               |            |
| SP105 | 3-5              | 1.5          | Cable | 3.2           | 0.81       |



**NEW**  
AVAILABLE IN MARCH

## TORQUE WRENCHES

Torque accuracy: clockwise:  $\pm 1.5\%$ , counter-clockwise:  $\pm 2.5\%$ .  
AA batteries x2 (included).

**1/4"** ★★ **1.5-30 Nm**  
**GTA201030** 359 € B  
DIGITAL ANGULAR TORQUE WRENCH

**3/8"** ★★ **6.8-135 Nm**  
**GTA306135** 369 € B  
DIGITAL ANGULAR TORQUE WRENCH


**1/2"** ★★ **17-340 Nm**  
**GTA417340** 449 € B  
DIGITAL ANGULAR TORQUE WRENCH

**3/4"** ★★ **100-1000 Nm**  
**GTA610100** 1455 € B  
DIGITAL ANGULAR TORQUE WRENCH



**1/2"** **6-60 Nm**  
**GDI406060** 489 € B  
DIGITAL TORQUE WRENCH WITH INTERCHANGEABLE RATCHET

**1/2"** **34-340 Nm**  
**GDI434340** 555 € B  
DIGITAL TORQUE WRENCH WITH INTERCHANGEABLE RATCHET

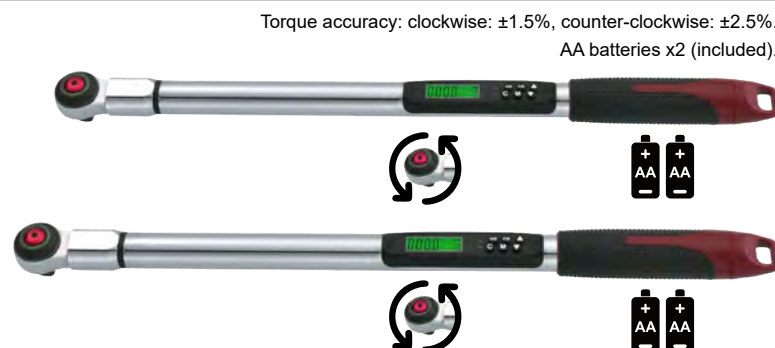

**1/2"** ★★ **6-60 Nm**  
**GBI406060** 609 € B  
BLUETOOTH DIGITAL TORQUE WRENCH WITH INTERCHANGEABLE RATCHET

**1/2"** ★★ **34-340 Nm**  
**GBI434340** 675 € B  
BLUETOOTH DIGITAL TORQUE WRENCH WITH INTERCHANGEABLE RATCHET



|           | Square drive | Gear  | Torque range | Torque indicator | Torque adjustment | Dimensions     | Net weight |
|-----------|--------------|-------|--------------|------------------|-------------------|----------------|------------|
|           | Inch         | teeth | Nm           |                  |                   | mm             | kg         |
|           |              |       |              |                  |                   |                |            |
| GTA201030 | 1/4"         | 72    | 1.5-30       | LCD              | digital           | 410 x 38 x 38  | 0.71       |
| GTA306135 | 3/8"         | 72    | 6.8-135      | LCD              | digital           | 432 x 38 x 38  | 0.84       |
| GTA417340 | 1/2"         | 72    | 17-340       | LCD              | digital           | 622 x 41 x 38  | 1.4        |
| GTA610100 | 3/4"         | 24    | 100-1000     | LCD              | digital           | 1235 x 58 x 63 | 4.6        |
| GDI406060 | 1/2"         | 72    | 6-60         | LCD              | digital           | 450 x 31 x 37  | 1.10       |
| GDI434340 | 1/2"         | 72    | 34-340       | LCD              | digital           | 659 x 31 x 37  | 1.40       |
| GBI406060 | 1/2"         | 72    | 6-60         | LCD              | digital           | 435 x 31 x 38  | 1.13       |
| GBI434340 | 1/2"         | 72    | 34-340       | LCD              | digital           | 644 x 31 x 38  | 1.43       |



## FOR IMPACT WRENCH



**1/2" MA42006M** ○

25 € B

1/2" METRIC MINI IMPACT SOCKET SET  
- 6 PCS

• 13, 17, 19, 21, 22, 24 mm

kg 0,51 kg



**1/2" MB43015M** ○

113 € B

1/2" METRIC IMPACT SOCKET SET  
- 15 PCS

• 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32 mm

kg 4,26 kg



**1/2" MB42011M** ○

60 € B

1/2" METRIC IMPACT SOCKET SET  
- 11 PCS

• 10, 11, 13, 17, 19, 22, 24, 27, 29, 30, 32 mm

kg 1,87 kg



**3/4" MB62010M** ○

138 € B

3/4" METRIC IMPACT SOCKET SET  
- 10 PCS

• 19, 22, 24, 27, 30, 32, 36, 38, 40, 42 mm

kg 4,90 kg



**1/2" MB42011M1** ○

49 € B

1/2" METRIC IMPACT SOCKET SET  
- 11 PCS

• 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21 mm

kg 1,29 kg



## FOR 4 IN 1 CORDLESS GARDENING TOOL DGM101



**DGM901**

65 € D

REMOVABLE  
TRIMMING HEAD



**DGM902**

39 € D

REMOVABLE BRUSH  
CUTTER HEAD



**DGM903**

79 € D

REMOVABLE HEDGE-  
TRIMMING HEAD

NEW  
AVAILABLE IN MARCH



**DGM904**

54 € D

REMOVABLE EDGE-TRIMMING  
HEAD

## WET/DRY BLOWER VACUUM CLEANER DDWV104KIT



**DDWV900F**

17,50 € B

HEPA FILTER



**DDWV902**

13,50 € B

BIG BRUSH  
+ 3 PLASTIC TUBES



**DDWV903**

2,50 € B

NOZZLE

NEW  
AVAILABLE IN APRIL



**DDWV904**

6 € B

SOFT TUBE

## FOR DRILLS



### QEHS2510

11,80 €

B

288 g

#### DRILL BIT SET - 10 PCS.

- 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 4.5, 5, 5.5 mm

Manufactured from high hardness HSS for easier and faster drilling.



### QEHS3

102 €

B

#### FLUTE HSS STEP DRILL SET - 3 PCS.

- 4~12, 4~20, 4~30 mm

The 3 flutes guarantee a clean and vibration-free cut. Ideal for soft materials such as plastics or light alloys. Cutting forces distributed over 3 edges, allowing a greater advance. The chamfer facilitates removal in the case of through holes.



NEW

1.2 kg

### QEHS11325

50,40 €

B

#### MECHANIC TWIST DRILL SET - 25 PCS

- 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13 mm

High-performance drill made from heavy-duty steel. Less breakage than ground drill. Suitable for on site work, use with a cordless drill driver. Application areas: steel, aluminium, plastics, brass, bronze, cast iron.



NEW

1.2 kg

### QEHS25

126,60 €

B

#### HSS-E 5% COBALT DRILL BIT SET - 25 PCS

- 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13 mm

High performance helical drill bit made of 5% cobalt steel. Cobalt provides solidity, resistance and improves drill bit's hardness. Excellent resistance to high temperatures. Best suited for drilling stainless steel and other tough materials up to 1100 N/mm². Suited for : tough and processed steel, aluminium, plastics, copper, bronze, cast-iron.

HSS-R steel

DIN 338 Short drill bit, cylindrical shank

Cutting type : straight

Cylindrical shank

Drilling depth: 5 x diameter

Spiral angle: 25° - 30°

Point angle: 118°

HSSE-Co5 steel

DIN 338 Short drill bit, cylindrical shank

Cutting type : straight

Cylindrical shank

Drilling depth: 5 x diameter

Spiral angle: 36°

C-shape : grinding meets DIN 1412 C standard requirements

Point angle: 130°

## FOR ROTARY HAMMER



NEW

780 g

### DRH7516

64 €

B

#### SDS-PLUS HAMMER DRILL BITS SET - 7 PIECES

- Ø 5, 6, 8 x 110 mm
- Ø 6, 8, 10, 12 x 160 mm

Ø 5, 6, 8 x 110 mm and Ø 6, 8, 10, 12 x 160 mm SDS-plus bits for drilling tools. Longer service life in concrete and reinforcement thanks to the stabilised head geometry and rounded cutting edges. Patented double-edge cutting design according to the bionic principle. Innovative Twinmax 3D spiral profile provides the ideal removal of drill dust.

SDS-plus steel

2 cutting edges

Cutting type : straight

Masonry

Granite and marble

## FOR STRAIGHT DIE GRINDERS



3 mm

### QB9211

5,40 €

B

#### GRINDSTONES FOR DIE GRINDER

- Grindstones on a 3 mm stem: W145, W153, W163, W170, W176



6 mm

### QB9213

8,50 €

B

#### GRINDSTONES FOR DIE GRINDER

- Grindstones on a 6 mm stem: W220, W187, A22, A12, A5



6 mm

### QB92005

132 €

B

#### TUNGSTEN CARBIDE ROTARY BURRS TC SET - 5 PIECES

Cylindrical shaft: Ø 6 mm. Burr: Ø 10 mm.



## FOR SHEARS AND SAWS



**90 mm**

**SAW BLADES - 10 PCS**  
HSS blade

**QD924** 17 € B

32 TPI  
**QD932** 17,40 € B



**225 mm**

**QD9209** 29 € B

**VARIABLE PITCH SABER SAW BLADES - 5 PCS**

Teeth per inch : 10/14 TPI . Blades design to cut steel, metal and wood. Cutting capacity for wood with nails, plywood, plastic tube, carbon: from 3.2 mm to 6.35 mm. Cutting capacity for other materials (excluding metal): from 3.2 mm to 12.7 mm.

**NEW**


AVAILABLE END OF JANUARY

**JIGSAW BLADE - 2 PCS**



10 TPI. For wood.

**DJS901P** 2,90 € B



21 TPI. For metal.

**DJS902P** 4,20 € B

## FOR ANGLE GRINDERS



**NEW**

**125 mm (5")**

**10 ZIRCON FLAP DISCS**  
Bore: 22,23 mm

Grain 40  
**DGD202610P** 48 € B

Grain 60  
**DGD202618P** 48 € B

Grain 80  
**DGD202626P** 48 € B

Inclined shape



**125 mm (5")**

**QB905** 3,70 € B

**1 GRINDING DISC**

Bore: 22 mm  
Thickness: 6 mm

167 g



**LIMITED QUANTITY!**

**180 mm (7")**

**QB907** 2,30 € B

**1 GRINDING DISC**

Bore: 22 mm  
Thickness: 6 mm

344 g



**NEW**

**125 mm (5")**

**DGD200451P**

128 € B

**25 GRINDING DISC**

Bore: 22,23 mm  
Thickness: 7 mm

Softly inclined shape



**NEW**

**125 mm (5")**

**DGD210229P**

105 € B

**25 EXTRA-THIN CUTTING DISCS**

Bore: 22,23 mm  
Thickness: 1.0 mm

Flat shape

## FOR ANGLE GRINDERS



**75 mm (3")**

**QB913**

2,20 € B

**CUT-OFF WHEEL**

Bore: 10 mm  
Thickness: 1.5 mm

10 g



**100 mm (4")**

**QB914**

3,70 € B

**CUT-OFF WHEEL**

Bore: 22 mm  
Thickness: 6 mm

36 g

## FOR CORDLESS OSCILLATING MULTI-TOOL



**QK131K3**

12,50 € **B**


1 BI-METAL BLADE



**QK131K4**

11,50 € **B**


1 SHOVEL BLADE



**QK131K5**

14,10 € **B**

1 SANDING PAD



**QB9933V06K**

8,60 € **B**


10 SANDING PAPER #60



**QK131K6**

34,40 € **B**

1 SEMICIRCLE HSS BLADE



**QB9933V10K**

8,60 € **B**

10 SANDING PAPER #100

## FOR SANDERS



**QB9327**

27,40 € **B**

SANDING DISC FOR  
Ø152 MM (6") ORBITAL  
SANDER



15 holes



**QB9403**

9,30 € **B**

POLISHER PAD  
Hard/rough 3" (75mm)  
For QP113



**QB9413**

9,30 € **B**

POLISHER PAD  
Medium 3" (75mm)  
For QP123

## FOR BELT SANDERS

10 SANDING BELTS



**QB910606**

For QB325  
6 x 330 mm 60 g

12,70 € **B**

**QB910608**

For QB325  
6 x 330 mm 80 g

12,20 € **B**

**QB910610**

For QB325  
6 x 330 mm 100 g

11,90 € **B**

**QB91106**

For QB325  
10 x 330 mm 60 g

12,70 € **B**

**QB91108**

For QB311  
10 x 330 mm 80 g

12,20 € **B**

**QB91110**

For QB311  
10 x 330 mm 100 g

12,60 € **B**

**QB91206**

For QB325  
20 x 520 mm 60 g

22,90 € **B**

**QB91208**

For QB312  
20 x 520 mm 80 g

16,20 € **B**

**QB91210**

For QB312  
20 x 520 mm 100 g

15,70 € **B**

**QB912006**

For QB325  
20 x 330 mm 60 g

20,70 € **B**

**QB912008**

For QB325  
20 x 330 mm 80 g

16,20 € **B**

**QB912010**

For QB325  
20 x 330 mm 100 g

15,30 € **B**

## FOR HEAT GUN



**DHG901**

15 € **B**

HEAT GUN NOZZLES - 3 PCS

1 reflector nozzle, 1 flat nozzle and  
1 reduction nozzle.

Material : Aluminium.



**QP215T26**

10,60 € **B**

DISCS  
For QP215



**QB9507**

34 € **B**

BUFFING PAD  
For QP317



SANDING PAD Velcro pad (3" - 75mm) For QP113 & QP123



MALE  
**QB9303**

13,10 € **B**



FEMALE  
**QB9323F**

20,30 € **B**



## FOR HAMMERS



**SC4101** ● 6,90 € B  
FLAT CHISEL  
For 10 mm round shanks



**SC4201** ● 7,40 € B  
FLAT CHISEL  
For 10.2 mm hex shanks



**SC4202** ● 7,40 € B  
SHEET METAL CUTTER  
For 10.2 mm hex shanks



**SC4203** ● 7,40 € B  
PUNCH CHISEL  
For 10.2 mm hex shanks



**SC4204** ● 7,40 € B  
SPOT WELD CHISEL  
For 10.2 mm hex shanks



**SC4205** ● 8,30 € B  
2 EDGE SHEET METAL CUTTER  
For 10.2 mm hex shanks



**SC415MA** ● 34 € B  
SET OF ROUND CHISELS  
For 10 mm round shanks



**SC425** ● 35 € B  
SET OF HEX CHISELS  
For 10.2 mm hex shanks



**SC435** ● 66,70 € B  
SET OF 5 RIVET CHISELS  
For 10 mm round shanks



**SC9501R** ● 32,90 € B  
1/2" HAMMER SOCKET ADAPTOR



**SC9502R** ● 30,70 € B  
AIR IMPACT CHISEL MADE FOR STEERING TIE-RODS



**SC9503R** ● 21,50 € B  
FLAT HEAD AIR IMPACT CHISEL



★★ ● **SC0206R**  
CHISEL SET - 6 PCS  
• 6 punch chisels 5,2 to 12,3 mm

53 € B

NEW




**SC33C** ● 53,10 € B  
NEEDLE RUST REMOVER ADAPTER FOR CHISELS  
19 needles Ø 3mm x 180mm.

NEW



**SC34C** ● 56,30 € B  
NEEDLE RUST REMOVER ADAPTER FOR CHISELS  
19 needles Ø 3mm x 180mm.

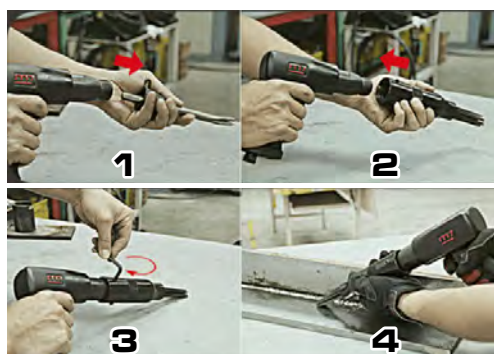

## FOR NEEDLE SCALERS



**SN288**  
19,80 € B  
SPARE NEEDLES  
For SN1288



**SN268**  
27,30 € B  
SPARE NEEDLES  
For SN2110

## FOR GREASE GUNS

### SG212

300 mm FLEXIBLE HOSE

9,30 € B



### SG902

SCREW-ON TYPE GREASE CARTRIDGE ADAPTOR FOR AIR GREASE GUN

Ø18 mm / Ø31 mm  
For SG405 / SG407

8,70 € B



## FOR PNEUMATIC BLOW GUNS



### JC491

5,80 € B

SPARE TIPS

Two side holes for air volume control

**!** Be careful, once the safety tip is set up, it cannot be withdrawn.

## FOR OSCILLATING KNIFE

57mm

### QK1057

STRAIGHT BLADE

19,50 € B



16.30 mm  
8 mm

16.30 x 8mm

### QK1008

STRAIGHT BLADE

19,50 € B



36mm

### QK2036P

CURVED U-BLADE

31,50 € B



63mm

### QK2063P

U-BLADE

34 € B



90mm

### QK2090P

U-BLADE

38,40 € B



48mm

### QK2030P

CURVED BLADE

13,80 € B



18mm

### QK3018

U-BLADE

31,10 € B



36mm

### QK3036

U-BLADE

35,60 € B



## FOR SCRUBBER

### QB9401

47,80 € B

HOOKED METAL BRUSH



### QB9411

32,90 € B


HOOKED METAL BRUSH



### QB9412

32,20 € B

STRAIGHT METAL BRUSH



### QB9414

20,20 € B

RUBBER BRUSH




### QB9415

23 € B


SCOURING WHEEL







**G:** THE LETTER G MEANS THAT THE THREAD OR TAPPING IS CYLINDRICALLY SHAPED.  
G threads are only compatible with G tapping.



**R:** THE LETTER R MEANS THAT THE THREAD OR TAPPING IS CONICAL.  
R threads are compatible with R and G tapping.

**EURO**



















**EUROPEAN PROFILE**  
HIGH OUTPUT  
USED ACROSS EUROPE

**ISO 6150-B**





















**ISO 6150-B PROFILE**  
STANDARD OUTPUT  
USED IN BENELUX, SPAIN, FRANCE,  
NORWAY AND SWITZERLAND

**BRITISH**

















**BRITISH PROFILE**  
STANDARD OUTPUT  
USED IN THE UK





































| M7 REFERENCE   | THREAD DIAMETER                   | TYPE<br>MALE<br>FEMALE  | PASSAGE | FOR<br>CONNECTORS | PRICE     |
|--|-----------------------------------|---|---------|-------------------|-----------|
| STANDARD COUPLINGS   |                                   |   |         |                   |           |
|  <b>SY1213F</b>   | <b>R 1/4"</b>                     |    | Ø 7.2mm | EURO              | 10 € B    |
| <b>SY1233F</b>   |                                   |   | Ø 6mm   | ISO 6150-B        | 10 € B    |
|  <b>SY1313F</b>  | <b>R 3/8"</b>                     |   | Ø 7.2mm | EURO              | 10 € B    |
| <b>SY1333F</b>   |                                   |   | Ø 6mm   | ISO 6150-B        | 10 € B    |
|  <b>SY1413F</b> | <b>R 1/2"</b>                     |  | Ø 7.2mm | EURO              | 11 € B    |
| <b>SY1433F</b>   |                                   |   | Ø 6mm   | ISO 6150-B        | 11 € B    |
|  <b>SY0213M</b> | <b>R 1/4"</b>                     |  | Ø 7.2mm | EURO              | 10 € B    |
| <b>SY0233M</b>   |                                   |   | Ø 6mm   | ISO 6150-B        | 10 € B    |
|  <b>SY0313M</b> | <b>R 3/8"</b>                     |  | Ø 7.2mm | EURO              | 10 € B    |
| <b>SY0333M</b>   |                                   |   | Ø 6mm   | ISO 6150-B        | 10 € B    |
|  <b>SY0413M</b> | <b>R 1/2"</b>                     |  | Ø 7.2mm | EURO              | 11 € B    |
| <b>SY0433M</b>   |                                   |   | Ø 6mm   | ISO 6150-B        | 11 € B    |
|  <b>SY3213H</b> | Int. Ø<br>for hose<br><b>8mm</b>  |  | Ø 7.2mm | EURO              | 10,40 € B |
| <b>SY3233H</b>   |                                   |   | Ø 6mm   | ISO 6150-B        | 10,30 € B |
|  <b>SY3313H</b> | Int. Ø<br>for hose<br><b>10mm</b> |  | Ø 7.2mm | EURO              | 11,70 € B |
| <b>SY3333H</b>   |                                   |   | Ø 6mm   | ISO 6150-B        | 11,70 € B |
|  <b>SY3413H</b> | Int. Ø<br>for hose<br><b>13mm</b> |  | Ø 7.2mm | EURO              | 12,40 € B |
| <b>SY3433H</b>   |                                   |   | Ø 6mm   | ISO 6150-B        | 12,40 € B |



| M7 REFERENCE  | THREAD<br>DIAMETER | TYPE<br>MALE<br>FEMALE | PASSAGE   | FOR<br>CONNECTORS | PRICE      |         |
|---|--------------------|------------------------|---|-------------------|------------|---------|
| DECOMPRESSION COUPLINGS   |                    |                        | Antistatic. Crush-Resistant. Better performance. Light and compact. High output. No "Whiplash" possible ISO 4414. Anti scratch. Flexible connection |                   |            |         |
|   | <b>SY271F</b>      | <b>G 1/4"</b>          |  F  | Ø 6mm             | ISO 6150-B | 23,50 € |
|  | <b>SY271M</b>      | <b>R 1/4"</b>          |  M   | Ø 6mm             | ISO 6150-B | 28 €    |
|  | <b>SY372M</b>      | <b>R 3/8"</b>          |  M   | Ø 8mm             | ISO 6150-B | 33,50 € |
|  | <b>SY471F</b>      | <b>G 1/2"</b>          |  F   | Ø 8mm             | ISO 6150-B | 33 €    |
| DECOMPRESSION COUPLINGS   |                    |                        |   |                   |            |         |
|  | <b>SY200FD</b>     | <b>R 1/4"</b>          |  F   | Ø 6mm             | ISO 6150-B | 11 €    |
|  | <b>SY300FD</b>     | <b>R 3/8"</b>          |  F   | Ø 6mm             | ISO 6150-B | 11 €    |
|  | <b>SY400FD</b>     | <b>R 1/2"</b>          |  F   | Ø 6mm             | ISO 6150-B | 11,80 € |
|  | <b>SY200MD</b>     | <b>R 1/4"</b>          |  M   | Ø 6mm             | ISO 6150-B | 11 €    |
|  | <b>SY300MD</b>     | <b>R 3/8"</b>          |  M   | Ø 6mm             | ISO 6150-B | 11 €    |
|  | <b>SY400MD</b>     | <b>R 1/2"</b>          |  M   | Ø 6mm             | ISO 6150-B | 11,80 € |



| M7 REFERENCE  | THREAD DIAMETER | TYPE<br>MALE<br>FEMALE                        | PASSAGE   | FOR<br>CONNECTORS | PRICE               |
|---|-----------------|---|---|-------------------|---------------------|
| STANDARD COUPLINGS  |                 |   |   |                   |                     |
|    | <b>SY230FD</b>  | <b>G 1/4"</b>                                 |  F   | Ø 6mm             | ISO 6150-B<br>7 € B |
|    | <b>SY250MD</b>  | <b>R 1/4"</b>                                 |  M   | Ø 6mm             | ISO 6150-B<br>9 € B |
| CLAW COUPLING (FIREFIGHTER TYPE)  |                 |   |   |                   |                     |
| Temperature resistance: -5°C ~ +60°C.<br>Max air pressure: 10 bars. Material: brass<br>STANDARD : NFE 29573                                 |                 |   |   |                   |                     |
|    | <b>SYRP4F</b>   | <b>G 1/2"</b>                                 |  F   | -                 | -<br>11,60 € B      |
|    | <b>SYRP4M</b>   | <b>G 1/2"</b>                                 |  M   | -                 | -<br>11 € B         |
|    | <b>SYRP4T</b>   | Ø int.<br>for hose<br><b>13mm<br/>to 15mm</b> |    | -                 | -<br>13,40 € B      |
| REDUCER   |                 |   |   |                   |                     |
|    | <b>SY32FM</b>   | <b>R 3/8"</b><br>▼<br><b>G 1/4"</b>           |  M<br>▼<br> F | -                 | -<br>5,90 € B       |
| 3/8" Tapped male / 1/4" parallel female<br>Brass and nickel-plated brass<br>Operating pressure: 0 to 15 bar                                 |                 |   |   |                   |                     |
|  <div> A : 17 mm<br/> C : 17 mm<br/> D : 5,5 mm </div> |                 |   |   |                   |                     |
| 360° ARTICULATED CONNECTORS   |                 |   |   |                   |                     |
|    | <b>SY2011M</b>  | <b>R 1/4"</b>                                 |  M   | -                 | -<br>16 € B         |

| M7 REFERENCE   | THREAD<br>DIAMETER              | TYPE<br>MALE<br>FEMALE  | PASSAGE | PROFILE   | PRICE                         |
|--|---------------------------------|---|---------|---|-------------------------------|
| CONNECTORS FOR QUICK COUPLINGS   |                                 |   |         |   |                               |
|  <b>SY251F</b>    | <b>G 1/4"</b>                   |  F   | Ø 7.4mm |    | Pack of 2<br>9,40 € <b>B</b>  |
|  <b>SY281F</b>    | <b>G 1/4"</b>                   |  F   | Ø 6mm   |    | Pack of 2<br>13,60 € <b>B</b> |
|  <b>SY261M</b>    | <b>R 1/4"</b>                   |  M   | Ø 7.4mm |    | Pack of 2<br>9 € <b>B</b>     |
|  <b>SY281M</b>    | <b>R 1/4"</b>                   |  M   | Ø 6mm   |    | Pack of 2<br>10,50 € <b>B</b> |
|  <b>SY261F</b>    | <b>G 1/4"</b>                   |  F   | Ø 6mm   |    | Pack of 2<br>9 € <b>B</b>     |
|  <b>SY251MD</b>  | <b>R 1/4"</b>                   |  M  | Ø 6mm   |   | Pack of 2<br>3,50 € <b>B</b>  |
|  <b>SY351MD</b> | <b>13mm<br/>15mm<br/>R 3/8"</b> |  M | Ø 6mm   |  | Pack of 2<br>5,40 € <b>B</b>  |
|  <b>SY351F</b>  | <b>G 3/8"</b>                   |  F | Ø 8mm   |  | Pack of 2<br>17,60 € <b>B</b> |
|  <b>SY371M</b>  | <b>R 3/8"</b>                   |  M | Ø 8mm   |  | Pack of 2<br>32,10 € <b>B</b> |
|  <b>SY381M</b>  | <b>R 3/8"</b>                   |  M | Ø 6mm   |  | Pack of 2<br>9,70 € <b>B</b>  |
|  <b>SY461M</b>  | <b>R 1/2"</b>                   |  M | Ø 7.4mm |  | Pack of 2<br>13,60 € <b>B</b> |
|  <b>SY471M</b>  | <b>R 1/2"</b>                   |  M | Ø 8mm   |  | Pack of 2<br>13 € <b>B</b>    |







[catalog.mightyseven.eu](http://catalog.mightyseven.eu)



☎ +33 5 49 30 33 27  
🌐 [kingtonyeurope.com](http://kingtonyeurope.com)  
✉ [service-clients@kingtony.eu](mailto:service-clients@kingtony.eu)

Offer valid until 31/12/2025. Non-contractual photographs.  
King Tony Europe SAS, capital : €7,350,000,  
company registration numbers: 424 737 138 - FR 26 424 737 138.  
King Tony reserves the right to modify or delete references without prior notice.

