



EN €



# 2026 CATALOGUE





# GUARANTEE

POWERTOOLS  
(EXCEPT BATTERIES)

**3**  
**YEARS**  
WARRANTY



START BOOSTERS,  
CHARGERS AND  
POWERTOOLS BATTERIES

**2**  
**YEARS**  
WARRANTY



WIRED  
& PNEUMATIC TOOLS

**2**  
**YEARS**  
WARRANTY



TORQUE WRENCHES  
(EXCLUDING CALIBRATION)

**2**  
**YEARS**  
WARRANTY




Consumables are not guaranteed.

The guarantee covers hidden defects and manufacturing faults.

An item is only covered by the guarantee if it has been used correctly and for the purpose for which it was designed.

The guarantee does not cover normal wear and tear caused by intense use or use over time.

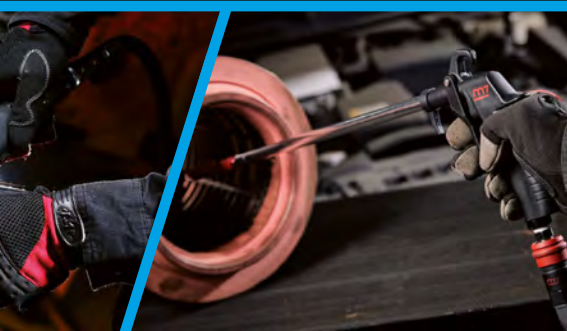

## **m7** POWER

Power Tool packs M7 18V 5Ah.....	6-7
Battery & chargers 18V 5Ah.....	8
Cordless ratchet wrenches 18V 5Ah.....	9
Cordless impact wrenches 18V 5Ah.....	10-11
Cordless impact drivers 18V 5Ah.....	12-13
Cordless impact driver 10.8V 2Ah.....	13
Cordless drill drivers 18V 5Ah.....	14
Cordless reciprocating saw 18V 5Ah.....	15
Cordless jig saw 18V 5Ah.....	16
Cordless circular saw 18V 5Ah.....	16
Cordless oscillating multi-tool 18V 5Ah.....	17
Cordless rotary hammer 18V 5Ah.....	17
Cordless angle grinder 18V 5Ah.....	18
Wired angle grinder 18V 5Ah.....	19
Cordless rivet gun 18V 5Ah.....	19
Cordless heat gun 18V 5Ah.....	20
Wired heat gun 18V 5Ah.....	20
Cordless orbital sander 18V 5Ah.....	21
Cordless grease gun 18V 5Ah.....	21
Cordless LED floodlights 18V 5Ah.....	22
Cordless pressure washer 18V 5Ah.....	23
Cordless vacuum blower 18V 5Ah.....	23
Power Tool Garden packs M7 18V 5Ah.....	24
Cordless leaf-blower 18V 5Ah.....	25
Cordless backpack sprayer 18V 5Ah.....	25
Cordless 4 in 1 gardening tool 18V 5Ah.....	26
Cordless line trimmer 18V 5Ah.....	26
Cordless hedge trimmer 18V 5Ah.....	27
Cordless pruning chainsaw 18V 5Ah.....	27

## **m7** BOOST

Mini boosters.....	29
Start boosters.....	30-31
Battery chargers.....	32-33
Battery testers.....	34

## **m7** AIR

Mini pneumatic tools.....	36-37
Pneumatic impact wrenches.....	38-41
Pneumatic ratchets.....	42-43
Pneumatic grinders.....	44
Pneumatic micro die grinders.....	45
Pneumatic angle grinders.....	45
Pneumatic grinders.....	45
Pneumatic sanders and polishers.....	46
Pneumatic belt sanders.....	47
Pneumatic screwdrivers.....	47
Pneumatic drills.....	48
Pneumatic riveters.....	49
Pneumatic needle scalers.....	50
Pneumatic shears and saws.....	50
Pneumatic hammers.....	51
Pneumatic grease guns.....	51
Pneumatic blowguns.....	52

## **m7** AUTO

## **m7** GARAGE

Maintenance.....	59
Filter regulators lubricators.....	59
Pneumatic systems.....	60
Cable reels.....	61
Extractors.....	61
Workshop organization.....	62
Torque wrenches.....	63

## **m7** ACCESSORIES



## m7 POWER



**DC201A**

105 € D 08



**M7PACKV13**

569 € D 06



**M7PACKV14**

1039 € D 06



**M7PACKV15**

1479 € D 07



**M7PACKV16**

699 € D 07



**M7PACKV17**

529 € D 07



**DRW402**

166 € D 09



**DRW402L**

175 € D 09



**DG502K**

126 € D 22



**DG502A**

395 € D 23



**AG502A**

65 € D 19



**AHG102**

50 € D 20



**DWL101**

139 € D 22



**M7PACKV18**

779 € D 24



**M7PACKV19**

749 € D 24

## m7 BOOST



**ST1000**

172 € B 29




**NC4660Q**

269 € B 38



**SN1350**

200 € B 50



**JC116LD**

43.50€ B 52



**JC122LD**

50€ B 52

## m7 GARAGE



**SV2360**

103 € B 59

## m7 ACCESSORIES



**SN1350T06**

13,20€ B 69



**JC116E01**

5,80€ B 70



**JC116H01**

10€ B 70





# POWER



**Motor**

***BRUSHLESS***

- No friction between the carbon brushes and the manifold (no more sparks at the engine outlet).
- Reduces the heat produced increasing the motor's lifespan.
- No friction to preserve the energy produced by the engine.
- Longer battery life.
- Less wear parts.





# THE PACKS **m7**

**5Ah / 18V**
**M7PACKV1**
**1/2" AND 3/4"**
**899 €**
**D**
**POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH AND 3/4" IMPACT WRENCH**

- 1 1/2" compact impact wrench (DW401)
- 1 3/4" compact impact wrench + 1 case + 2 batteries + 1 charger (DW601A)


**5Ah / 18V**
**M7PACKV10**
**1/2"**
**890 €**
**D**
**POWER TOOL PACK WITH 1/2" IMPACT WRENCH, DRILL DRIVER AND ANGLE GRINDER**

- 1 1/2" impact wrench + 1 case (DW406K)
- 1 drill driver (DD101)
- 1 angle grinder (DG501)
- 1 pack: 2 batteries + 1 charger (DC18DB50P2)


**NEW**
**5Ah / 18V**
**M7PACKV13**
**1/2"**
**569 €**
**D**
**POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH AND ANGLE GRINDER**

- 1 1/2" compact impact wrench + 1 case + 2 batteries + 1 charger (DW401A)
- 1 angle grinder + 1 case (DG502K)


**NEW**
**5Ah / 18V**
**M7PACKV14**
**1/2" AND 3/4"**
**1039 €**
**D**
**POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH, 3/4" IMPACT WRENCH AND ANGLE GRINDER**

- 1 1/2" compact impact wrench (DW401)
- 1 3/4" impact wrench + 1 case + 2 batteries + 1 charger (DW601A)
- 1 angle grinder + 1 case (DG502K)





**NEW**

**5Ah / 18V**  
**M7PACKV11**

**1/2"**

1119 € **D**

**POWER TOOL PACK WITH 1/2" IMPACT WRENCH, DRILL DRIVER, ANGLE GRINDER AND GREASE GUN**

- 1 1/2" impact wrench + 1 case (DW406K)
- 1 drill driver (DD101)
- 1 angle grinder (DG501)
- 1 cordless grease gun + 1 case (DGG102K)
- 1 pack: 2 batteries + 1 charger (DC18DB50P2)



**5Ah / 18V**  
**M7PACKV15**

**1/2"**

1479 € **D**

**POWER TOOL PACK**

- 1 hammer drill driver (DH101)
- 1 impact Driver + 1 case (DS203K)
- 1 reciprocating saw (DRS102)
- 1 circular saw (DCS101)
- 1 angle grinder (DG501)
- 1 LED floodlight (DWL102)
- 1 chargeur (DC1840A)
- 3 batteries (3x DB1850P)



**NEW**

**5Ah / 18V**  
**M7PACKV16**

**1/2"**

699 € **D**

**POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH, HAMMER DRILL DRIVER AND ANGLE GRINDER**

- 1 1/2" compact impact wrench + 1 case (DW404K)
- 1 hammer drill driver + 1 case + 2 batteries + 1 charger (DH101A)
- 1 angle grinder + 1 case (DG502K)



**NEW**

**5Ah / 18V**  
**M7PACKV17**

**1/2"**

529 € **D**

**POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH AND ANGLE GRINDER**

- 1 1/2" compact impact wrench + 1 case + 2 batteries + 1 charger (DW404A)
- 1 angle grinder + 1 case (DG502K)





# POWER

BATTERY & CHARGERS 18V 5AH

## ELECTROPORTABLE EFFICIENCY AT YOUR SERVICE

### 18 V 5 Ah

- LITHIUM-ION BATTERY CELLS
- + Charging faster than a standard battery.
  - + No memory effect
  - + Longer lifespan.
  - + No power loss.
  - + Lighter.



### QUICK CHARGING TIME 50 MINUTES

A fully discharged battery will fully charge in 50 minutes at an ambient temperature between 0 °C and 40 °C.

- BATTERY CHARGE  
LEVEL LED  
INDICATOR

**NEW**



**18 V - 5Ah**  
**DB1850P**  
BATTERY

116€ **D**



**DC1840A**  
SMART CHARGER  
Compatible with DB1850P

76€ **D**



**DC201A**  
2-PORT 18V FAST CHARGER

Two independent charging slots allow two batteries to be charged simultaneously.  
Smart Current Control.  
Twin Vortex Active Cooling.  
Five-Layer Safety Protection.

105€ **D**

### DC18DB50P2

PACK WITH 18V BATTERY  
CHARGER AND TWO  
18V 5 AH BATTERIES

279€ **D**



DC1840A

+



2x DB1850P





## CORDLESS RATCHET WRENCHES 18V 5AH

**1/2" 180 Nm**

### CORDLESS RATCHET WRENCH

#### Long battery life

up to 1000 cycles on a M16 nut with a single charge of 5.0 Ah.

High torque,  
instant power  
180 Nm in less than a  
second.

3 speeds  
150 / 200 / 300 rpm.

**NEW**



**DRW402**

166 €

D

Without charger nor battery.



**1/2" 180 Nm**

### EXTENDED CORDLESS RATCHET WRENCH


#### Long battery life

up to 1000 cycles on a M16 nut with a single charge of 5.0 Ah.

High torque,  
instant power  
180 Nm in less than a  
second.

3 speeds  
150 / 200 / 300 rpm.

**NEW**

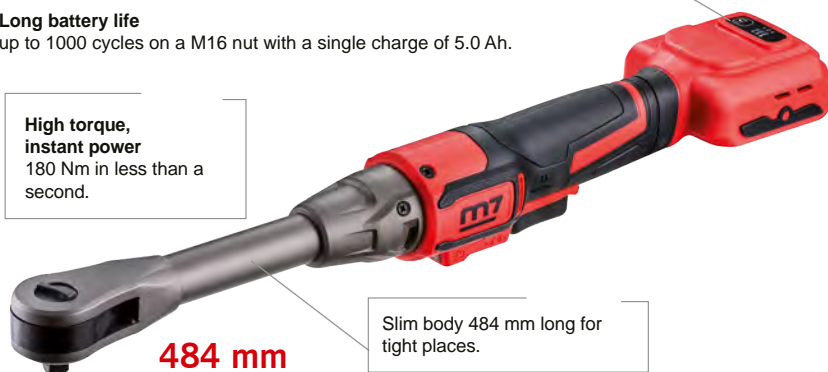

**484 mm**

Slim body 484 mm long for  
tight places.

**DRW402L**

175 €

D

Without charger nor battery.



	Battery power	Square drive	Bolt size	Torque range	Max. Torque	Free speed	Length	Loosening battery life	Weight
	Ah - V	Inch	mm	Nm	Nm	R.P.M	mm	minutes	kg
DRW402	5 Ah - 18 V	1/2"	M5-M12	100 / 140 / 180	180	0-150 / 0-200 / 0-300 (min-1)	384	50	1.3
DRW402L	5 Ah - 18 V	1/2"	M5-M12	100 / 140 / 180	180	0-150 / 0-200 / 0-300 (min-1)	484	50	1.5





**1/2"** **M6-M16**  
**813 Nm**

**CORDLESS COMPACT IMPACT WRENCH**



**3** speeds  
clockwise rotation



**3 auto-stop modes**  
to limit the tightening torque.



**Electric brake**  
Instant stop when the trigger is released.



**Motor**  
**BRUSHLESS**



**DW401** **179 €** **D**

Without charger nor battery.



DW401

**DW401A** **448 €** **D**



+ DW401 + 2x DB1850P + DC1840A

**1/2"** **M6-M16**  
**900 Nm**

**CORDLESS COMPACT IMPACT WRENCH**



**Smart stop function\***  
when loosening



**4** speeds  
clockwise rotation



**Electric brake**  
Instant stop when the trigger is released.



**Motor**  
**BRUSHLESS**



**DW404K** **138 €** **D**

Without charger nor battery.



DW404

**DW404A** **407 €** **D**



+ DW404 + 2x DB1850P + DC1840A

	Battery power	Square drive	Bolt size	Max. Torque	Free speed	Blows frequency	Tightening battery life	Loosening battery life	Weight
	Ah - V	Inch	mm	Nm	R.P.M	Blows per minutes	minutes	minutes	kg
DW401	5 Ah - 18 V	1/2"	M6-M16	813	0-1100 / 0-1600 / 0-2200	0-1500 / 0-2500 / 0-3000	83	71	1.48
DW404K	5 Ah - 18 V	1/2"	M6-M16	900	0-900 / 0-1400 / 0-1800 / 0-2200	0-1150 / 0-1700 / 0-2300 / 0-2500	100	100	1.16

\* Loose-stop function: once the bolt/nut is loosened, the speed slows down and the rotation stops after about one second, to prevent the bolt from falling.





## CORDLESS IMPACT WRENCHES 18V 5AH



**1/2"** **M10-M25**  
**1600 Nm**

### CORDLESS IMPACT WRENCH



**Smart stop function\***  
when loosening



**3 speeds**  
clockwise rotation



**Electric brake**  
Instant stop when the trigger is released.



**Motor**  
**BRUSHLESS**



**DW406K**

**279 €**

**D**

Without charger nor battery.



**DW406A**

**548 €**

**D**



**3/4"** **M10-M27**  
**1900 Nm**

### CORDLESS IMPACT WRENCH



**Reduced vibrations**  
The Motor part is connected to the handle by anti-vibration silent blocks.



**3 speeds**  
clockwise rotation



**Electric brake**  
Instant stop when the trigger is released.



**Motor**  
**BRUSHLESS**



**DW601**

**500 €**

**D**

Without charger nor battery.



DW601

**DW601A**

**769 €**

**D**



	Battery power	Square drive	Bolt size	Max. Torque	Free speed	Blows frequency	Tightening battery life	Loosening battery life	Weight
	Ah - V	Inch	mm	Nm	R.P.M	Blows per minutes	minutes	minutes	kg
DW406K	5 Ah - 18 V	1/2"	M10-M25	1600	0-1400 / 0-1900 / 0-2400	0-1800 / 0-2200 / 0-2800	57	57	2.00
DW601	5 Ah - 18 V	3/4"	M10-M27	1900	0-900 / 0-1000 / 0-1800	0-1800 / 0-2000 / 0-2200	46	44	3.37

\* Loose-stop function: once the bolt/nut is loosened, the speed slows down and the rotation stops after about one second, to prevent the bolt from falling.

Recommended Retail Price in euros excl. VAT. Non-contractual photographs. Offer valid from 01/01/2026 to 31/12/2026.

1/4" M2-M12  
203 Nm

CORDLESS IMPACT DRIVER



**Circular LED strips**  
at the tip for better visibility of  
the work area.



**3 speeds**  
clockwise rotation



**3 auto-stop modes**  
to limit the tightening  
torque.



**Electric brake**  
Instant stop when the  
trigger is released.



**Motor**  
**BRUSHLESS**



**DS201** 139 € D

Without charger nor battery.



DS201

**DS201A** 408 € D



1/4" M5-M12  
270 Nm

CORDLESS IMPACT DRIVER



**4 functions:**  
1. For wood  
2. For thin iron sheet  
3. For thick iron sheet  
4. Smart stop function\*



**Smart stop function\***  
when loosening



**Motor**  
**BRUSHLESS**



**DS202K** 171 € D

Without charger nor battery.



DS202

**DS202A** 440 € D



	Battery power	Max. Torque	Chuck diameter	Bolt size	Blows frequency	Length	Free speed	Battery life	Weight
	Ah - V	Nm	Inch	mm	Blows per minutes	mm	R.P.M	minutes	kg
					bpm				
DS201	5 Ah - 18 V	203	1/4"	M2-M12	0 - 1200 0 - 2350 0 - 3300	147	0 - 1100 0 - 1900 0 - 2800	60	1.28
DS202K	5 Ah - 18 V	270	1/4"	M5-M12	0 - 1400 0 - 1800 0 - 3500 0 - 4000	110	0 - 1200 0 - 1900 0 - 2500 0 - 3200	68	1.0

\*Loose-stop function: once the screw or bolt or nut is loosened, the speed slows down and the rotation stops after about one second, to prevent it from falling.



## CORDLESS IMPACT DRIVER 18V 5AH

**1/4" 1/2"** **M5-M12**  
**270 Nm**  
**583 Nm**

**CORDLESS 1/4" IMPACT DRIVER  
/ 1/2" IMPACT WRENCH**



**Circular LED strips**  
at the tip for better visibility of  
the work area.



**4 speeds**  
clockwise rotation



**4 functions:**

1. For wood
2. For thin iron sheet
3. For thick iron sheet
4. Smart stop function\*



**Smart stop function\***  
when loosening



**Electric brake**  
Instant stop when the  
trigger is released.



**Motor**  
**BRUSHLESS**



**DS203K**

165 €

D

Without charger nor battery.



DS203

**DS203A**

434 €

D



+ DS203



+ 2x DB1850P



+ DC1840A

	Battery power	Chuck diameter	Max. torque unscrewing	Screwing torque	Square drive	Max. loosening torque	Tightening torque	Bolt size	Blows frequency	Length	Free speed	Weight
	Ah - V	Inch	Nm	Nm	Inch	Nm	Nm	mm	Blows per minutes	mm	R.P.M	kg
DS203K	5 Ah - 18 V	1/4"	270	68 108 203 271	1/2"	583	190 244 380 542	M5 - M12	0-1400 0-1800 0-3500 0-4000	125	0-1200 0-1900 0-2500 0-3200	1.0

## CORDLESS IMPACT DRIVER 10.8V 2AH

**2Ah**  
**10.8V**  
**12V**



**1/4" M4-M12**  
**2Ah / 100 Nm**

**DS10202**

191 €

D

**CORDLESS IMPACT DRIVER**  
Quick charge takes 30 minutes.  
2 batteries + 1 charger included.



**2Ah DB1020**  
**10.8V/20V, 2AH BATTERY**  
Suitable for DS10202

57 €

D



**DC10A**  
**BATTERY CHARGER**  
For Battery DB1020

41 €

D

	Battery power	Chuck size	Bolt size	Max. Torque	Free speed	Blows frequency	Battery life	Weight
	Ah - V	Inch	mm	Nm	R.P.M	Blows per minutes	minutes	kg
DS10202	2Ah - 10.8V	1/4"	M4 - M12	100	0 - 2200	0 - 3000	103	1.0



**90 Nm**

**CORDLESS DRILL DRIVER**



**Impulse function** ideal for drilling on a painted surface and to replace damaged screws.

**23 + 1**  
release positions  
drilling position



**2** speeds



Metal chuck, self-tightening and self-locking.



**Motor**  
**BRUSHLESS**



Removable bit holder and belt hook.  
1 side handle.

**DD101** 179€

D

Without charger nor battery.



DD101

**DD101A** 448€

D



+ DD101 + 2x DB1850P + DC1840A

**90 Nm**

**CORDLESS HAMMER DRILL DRIVER**

3 modes: Screwdriver / Drill / Hammer drill.



**Impulse function** ideal for drilling on a painted surface and to replace damaged screws.

**24 + 1**  
release positions



**2** speeds



Metal chuck, self-tightening and self-locking.



**Motor**  
**BRUSHLESS**



Removable bit holder and belt hook.  
1 side handle.

**DH101** 184€

D

Without charger nor battery.



DH101

**DH101A** 453€

D



+ DH101 + 2x DB1850P + DC1840A

	Battery power	Drilling capacity	Chuck diameter	Blows frequency	Tightening control	Max. Torque	Free speed	Battery life	Weight
	Ah - V	mm	mm	Blows per minutes		Nm	R.P.M	minutes	kg
				bpm					
DD101	5 Ah - 18 V	Wood: 50 Metal: 13	13	-	23+1	90	0 - 500 0 - 2000	51	1.37
DH101	5 Ah - 18 V	Wood: 60 Metal: 13	13	0 - 8000 0 - 32000	25	90	0 - 500 0 - 2000	51	1.45





## CORDLESS RECIPROCATING SAW

Bevel Gear Drive System.  
Tool-less Blade Change.  
Variable-Speed Trigger Switch.  
Adjustable shoe length and inclination.  
Selector Lever: straight cutting action / orbital cutting action.  
This reciprocating saw has the option of orbit action to make the blade swing slightly as it cuts, for a maximum cutting efficiency.



**Electric brake**  
quickly stops the blade rotation  
when the trigger is released.



**Motor**  
**BRUSHLESS**

**DRS101**

239 €

D

Without charger nor battery.



DRS101

Consumables not available



## CORDLESS COMPACT RECIPROCATING SAW

Safety locking button.  
Tool-less Blade Change.



**Electric brake**  
quickly stops the blade rotation  
when the trigger is released.



**Motor**  
**BRUSHLESS**

### THE PERKS :

- 1 HAND WORK
- COMPACT : 336MM (W/O BATTERY)
- LIGHT : 1,78KG

**DRS102**

179 €

D

Without charger nor battery.



DRS102

**DRS102A**

448 €

D



Consumables not available

	Battery power	Cutting capacities	Stroke length	Strokes per minute	Length	Battery life	Weight
	Ah - V	mm	mm	S.P.M	mm	minutes	kg
DRS101	5 Ah - 18 V	Wood: 200 Metal: 16	29	3100	410	31	2.7
DRS102	5 Ah - 18 V	Wood: 160 Metal: 16	25	3100	336	40	1.78

**CORDLESS JIG SAW**

Speed variator trigger for precise speed control.  
Compatible with "T" and "U" shank Jigsaw blades (not included).  
Adjustable base beveling from 0 - 45 degrees (left/right).  
4-Position orbital action for smooth cutting in a variety of materials.  
Ideal for sawing wood, aluminum and steel.  
Storage of the blades in the base of the saw.

226 x 209 x 75 mm



**Electric brake**  
quickly stops the blade rotation  
when the trigger is released.



Cutting angle  
until 45°

**DJS101**

167 €

D

Without charger nor battery.



DJS101

**DJS101AB**

436 €

D



BA80129



+ DJS101



+ 2x DB1850P



+ DC1840A

Consumables not available

	Battery power	Cutting Capacity	Stroke length	Strokes per minute	Length	Battery life	Weight
	Ah - V	mm	mm	S.P.M	mm	minutes	kg
				<b>S.P.M</b>			
DJS101	5 Ah - 18 V	Wood : 63.5 Aluminium : 9.53 Steel : 6.35	25.4	2200	226	62	2.7

**CORDLESS CIRCULAR SAW**

Heavy duty, light and durable aluminum base.  
Ergonomic design with soft grip handles for comfort and control.



**Electric brake**  
quickly stops the blade rotation  
when the trigger is released.



185 MM



**Motor**  
**BRUSHLESS**



Cutting angle  
45° or 90°

**DCS101**

299 €

D

Without charger nor battery.



DCS101

**DCS101AB**

568 €

D



BA80129



+ DCS101



+ 2x DB1850P



+ DC1840A

Consumables not available

	Battery power	Free speed	Shank Opening	Spindle size	Cutting Capacity 45°	Cutting Capacity 90°	Bevel Capacity	Stroke length	Length	Battery life	Weight
	Ah - V	RPM	mm	mm	mm	mm	degrees	mm	mm	minutes	kg
					<b>45°</b>	<b>90°</b>					
DCS101	5 Ah - 18 V	4500	185	16	46	60.5	0 - 56	25.4	340	50	3.63



## CORDLESS OSCILLATING MULTI-TOOL & CORDLESS ROTARY HAMMER 18V 5AH

### CORDLESS OSCILLATING MULTI-TOOL

The oscillating multi-tool is offering a large versatility for the following uses :

- Ideal for the sawing and the cutting of wood, steel, plastic or plasterboard.
- Useful for scraping silicone, tile joints, paint or adhesive.
- Suitable for sanding narrow spaces such corners.

Anti-Vibration System for a more comfortable work.  
Fast blade replacement without tool.  
Oscillation angle : 1.8° right & left.



**6** speeds



Motor  
**BRUSHLESS**



SPEED VARIATOR



**DOM101**

207 €

D

Without charger nor battery.




DOM101

**DOM101A1**

402 €

D

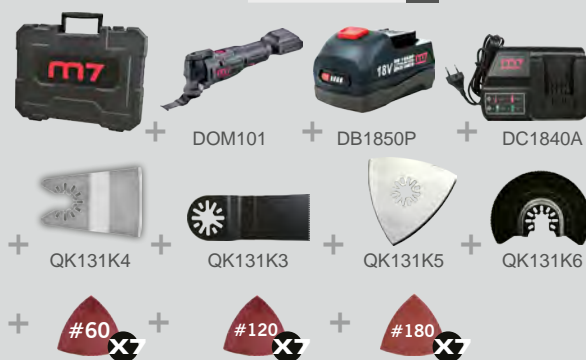

	Battery power	Strokes per minute	Oscillation angle	Length (without battery)	Sound level	Vibration level	Battery life	Weight
	Ah - V	S.P.M	degrees	mm	dBA	m/s <sup>2</sup>	minutes	kg
DOM101	5 Ah - 18 V	11000/18000	1.8	320	80.6	1.9	81	1.04

### CORDLESS ROTARY HAMMER

3 Modes : Drill, Drill + Hammer & Chisel.  
Perfect choice for drilling and chiseling concrete, wood or steel.  
SDS plus Quick-Change Chuck.  
Automatic stop of the rotation when you release the trigger.  
1 side handle.



Motor  
**BRUSHLESS**

**DRH101K**

191 €

D

Without charger nor battery.



DRH101

**DRH101A**


460 €

D



Consumables not available

	Battery power	Free speed	Blows frequency	Impact Energy	Drilling capacity	Sound level	Vibration level	Battery life	Weight
	Ah - V	R.P.M	Blows per minutes	joules	mm	dBA	m/s <sup>2</sup>	minutes	kg
DRH101K	5 Ah - 18 V	1150	5100	2.6	Wood: 30 Steel: 13 Concrete: 26	94.3	12.7	Drill: 40 Drill + Hammer: 19	2.4

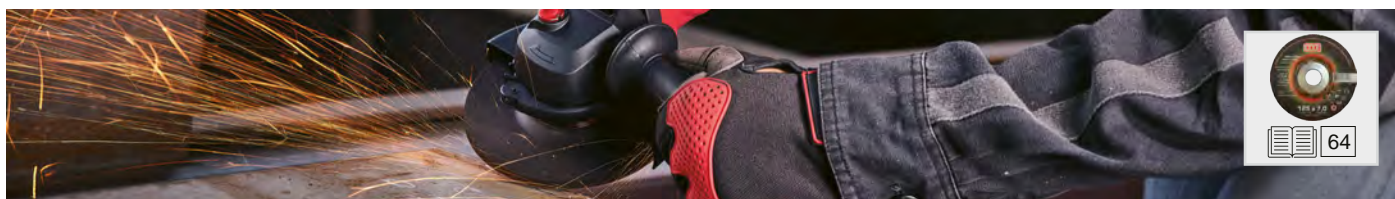

### Ø 125 mm CORDLESS ANGLE GRINDER

Spindle lock button for easy disc changes.



SPEED VARIATOR

**6** speeds

1-position on/off button ("dead man's").

The protection casing can be adjusted easily and without tools.

3 positions handle.



Dead Man Safety



Motor **BRUSHLESS**

**DG501**

189 €

D

Without charger nor battery.



DG501

**DG501A**

458 €

D



+ DG501



+ 2x DB1850P



+ DC1840A

Consumables not available

### Ø 125 mm CORDLESS ANGLE GRINDER

2-position on/off switch (continuous operation or "dead man" switch).

Spindle lock button for easy disc changes.



SPEED VARIATOR

**3** speeds

4000, 6000, 8600 rpm

Safety guard prevents sparks from flying during grinding

2 positions handle.



Dead Man Safety



Motor **BRUSHLESS**

**DG502K**

126 €

D

Without charger nor battery.



+ DG502



**DG502A**

395 €

D



+ DG502



+ 2x DB1850P



+ DC1840A

Consumables not available

**NEW**

	Battery power	Disc diameter	Thread	Power	Horsepower	Free speed	Length	Autonomie	Weight
	Ah - V	mm	mm	W	hp	R.P.M	mm	minutes	kg
				<b>W</b>	<b>hp</b>				
DG501	5 Ah - 18 V	125 (5")	M14 x P2.0	900	-	3500 - 8000	285	36	1.48
DG502	5 Ah - 18 V	125 (5")	M14 x P2.0	-	1.2	4000 / 6000 / 8500	320	25 (at 8600 rpm)	1.6



**Ø125 mm****WIRED ANGLE GRINDER**

Ideal for cutting, grinding, and deburring work on steel, cast iron, stainless steel, aluminum, etc.

Ergonomic design for a perfect grip.

2-meter power cable for full working freedom.

Spindle lock button for easy disc changes.

2-position on/off switch (continuous operation or "dead man" switch).

2 positions handle.

**Restart prevention**

If a power outage occurs and the switch remains on, the machine will not automatically restart when power is restored.

Consumables not available.

**NEW****AG502A**

Wired.



65 €

D

	Voltage	Disc diameter	Thread	Power	Free speed	Cable length	Length	Weight
	Ah - V	mm	mm	W	R.P.M	M	mm	kg
AG502	220-240V	125	M14	850	11000	2	285	2.0

**CORDLESS RIVET GUN 18V 5AH****CORDLESS RIVET GUN**

Supplied with O-ring to hold the rivet.

Nozzles included : 2.4mm, 3.2mm, 4.0mm, 4.8mm, 6.4mm.

Compatible with aluminium, steel, stainless rivets from 2.4 mm to 6.4 mm.

Battery Life : 1 full charge battery for 100 rivets.



MATERIAL		RIVET DIAMETER (ØMM)					
RIVET	MANDRIN	(2.5) 2.4	(3.0) 3.2	4.0	(5.0) 4.8	6.4	8.0
aluminum	aluminum						
aluminum	steel						
steel	steel						
stainless	steel						
stainless	stainless						

**DR102K**

563 €

D

Without charger nor battery.



DR102

**DR102A1**

758 €

D



Consumables not available

	Battery power	Capacity	Traction	Stroke length	Battery life	Weight
	Ah - V	mm	kg-f	mm	minutes	kg
DR102K	5 Ah - 18 V	2,4 - 6,4	2040	27	75	0.63

### CORDLESS HEAT GUN

60 seconds up to max. temperature.  
Stable temperature (overheat prevention).  
Quick release collar to safely and easily remove nozzle accessories.  
Lock-off feature prevents accidental start up ensuring safety to the user.  
Including 3 nozzles (reflector nozzle, flat nozzle and reduction nozzle).  
Application: Shrinking, Bending tube, Removing Stickers and more...



Includes



**DHG101**

103 €

D



Without charger nor battery.

DHG101

	Battery power	Air Flow	Max. Temperature	Length	Battery life	Weight
	Ah - V	L / min	°C	mm	minutes	kg
DHG101	5 Ah - 18 V	200	550	220	23	0.63

### WIRED HEAT GUN

### WIRED HEAT GUN



**Powerful Performance**  
2000W for fast and efficient heating.

**Precise Temperature Control**  
LCD digital display with adjustable 60 - 650°C range.

**Safe & Ergonomic**  
Comfortable grip design with overheating protection.

**Adjustable Airflow**  
Dual airflow settings (250/500 L/min) for versatile applications.

**Muti-Purpose Use**  
Comes with 4 nozzles - ideal for paint removal, shrink wrapping, thawing, molding, and more.

**NEW**



**AHG102**

50 €

D

Wired.

	Power supply voltage	Frequency	Power consumption	Temperature Range	Air Flow	Weight
	V	Hz	W	°C	L / min	kg
AHG102	230	50	2000	60 (1) / 60 - 650 (2)	250 (1) / 150-500 (2)	0.7



## CORDLESS ORBITAL SANDER & GREASE GUN 18V 5AH

**Ø125mm / 3mm**

### CORDLESS ORBITAL SANDER

Compatible abrasive disc: 8-hole velcro paper Ø 125 mm.  
Speed variator: 6 speeds.  
Dust collection bag.  
The speed trigger allows to adapt the speed to the type of surface or the work that needs to be done.  
Soft start function.  
Ergonomic handle for more confort and control.



SPEED VARIATOR



**DOS501**

139 €

D



DOS501

Without charger nor battery.

**DOS501AB**

408 €

D



BA80129



DOS501



2x DB1850P



DC1840A

Consumables not available.

	Battery power	Disc diameter	Free speed	Orbit	Length	Battery life	Weight
	Ah - V	mm	R.P.M	mm	mm	minutes	kg
DOS501	5 Ah - 18 V	125	7000 - 11000	3.0	300	69	1.23

### CORDLESS GREASE GUN

Compatible with standard 400g grease cartridge : DIN1284 & Lube-Shuttle.  
Overpressure protection included.  
LCD screen to control battery level.  
Provided with 1 meter flexible hose & 73 cm strap.




**DGG102K**

205 €

D

Without charger nor battery.



DGG102

**DGG102A1**

400 €

D



DGG102



DB1850 P



DC1840A

Consumables not available.

	Battery power	Length (without battery)	Pressure	Grease flow	Cartridge capacity	Battery life	Weight
	Ah - V	mm	bar	ml / min	g	minutes	kg
DGG102K	5 Ah - 18 V	395	482	94,6	400	90	2.4

**NEW**

**6500 lm**
**CORDLESS LED FLOODLIGHT**
**DWL101**
**139 €**
**D**


Without charger nor battery.

DWL101




	Battery power	Sizes	Brightness	Brightness on AC mains power	Battery life	Weight
	Ah - V	mm	lm	lm	hours	kg
DWL101	5 Ah - 18 V	300 x 252 x 145	1000 / 6500	900 / 3200	6 / 3	2.4


**7000 lm**
**CORDLESS LED FLOODLIGHT**
**DWL102**
**121 €**
**D**


Without charger nor battery.

DWL102



	Battery power	Sizes (without battery)	Brightness	Color temperature	Battery life	Weight
	Ah - V	mm	lm		hours	kg
DWL102	5 Ah - 18 V	180 x 145 x 440	2 000 / 7 000	white / warm	7.5 / 2.5	2.85



## CORDLESS PRESSURE WASHER & VACUUM BLOWER 18V 5AH

### CORDLESS PRESSURE WASHER



Water gun utilizes a three-piston pump with super silent anti-vibration technology to clean both quietly yet thoroughly.

Metal Pump with no possible leak of water and oil

Dual trigger system with double click power control to operate at low or high power

**DPW101**

122 €

D

Without charger nor battery.



Accessories included



1 high precision 4-in-1 multi pattern nozzle (rotating turbo nozzle, 20° fixed nozzle, 60° fixed nozzle, 0° pencil jet)



1 foaming nozzle to apply detergent



1 quick-connect 4M water inlet hose for drawing fresh water from any source (a bucket, a pool, a can, a pond etc.)



2 lances of 28,5 cm each or 57 cm total length

	Compatible battery	Water flow	Max pressure	Length	Hose length	Battery life	Weight
	Ah - V	L / min	bar	mm	M	minutes	kg
DPW101	DB1850P (18 V, 5 Ah)	2.8	25	876	4	High speed: 88 Low speed: 124	1.72

### CORDLESS VACUUM BLOWER


Efficiently vacuums up dust and liquids. Blast mode ideal for clearing debris from confined spaces. Automatic shut-off when water reaches maximum capacity to protect the motor.



Features a HEPA filter that is highly effective against dust and easy to replace.

Carrying shoulder strap

3.2-metre telescopic hose



4 rotating wheels



2 power settings :  
- low power (100 W) with a suction power of approx. 9 kPa.  
- full power (200 W) with a suction power of approx. 16 kPa.



**DDWV104KIT**

155 €

D

Without charger nor battery.



	Compatible battery	Suction power	Liquid tank capacity	Dust tank capacity	Battery life	Weight
	V - Ah	kPa	L	L	minutes	kg
DDWV104KIT	DB1850P (18 V, 5 Ah)	9 / 16	8	10	20 / 35	4.1

# THE PACKS **m7**<sup>®</sup>

## GARDEN

**NEW**

**5Ah / 18V**

**M7PACKV18**

779€ **D**

**POWER TOOL PACK WITH LINE TRIMMER, HEDGE TRIMMER, LEAF-BLOWER AND PRUNING CHAINSAW**

- 1 line trimmer (DST101)
- 1 hedge trimmer (DHT101)
- 1 leaf-blower (DLB102)
- 1 pruning chainsaw (DCCS101)
- 1 fabric tool box (BA80129)
- 2 batteries 18 V, 5 Ah (2x DB1850P)
- 1 charger (DC1840A)



**NEW**

**5Ah / 18V**

**M7PACKV19**

749€ **D**

**POWER TOOL PACK WITH 4-IN-1 GARDENING TOOL WITH 4 REMOVABLE HEADS AND LEAF-BLOWER**

- 1 4-in-1 gardening tool with 4 removable heads (DGM101SET)
- 1 leaf-blower (DLB102)
- 1 fabric tool box (BA80129)
- 2 batteries 18 V, 5 Ah (2x DB1850P)
- 1 charger (DC1840A)







# CORDLESS LEAF-BLOWER & BACKPACK SPRAYER 18V 5AH

## CORDLESS LEAF-BLOWER

Suitable for lawn maintenance, cleaning up dead leaves, dusting and removing snow. 2 clip-on parts air pipe for easy storage and set-up. Can be hung up vertically for convenient storage.

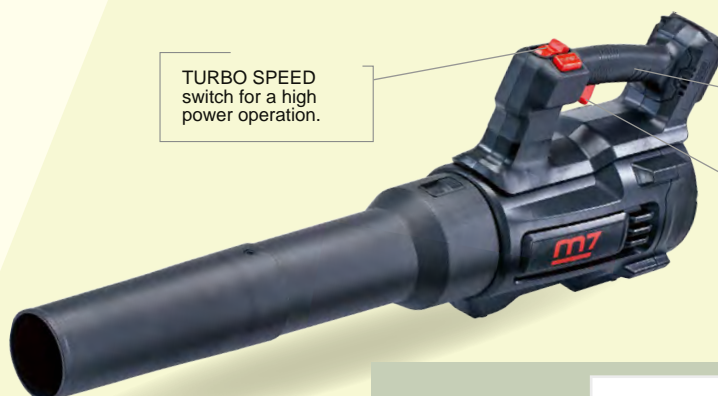

TURBO SPEED switch for a high power operation.

Ergomic handle with a comfortable grip for easy work.

Progressive trigger with a locking switch for a continuous operation.

**DLB102**

107 €

D

Without charger nor battery.



DLB102

**DLB102A**

379 €











D



DLB102

2x DB1850P

DC1840A

Compatible battery		Air speed	No-load speed	Second speed	Air flow	Dimensions	Sound level	Vibration level	Battery life	Weight
V - Ah		km/h	R.P.M	R.P.M	m³/min	mm	dBA	m/s²	minutes	kg
										
DLB102	DB1850P (18 V, 5 Ah)	162	7 100 - 11 600	14 000	6.5 - 10.7 / 13	816 x 166 x 288	96	0.2	12 / 24	2.6

## CORDLESS BACKPACK SPRAYER

Cordless tool allowing for free movement. 12 liter tank. Backpack model for great comfort even on long sessions.



**DGS101**

139 €

D

Without charger nor battery.



Accessories include:

- 1 telescopic metal lance (100 cm max)
- 1 plastic lance (58 cm)
- 5 nozzles:



single nozzle



bi-directional front and rear nozzles











swirl nozzle



4-hole nozzle




6-hole nozzle

Compatible battery		Water flow	Max. pressure	Tank capacity	Hose length	Sound level	Vibration level	Weight
V - Ah		l/min	bar	L	cm	dBA	m/s²	kg
								
DGS101	DB1850P (18 V, 5 Ah)	1.2	4.0 / 5.0	12	124	84.6	< 2.5	3.4


### 36 V

#### CORDLESS 4 IN 1 GARDENING TOOL

Designed to cut grass, trim bushes, branches or hedges with the same tool. Operates at 36 V for extended autonomy and higher intensity. Equipped with a strap to support the tool to relieve arms and back.

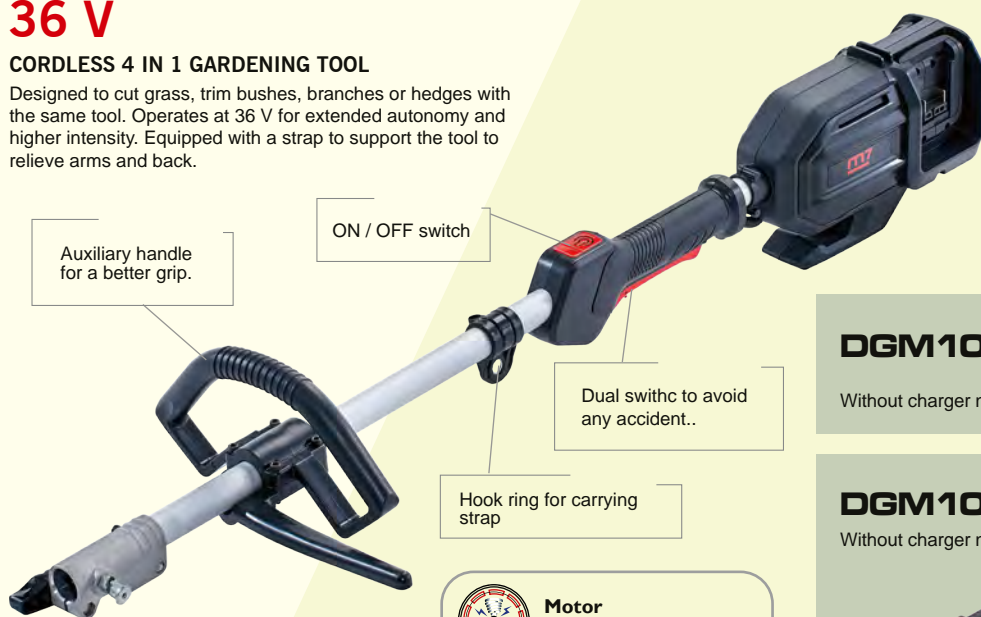

	Compatible battery	No-load speed	Weight
	V - Ah	R.P.M	kg
DGM101	2x DB1850P (2x 18 V, 5 Ah)	7 400	2.92



**DGM101**

129 €

D

Without charger nor battery.



**DGM101SET**

334 €


D

Without charger nor battery.



#### CORDLESS LINE TRIMMER

Best suited for garden, driveways and hedges maintenance. Tap and Go : gently tap head to easily remove the thread. Cordless tool allowing for free movement.

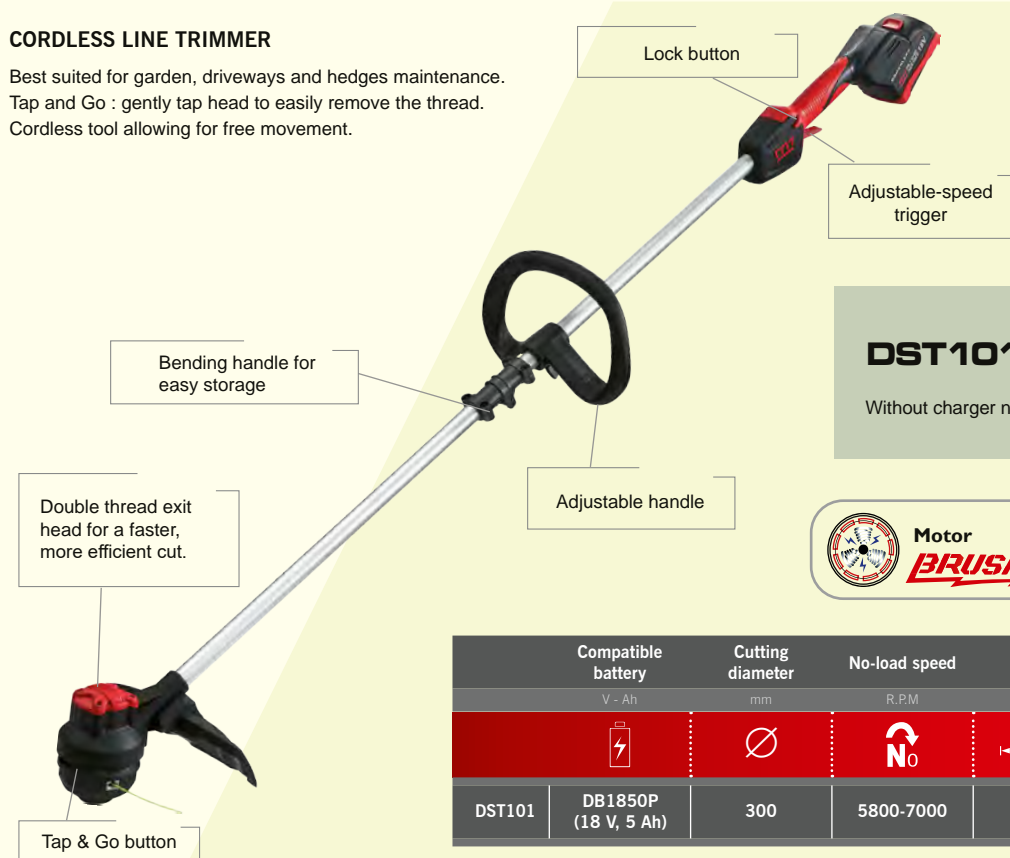

	Compatible battery	Cutting diameter	No-load speed	Length	Autonomy	Weight
	V - Ah	mm	R.P.M	mm	minutes	kg
DST101	DB1850P (18 V, 5 Ah)	300	5800-7000	876	36	2.59

**DST101**

158 €

D

Without charger nor battery.





## CORDLESS HEDGE TRIMMER & PRUNING CHAINSAW 18V 5AH

### CORDLESS HEDGE TRIMMER

Best suited for hedges, bushes and thin branches maintenance.

45° and 90° handle rotation.

Built-in battery protection system automatically shuts down motor power to extend battery life.

Handle rotation release button.

Safety guard

Dual switch safety trigger.

**DHT101**

85€

D

Without charger nor battery.



	Compatible battery	Shear speed	Cutting length	Cutting capacity - branch ø	No-load speed	Blade length	Teeth spacing	Weight
	V - Ah	S.P.M	mm	mm	R.P.M	mm	mm	kg
DHT101	DB1850P (18 V, 5 Ah)	2 800	538	19	1 400	610	26	2.6

### CORDLESS PRUNING CHAINSAW

Best suited for cutting branches and pruning trees.

The automatic chain lubrication system creates a smoother efficient cut and extends product lifetime.

Safety trigger with dual switch to avoid unintentional startup

Adjusting SDS chain does not require any tool which is easier to power on and allows for a quicker maintenance and setting.

Chain pitch :  
3/8" LP (9,5 mm)  
Chain type:  
E43-FL-40E

Rubber handle to reduce vibration when working.

Oil indicator allows to check oil level without disassembling

**DCCS101**

139€

D

Without charger nor battery.



	Compatible battery	Chain speed	Guide length	Cutting length	Dimensions	Oil tank capacity	Sound level	Battery life	Weight
	V - Ah	m/s	mm	mm	mm	ml	dBA	minutes	kg
DCCS101	DB1850P (18 V, 5 Ah)	9.3	254	200	451 x 255 x 198	120	98	16	2.7



Motor  
**BRUSHLESS**





# BOOST





## MULTIFUNCTION MINI BOOSTER



**8.0L**  
GASOLINE

**6.0L**  
DIESEL

⚡ PA **2000 A**  
⚡ CA **1200 A**

**12V - 24Ah**  
**ST1000**

172 €

B

**NEW**

**New mini booster model:  
even more powerful, in an ultra-practical design.**

Minibooster with the capacity to start all kind of gasoline vehicles up to 8 L & diesel up to 6 L.

**9 built-in protective functions:** protection against short circuits, polarity reversal, reverse charging, low voltage, overvoltages, overcurrents, overheating and excessive discharges.

Can be charged from the mains or the cigarette lighter.

2 output ports: USB-A 5V port and DC 12V port.

1 USB-C input port.

### 3-mode LED torch:

- continuous
- flashing
- SOS




40 x 50 mm LCD display:  
displays the battery status and power supply.

Crocodile Clips to start light vehicles (cars, motorcycles, motorhomes, snowmobiles, yachts, etc.).

Protective storage case.



## START BOOSTER AND COMPRESSOR

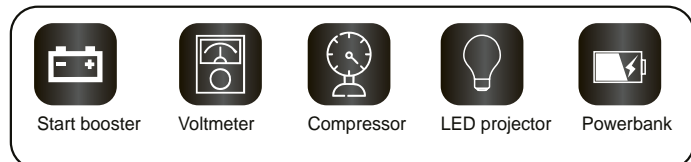

⚡ PA **2500 A**  
⚡ CA **1500 A**

**12V**  
**STBAT3**

287 €

D

Presetting tire pressure.

Compressor start-stop button.

Light  
300 lumen



Starting port

Compressor output port.

2x USB-A  
1x USB-C



Working temperature: -20°C ~ 50°C  
In-Output USB C: 5 ~ 20V / 3A PD 60W  
2x Output USB A: 5V/3A - 9V/2A - 12V/1.5A

	Battery capacity mAh	Battery capacity Wh	Power supply voltage V	Cranking amps (CA) A	Peak amps (PA) A	Pressure range bar	Starting cable length cm	Charging time hours	Brightness lumen	Dimensions mm	Weight kg
	⚡	⚡	⚡	⚡	⚡						
ST1000	24 000	88.8	12	1200	2000	-	-	-	-	230x146x57	1
STBAT3	6 166	74	12	1500	2500	0.7 - 10.3	50	± 1.5	300	251x138x65	1.36



Cable length  
**40 cm**

**12V - 25Ah**  
**ST3100**

426 € D

Cable length  
**114 cm**

**12V - 25Ah**  
**ST3100L**

448 € D

### START BOOSTER

Designed for professional interventions and repairs.  
High-performance, pure lead AGM battery.  
Colored LEDs indicating the booster's charge level.  
Protection against voltage surges.  
Integrated safety fuse.  
Insulated, brass-made, curved, durable and resistant pliers.  
ABS housing, lightweight and impact resistant.

- 1 self-regulating automatic charger (220 V) supplied.
- Number of batteries: 1
- Fuse on the positive clamp: 500A

**12/24V - 2x25Ah**  
**ST6200**

929 € D


### START BOOSTER

High-performance, pure lead AGM battery.  
Designed for professional interventions and repairs.  
Perfect to start trucks, agricultural machinery, public works machinery, which require very high starting power in the event of battery failure.  
Digital voltmeter indicating the booster's charge level.  
Protection against voltage surges.  
Large insulated, brass-made, durable and resistant pliers.  
ABS housing, lightweight and impact resistant.  
Integrated safety fuse.  
12 V / 24 V / OFF switch.  
Reverse polarity alarm.

- 1 self-regulating automatic charger (220 V) supplied
- Number of batteries: 2
- Fuse on the positive clamp: 500A



REVERSE  
POLARITY ALARM



DIGITAL  
VOLTMETER

**12/24V - 2x33Ah**  
**ST6400**

1429 € D

### START BOOSTER

High-performance, pure lead AGM battery.  
Designed for professional interventions and repairs.  
Perfect to start trucks, agricultural machinery, public works machinery, which require very high starting power in the event of battery failure.  
Digital voltmeter indicating the booster's charge level.  
Protection against voltage surges.  
Large insulated, brass-made, durable and resistant pliers.  
ABS housing, lightweight and impact resistant.  
Integrated safety fuse.  
12 V / 24 V / OFF switch.  
Reverse polarity alarm.

- 1 self-regulating automatic charger supplied
- Number of batteries: 2
- Fuse on the positive clamp: 500A



REVERSE  
POLARITY ALARM



TELESCOPIC  
HANDLE



DIGITAL  
VOLTMETER



WHEELS

	Voltage (DC)	Cable length	Clamps length	Cable section	Cranking amps	Peak amps	Dimensions	Weight
	V - Ah	cm	mm	mm²	A	A	mm	kg
ST3100	12V - 25Ah	40	175	25	1200	3100	260 x 120 x 330	10.93
ST3100L	12V - 25Ah	114	175	25	1200	3100	260 x 120 x 330	11.26
ST6200	12/24V - 2x25Ah	145	200	50	2400 / 1200	6200 / 3100	310 x 210 x 440	23.5
ST6400	12/24V - 2x33Ah	182	150	50	2540 / 1270	6400 / 3200	360 x 160 x 420	39



## 12V - 22Ah ST950

479€

D

### START BOOSTER

Solid electrolyte lead-acid battery (AGM), watertight, in compliance with I.A.T.A safety standards.

Built-in short-circuit fuse in the red clamp protects the booster battery and the vehicle.

Extremely supple start cables of optimum length.

Digital rectangular back-lit voltmeter shows the charge level at a glance.

Completely insulated brass clip and super flexible multicore copper cables.

Protection against power surges.

ON/OFF button.

Can be stored and used in all positions.

20A thermal circuit breaker.

- Clip opening: 30mm
- Number of batteries: 1



- Voltmeter on a LCD backlit screen



## SUPER-CAPACITOR BATTERY-LESS TECHNOLOGY

- > Back to back jump starts without stopping !
- > Ideal for breakdown recovery

## 12V STC1800

1155€

D

### START BOOSTER WITH A SUPER-CAPACITOR

Meets IATA safety standards.

Entirely insulated brass clips.

160 cm ultra-supple starter cables, made from multi-strand copper.

Negative polarity indicator.

Built-in short-circuit fuse in the red clamp protects the booster battery and the vehicle.

#### SUPER-CAPACITOR ADVANTAGES :

The booster recharges automatically in a few seconds, as soon as the vehicle has been jump started.

Does not contain a battery. This eliminates not only the problem of recharging between 2 jump starts but also problems related to low temperatures.

Reliable and durable.

Light.



- Voltmeter on a LCD backlit screen



	Voltage (DC)	Cable length	Clamps length	Cable section	Cranking amps	Peak amps	Dimensions	Weight
	V - Ah	cm	mm	mm <sup>2</sup>	A	A	mm	kg
ST950	12V - 22Ah	93	170	25	950	2500	335 x 163 x 415	11.5
STC1800	12V	160	170	25	1800	9000	335 x 163 x 415	9.8

### 12V - 8A BC1208

118€ **D**

#### BATTERY CHARGER

Electronic, digital, multi-stage charging and maintenance charger.  
Protection against polarity reversal and short circuits.  
Fixing hook.  
Ergonomic Design.  
Charge recovery function.  
13,8V - 5A Power function.

#### COMPATIBLE WITH

lead-acid battery



lithium battery



**Li**  
Lithium-compatible

Digital backlit display.



### 12/24V - 7A BC122407

114€ **D**

#### BATTERY CHARGER

The BC122407 Dual Voltage Professional Battery Charger is the ultimate tool for battery charging and maintenance.  
The adaptive charging process not only ensures that batteries are completely charged but also extends their life with its automatic reconditioning mode.  
Keep going in all environments due to the IP65 protection system.

**Li**  
Lithium-compatible

1 - 2 - 3 - 4 - 5 - 6 - 7

Multi-step Micro-processor controlled charging



Automatic maintenance mode



Energy efficient



Extends battery life



Protection against sparks



Dust & Water resistant


Recondition mode

Charge status

Supply mode

Mode selection

Voltage

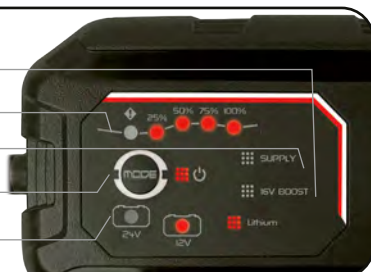

Car charger

	Voltage (DC)	Power supply voltage	Frequency	Rated current	Charging and testing stages	Charge capacity	Maintenance capacity	IP degree of protection	Size	Weight
	V - mAh	V	Hz	A		Ah	Ah		mm	Kg
					1 2 3					
BC1204	6 / 12	220 - 240	50 - 60	1 - 4	8	4 - 80	4 - 120	IP65	190 x 80 x 50	0.75
BC1208	12	220 - 240	50 - 60	2 - 8	9	5 - 160	5 - 250	IP65	230 x 100 x 65	1
BC122407	12 / 24	220 - 240	50	7.0	7	14 - 150	14 - 225	IP65	205 x 88 x 51	0.748





**12V - 5Ah**  
**STG5**

85 €

D

**12V - 10Ah**  
**STG10**

168 €

D

**12/24V - 15Ah**  
**STG15**

218 €

D

#### BATTERY CHARGER

The STG15 is the Ultimate Battery Charging, support and Diagnostic Tool. Combine intelligent charging, maintenance, supply, reconditioning and testing into one simple process with this easy to use Advanced Battery Charger.



Automatic  
maintenance  
mode



Energy  
efficient



Extends  
battery life



Protection  
against sparks



Alternator and  
battery test

#### COMPATIBLE WITH

lead-acid battery



lithium battery



1 2 3 4 5 6 7

Multi-step Micro-processor  
controlled charging

**Li**  
Lithium-  
compatible



	Voltage (DC)	Power supply voltage	Frequency	Rated current	Charging and testing stages	Charge capacity	Maintenance capacity	IP degree of protection	Size	Weight
	V - Ah	V	Hz	Ah		Ah	Ah		mm	Kg
					1 2 3					
STG5	12	220 - 240	50/60	5	7	1.2 - 110	1.2 - 160	IP65	123 x 123 x 46	0.564
STG10	12	220 - 240	50/60	10	7	24 - 200	24 - 250	IP65	185 x 185 x 68	1.3
STG15	12/24	220 - 240	50	15 / 7.5	7	24 - 300	24 - 500	IP20	190 x 190 x 75	1.5

**12V**  
**STT3** 126 € **D**

**ADVANCED BATTERY TESTER**

The STT3 12V Advanced Battery Tester is capable of diagnosing issues with a vehicle's electrical system by analyzing each component.  
Test the Battery, Alternator, Starter motor accurately and reliably in seconds.



**COMPATIBLE WITH**

lead-acid battery      lithium battery

**AGM**  
Flat+Spiral

**WET**  
Flooded

**MF**  
GEL+Ca/Ca

**EFB**  
START STOP

**LiFePo4**

**Li**  
Lithium-compatible




Test report via QR code for mobile display of results.



**12/24V**  
**STT13** 458 € **D**

**BATTERY TESTER WITH INTEGRATED PRINTER**

The STT13 12/24V Advanced Battery Tester is capable of diagnosing issues with a vehicle's electrical system by analyzing each component.  
Test the Battery, Alternator, Starter motor and Mass ground accurately and reliably in seconds.

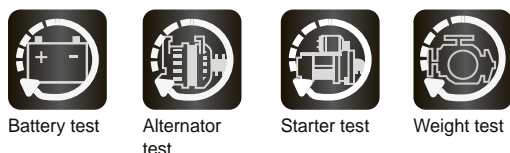

**COMPATIBLE WITH**

lead-acid battery      lithium battery

**AGM**  
Flat+Spiral

**WET**  
Flooded

**MF**  
GEL+Ca/Ca

**EFB**  
START STOP

**GEL**

**SPIRAL**

**LiFePo4**

**Li**  
Compatible lithium



Print the results and scan the QR code to share the test reports.

Integrated Printer.

Colour LCD Screen.

Responsive Touchpad.








Included SD Card.

Battery capacity	Battery capacity	Power supply voltage	Cranking amps	Peak amps	Pressure range	Starting cable length	Charging time	Brightness	Dimensions	Weight
mAh	Wh	V	A	A	bar	cm	hours	lumen	mm	kg
			⚡		⏏			⚖		
STT3			0 - 50		80 X 80 X 22			0.2		
STT13			-		101 x 240 x 38			0.693		



# m7 AIR




 Pin Less	 Rocking dog	 Twin Dog	 Twin Hammer
 New Twin Hammer	 Pin Clutch	 Jumbo Hammer	

-  Quiet model
-  Light product
-  Light product (magnesium)




## 5-IN-1 SET



**★★★ NEO405KIT** 419€ B

**PNEUMATIC TOOL SET - 5 PCS**


Quick-head-change system




**81 Nm**  
**NE9004**  
1/2" AIR RATCHET  
WRENCH



**2500 R.P.M**  
**QE2132**  
STRAIGHT DRILL  
Ø 10 MM (3/8")




**14000 R.P.M**  
**QA9620**  
90° ANGLE GRINDER  
Ø 6 & 3 MM



**14000 R.P.M**  
**QB9903**  
STRAIGHT DIE GRINDER  
Ø 75 MM




**20000 R.P.M**  
**QA9120**  
STRAIGHT DIE  
GRINDER  
Ø 6 & 3 MM



4,30 kg

	Max. torque	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Sound level	Vibration level	
	Nm	R.P.M	L/min	bar	mm	HP	kg	Inch	dBA	m/s²	
NE9004	1/2"	81	150	141	6.3	287	-	1.48	1/4"	82	5.2
QE2132	10mm (3/8")	-	2500	141	6.3	248	-	1.1	1/4"	82	1.5
QA9120	6 & 3mm	-	20 000	141	6.3	202	0.5	0.73	1/4"	82	3.5
QB9903	75mm (3")	-	14 000	141	6.3	211	0.5	0.9	1/4"	82	3.5
QA9620	6 & 3mm	-	14 000	141	6.3	208	0.5	0.9	1/4"	82	3.5


*Consumables not available*



**1/4" 1/4" 3/8" 1/2" ★★★**

**40 Nm**  
**NEO104KIT** 186€ B


MINI PNEUMATIC RATCHET WITH  
INTERCHANGEABLE SQUARE DRIVES



**1/4" ★★★**

**40 Nm**  
**NE271** 118€ B

MINI AIR RATCHET WRENCH



**3/8" ★★★**

**40 Nm**  
**NE371** 118€ B

MINI AIR RATCHET WRENCH

	Square drive	Torque range	Max. torque	Free speed	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level
	Inch	Nm	Nm	R.P.M	bar	mm	kg	Inch	Inch	dBA
NEO104KIT	1/4", 3/8", 1/2"	5-30	40	400	6.3	159	0.48	1/4"	3/8"	81.5
NE271	1/4"	5-30	40	300	6.3	134	0.45	1/4"	3/8"	81.5
NE371	3/8"	5-30	40	300	6.3	134	0.45	1/4"	3/8"	81.5













★★★  
 Ø 75 mm  
**QC113**

125 € B

MINI DISC ANGLE CUT-OFF

Disc diameter		Free speed	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level
mm (Inch)		R.P.M	bar	mm	HP	kg	Inch	Inch	dBA
					<b>hp</b>				
QC113	75 (3")	18 000	6.3	129	0.3	0.53	1/4"	3/8"	81.5



★★★ 6 & 3 mm  
 QA102A

86 € B









MINI STRAIGHT DIE GRINDER



★★★ 6 & 3 mm  
 QA602A

125 € B

MINI 90° ANGLE GRINDER

Collet size		Free speed	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level
mm		R.P.M	bar	mm	HP	kg	Inch	Inch	dBA
					hp				
QA102A	6 & 3	25 000	6.3	115	0.3	0.29	1/4"	3/8"	82
QA602A	6 & 3	18 000	6.3	126	0.3	0.43	1/4"	3/8"	81.5



★★★ 5500 RPM  
 QE102

153 € B









MINI ANGLE DRILL  
 With keyed chuck.



★★★ 5500 RPM  
 QE902

103 € B

MINI STRAIGHT DRILL  
 With keyed chuck.

Chuck diameter		Free speed	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level
mm		R.P.M	bar	mm	HP	kg	Inch	Inch	dBA
					<b>hp</b>				
QE102	1-6	5 500	6.3	140	0.3	0.60	1/4"	3/8"	81.5
QE902	1-6	5 500	6.3	158	0.3	0.48	1/4"	3/8"	81.5

**M10**  
**3/8"** ★★  
**102 Nm**  
**NC3410**  
"BUTTERFLY"  
IMPACT WRENCH

Rocking Dog

120€ B

**M13**  
**3/8"** ★★  
**474 Nm**  
**NC3210**  
COMPACT  
IMPACT WRENCH

Twin Hammer

248€ B

**M16**  
**1/2"** ★★  
**542 Nm**  
**NC498**  
COMPACT  
IMPACT WRENCH


Jumbo Hammer

271€ B

**NC498MA** 295€ B

IMPACT WRENCH SET WITH MINI  
SOCKETS - 8 PCS

- 1 1/2" impact wrench (NC498)
- 6 mini hex sockets:  
13, 17, 19, 21, 22, 24 mm
- 1 1/4" male thread coupling

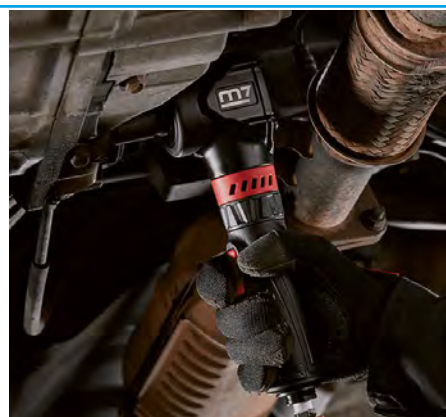

**NEW**

POWERFUL AND  
COMPACT

**M14**  
**1/2"** ★★  
**1496 Nm**  
**NC4660Q**  
COMPACT  
IMPACT WRENCH

Jumbo Hammer

269€ B

IDEAL TO REACH NUTS  
IN NARROW SPACES.

**M16**  
**1/2"** ★★  
**884 Nm**  
**NC4670Q**  
COMPACT AND COMPOSITE  
IMPACT WRENCH

Jumbo Hammer

204€ B

Reverse button can be  
used with one hand.

	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	ms <sup>-2</sup>
NC3410	3/8"	M10 (17)	7-68	102	10 000	71	6.3	159	0.8	1/4"	3/8"	92.1	3.6
NC3210	3/8"	M13 (20)	136-407	474	10 000	113	6.3	142	1.5	1/4"	3/8"	92.1	3.6
NC498	1/2"	M16 (24)	108-405	542	6500	119	6.3	88	1.37	1/4"	3/8"	85	2.0
NC4660Q	1/2"	M14 (22)	272-1224	1496	7000	134	6.3	134	1.75	1/4"	3/8"	85	2.4
NC4670Q	1/2"	M16 (24)	204-680	884	9 000	147	6.3	105	1.1	1/4"	3/8"	85	3.3





## PNEUMATIC IMPACT WRENCHES



**M16**  
**1/2"** ★★  
Jumbo Hammer

**900 Nm**  
**NC4650**  
COMPACT IMPACT WRENCH

224 € **B**

ALSO AVAILABLE IN SET



**NC4650MA**

246 € **B**

IMPACT WRENCH SET WITH  
MINI SOCKETS - 8 PCS

- 1x1/2" impact wrench (NC4650)
- 6 mini hex sockets:  
13, 17, 19, 21, 22, 24mm
- 1 1/4" male thread coupling



LIMITED  
QUANTITY!

**NC4650KIT**

323 € **B**

METRIC IMPACT SOCKET SET WITH  
ACCESSORIES - 11 PCS

- 1 1/2" impact wrench (NC4650)
- 7 standard hex impact sockets:  
13, 17, 19, 21, 22, 24, 27 mm
- 1 125mm extension bar
- 1 1/4" oiler
- 1 1/4" male thread coupling

3.91 kg



**M19**  
**1/2"** ★★  
Twin Hammer

**1088 Nm**  
**NC4299Q**  
COMPOSITE  
IMPACT WRENCH

159 € **B**

ALSO AVAILABLE IN SET



**NC4299QMB**

209 € **B**

IMPACT WRENCH AND SOCKET SET -  
13PCS

- 1 1/2" impact wrench (NC4299Q)
- 1 impact socket set:  
10, 11, 13, 17, 19, 22, 24, 27, 29,  
30, 32 mm
- 1 1/4" male thread coupling



**M25**  
**1/2"** ★★  
Twin Hammer

**1356 Nm**  
**NC4236A**  
IMPACT WRENCH

337 € **B**



**M25**  
**1/2"** ★★   
Twin Hammer

**1627 Nm**  
**NC4255QA**  
COMPOSITE  
IMPACT WRENCH  
7 spring-loaded blades

256 € **B**

ALSO AVAILABLE IN HARDCASE
















**NC4255QKIT**

358 € **B**

METRIC IMPACT SOCKET SET WITH  
ACCESSORIES - 11 PCS

- 1 1/2" impact wrench (NC4255QA)
- 7 standard hex impact sockets:  
13, 17, 19, 21, 22, 24, 27 mm
- 1 125 mm extension bar
- 1 1/4" oiler
- 1 1/4" male thread coupling

4.26 kg

	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s²
													
NC4650	1/2"	M16 (24)	244-542	900	9 000	132	6.3	104	1.4	1/4"	3/8"	95.0	2.4
NC4299Q	1/2"	M19 (30)	204-680	1088	8 500	133	6.3	194	2.1	1/4"	3/8"	85	3.2
NC4236A	1/2"	M25 (36)	271-949	1356	7 500	155	6.3	171	2.62	1/4"	3/8"	87.0	4.5
NC4255QA	1/2"	M25 (36)	271-1085	1627	8 500	136	6.3	179	1.7	1/4"	3/8"	85	4.7



**M25**  
**3/4"** **★ ★ ★**  
New Twin Hammer  
**1627 Nm**  
**NC6236**

382 € **B**

COMPACT  
IMPACT WRENCH



**M25**  
**3/4"** **★ ★ ★** **Mg**  
Twin Hammer  
**1762 Nm**  
**NC6255Q**

351 € **B**

COMPOSITE  
IMPACT WRENCH  
7 spring-loaded blades

ALSO AVAILABLE IN HARDCASE



**NC6255QKIT** 551 € **B**

METRIC IMPACT SOCKET SET WITH  
ACCESSORIES - 11 PCS

- 1 3/4" impact wrench (NC6255Q)
- 7 standard hex impact sockets:  
24, 27, 30, 32, 33, 34, 36 mm
- 1 175 mm extension bar
- 1 1/4" oiler
- 1 1/4" male thread coupling

kg 7.49 kg




**M27**  
**3/4"** **★ ★ ★** **Mg**  
Jumbo Hammer  
**1762 Nm**  
**NC6610Q**

301 € **B**

COMPACT  
IMPACT WRENCH

**36%** smaller  
**46%** lighter  
**6%** quieter  
than other 3/4" impact  
wrenches in the range.

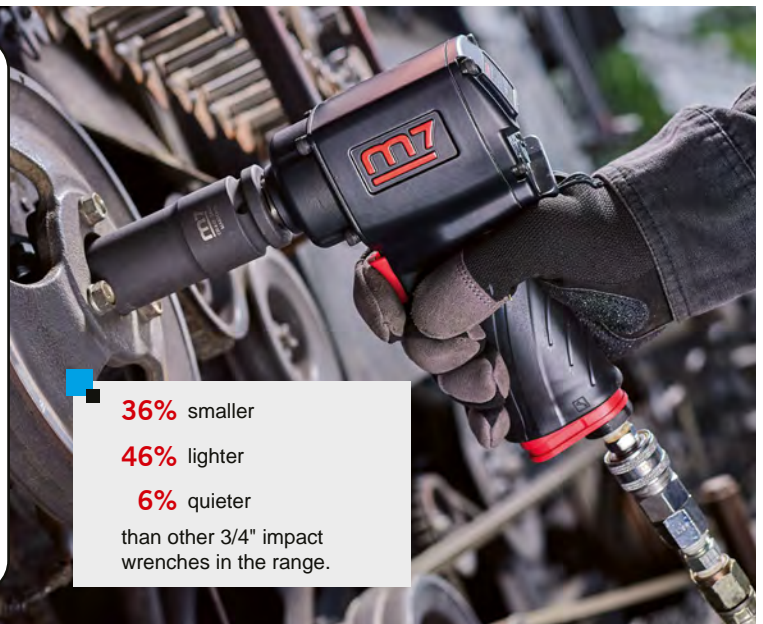

**M27**  
**3/4"** **★ ★ ★** **2034 Nm**  
Twin Hammer

**NC6218** 878 € **B**  
IMPACT WRENCH



**M30**  
**3/4"** **★ ★ ★** **Mg**  
Twin Hammer  
**2034 Nm**  
**NC6266**

649 € **B**

COMPOSITE  
IMPACT WRENCH  
6 spring-loaded blades





## PNEUMATIC IMPACT WRENCHES

M33

1"

★ ★ 2441 Nm

Pin Less

**NC8343\_**

IMPACT WRENCH

NC8343

Short anvil version: 381 mm

420€

B

NC83438

Long anvil version: 590 mm

420€

B



M33

1"

★ ★ ★ 3390 Nm

Twin Hammer

**NC8332X\_**

IMPACT WRENCH

NC8332X

Short anvil version: 372.6 mm

1028€

B

NC8332X6

Long anvil version: 525 mm

1044€

B



### SPRING-LOADED BLADES



The springs reduce the passage of impurities that could block the rotation of the rotor blades.

- ▶▶▶ Optimal performance, even with low pressure.
- ▶▶▶ Reduced air consumption.
- ▶▶▶ Increased service life and performance.

TIP: DON'T FORGET TO OIL YOUR IMPACT WRENCH REGULARLY, OR USE A M7 OILER



M35

1"

★ ★ ★ Mg 3118 Nm

Twin Hammer

**NC8266S\_**

COMPOSITE IMPACT WRENCH

NC8266S

Short anvil version: 430 mm

964€

B

NC8266S6

Long anvil version: 580 mm

1025€

B



6 spring-loaded blades



M35

1"

★ ★ ★ Mg

Twin Hammer

3118 Nm

**NC8266P**

942€

B

COMPOSITE IMPACT WRENCH

6 spring-loaded blades

Short anvil version: 256 mm

	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M.	L/min	bar	mm	kg	Inch	Inch	dBA	m/s <sup>2</sup>
NC6236	3/4"	M25 (36)	271-1220	1627	7 500	155	6.3	171	2.68	1/4"	1/2"	87	4.5
NC6610Q	3/4"	M27 (41)	203-1220	1762	7 000	144	6.3	138	1.8	1/4"	3/8"	85	3.1
NC6266	3/4"	M30 (46)	271-1760	2034	6 000	169	6.3	205	2.95	3/8"	1/2"	88	5.9
NC6255Q	3/4"	M25 (36)	271-1491	1762	8 500	136	6.3	198	1.9	1/4"	3/8"	85	4.7
NC6218	3/4"	M27 (41)	271-1898	2034	6 000	182	6.3	320	5.7	1/2"	1/2"	106	3.3
NC8343	1"	M33 (50)	271-2170	2441	3 900	325	6.3	381	12.56	1/2"	1/2"	103	6.3
NC83438	1"	M33 (50)	271-2170	2441	3 900	325	6.3	590	13.9	1/2"	1/2"	103	6.3
NC8332X	1"	M33 (50)	271-2710	3390	4000	226.5	6.3	372.6	9.4	1/2"	3/8"	103	8.2
NC8332X6	1"	M33 (50)	271-2710	3390	4000	226.5	6.3	525	10.6	1/2"	3/8"	103	8.2
NC8266S	1"	M35 (55)	272-2448	3118	4500	212	6.3	430	6.0	1/2"	1/2"	92	6.1
NC8266S6	1"	M35 (55)	272-2448	3118	4500	212	6.3	580	7.2	1/2"	1/2"	92	6.1
NC8266P	1"	M35 (55)	271-2710	3118	4500	254	6.3	256	5.90	1/2"	1/2"	92	6.1



**1/4"** ★★ 30 Nm  
**NE2905** 207 € B

EXTENDED AIR RATCHET WRENCH 290 MM



**1/4"** ★★ 50 Nm  
**NE261** 118 € B

PNEUMATIC RATCHET



**3/8"** ★★ 47.6 Nm  
**NE3803** 112 € B

PNEUMATIC RATCHET



**3/8"** ★★ 50 Nm  
**NE361** 114 € B

PNEUMATIC RATCHET



**1/2"** ★★ 68 Nm  
**NE421** 109 € B

PNEUMATIC RATCHET



"No reaction" -  
anti-backlash

**1/2"** ★★ 68 Nm  
**NE4901** 190 € B

"NO REACTION" PNEUMATIC RATCHET



Lock button

**1/2"** ★★ 81 Nm  
**NE432MA** 134 € B

PNEUMATIC RATCHET



**1/2"** ★★ 109 Nm  
**NE4808** 132 € B

PNEUMATIC RATCHET



**1/2"** ★★ 95 Nm  
**NE4305** 218 € B

LIMITED  
QUANTITY!

EXTENDED AIR RATCHET WRENCH 390 MM





## PNEUMATIC RATCHETS

1/2" ★★ 135 Nm

**NE483**

152 €


B

PNEUMATIC RATCHET



Reinforced gears  
for more durability

Double-speed trigger for  
better speed control



ALSO AVAILABLE IN SET



**NE483MA**

179 €


B

PNEUMATIC RATCHET WITH SOCKETS - 8 PCS

- 1 1/2" Pneumatic ratchet (NE483)
- 6 1/2" hex sockets: 13, 17, 19, 21, 22, 24 mm
- 1/4" male thread coupling



1.86 kg

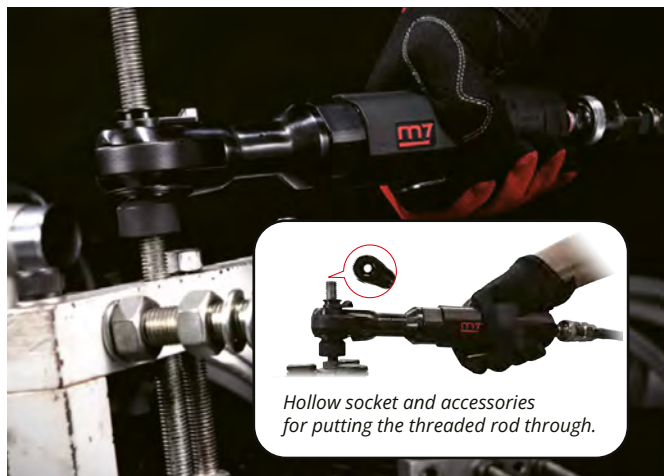

1/2" ○ ★★ 135 Nm

**NEO413**

351 €

B

PNEUMATIC RATCHET SET WITH  
ACCESSORIES - 13 PCS

- 1 1/2" pneumatic ratchet (NE461)
- 8 hex sockets: 8, 9, 10, 12, 13, 14, 17, 19 mm
- 1 75 mm extension bar
- 2 1/2" and 3/8" adaptor
- 1 1/4" male thread coupling



Hollow socket and accessories  
for putting the threaded rod through.



1/2" ★★ 204 Nm  
**NE4815A**

188 €

B

PNEUMATIC RATCHET



M14

1/2" ★★ 339 Nm  
**NE499**

390 €

B

PNEUMATIC RATCHET

	Square drive	Torque range	Max torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s <sup>2</sup>
NE2905	1/4"	7-20	30	300	85	6.3	290	0.84	1/4"	3/8"	89	4.4
NE261	1/4"	13.5-47	50	230	130	6.3	160	0.5	1/4"	3/8"	88	3
NE3803	3/8"	7-40	47.6	300	102	6.3	220	0.63	1/4"	3/8"	92	3.2
NE361	3/8"	13.5-47	50	230	130	6.3	160	0.5	1/4"	3/8"	88	3
NE421	1/2"	13.5-47	68	160	113.28	6.3	265	1.04	1/4"	3/8"	92.8	4.6
NE4901	1/2"	13.5-54	68	1100	85	6.3	159	0.67	1/4"	3/8"	89	2.2
NE432MA	1/2"	13.5-61	81	160	113.28	6.3	265	1.22	1/4"	3/8"	89.8	5.2
NE4305	1/2"	20-75	95	160	142	6.3	390	1.63	1/4"	3/8"	82	1.2
NE4808	1/2"	13.5-74	109	180	113	6.3	280	1.26	1/4"	3/8"	95	3.6
NE483	1/2"	13.5-88	135	250	141	6.3	277	1.28	1/4"	3/8"	85	2.0
NE461 (NE0413)	1/2"	13.5-88	135	180	113	6.3	270	1.20	1/4"	3/8"	83	2.3
NE4815A	1/2"	54.4-163	204	170	136	6.3	313	1.54	1/4"	3/8"	93	2.5
NE499	1/2"	68-203	339	7 500	69.4	6.3	340	1.83	1/4"	3/8"	93	9.9



★★★  
**QA141L**  
STRAIGHT DIE GRINDER  
279 € B



★★★  
**QA163L**  
STRAIGHT DIE GRINDER  
302 € B HEAVY DUTY



★★★  
**QA111A**  
STRAIGHT DIE GRINDER  
88 € B



★★★  
**QA311A**  
STRAIGHT DIE GRINDER  
137 € B



★★★  
**QA211A**  
STRAIGHT DIE GRINDER  
101 € B  
ALSO AVAILABLE IN HARDCASE



★★★  
**QA313A**  
STRAIGHT DIE GRINDER  
149 € B



★★★  
**QA315**  
STRAIGHT DIE GRINDER  
166 € B

★★★  
**QA0215A**

140 € B

**STRAIGHT DIE GRINDER SET WITH ACCESSORIES - 15 PCS**

- 1 grinder (QA211A)
- 1 collet 3mm (1/8") and 6mm (1/4")
- 2 flat spanners for dismantling
- 5 grindstones (3mm - 1/8"): W145, W153, W163, W170, W176
- 5 grindstones (6mm - 1/4"): W220, W187, A22, A12, A5
- 1 Male thread coupling



kg 1.30 kg



★★★  
**QA611A**  
90° ANGLE GRINDER  
121 € B



★★★  
**QA688A**  
AIR DIE GRINDER FLEX-HEAD  
Power regulator  
194 € B



	Collet size	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s²
						<b>hp</b>					
QA141L	6	24 000	396	6.3	170	0.4	0.6	1/4"	3/8"	75	2.5
QA163L	6	16 000	141	6.3	350	0.9	1.31	1/4"	3/8"	75	2.8
QA111A	6 & 3	25 000	283	6.3	155	0.3	0.38	1/4"	3/8"	81.5	1.8
QA211A	6 & 3	20 000	283	6.3	190	0.9	0.65	1/4"	3/8"	75.7	0.8
QA311A	6 & 3	25 000	283	6.3	190	0.3	0.48	1/4"	3/8"	81.5	1.8
QA313A	6 & 3	25 000	283	6.3	235	0.3	0.58	1/4"	3/8"	81.5	1.8
QA315	6 & 3	25 000	283	6.3	280	0.3	0.63	1/4"	3/8"	81.5	1.8
QA611A	6 & 3	19 000	283	6.3	160	0.3	0.51	1/4"	3/8"	74.4	1.7
QA688A	6 & 3	20 000	283	6.3	178	0.3	0.65	1/4"	3/8"	80	1.1



## PNEUMATIC MICRO DIE GRINDERS

★★ QA412

212 €

B

MICRO DIE GRINDER



★★ QA421

196 €

B

MICRO DIE GRINDER



★★ QA432

159 €

B

MICRO DIE GRINDER



★★ QA511

118 €


B

ENGRAVING PEN



	Collet size	Free speed	Blows frequency	Air consumption	Air pressure	Length	Hose length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	R.P.M	Blows per minutes	L/min	bar	mm	mm	kg	Inch	Inch	dBA	m/s²
QA412	3	60 000	-	76	6.3	170	1 500	0.24	1/4"	3/8"	70	0.5
QA421	3	60 000	-	76	6.3	150	1 500	0.22	1/4"	3/8"	70	0.5
QA432	3	70 000	-	29	6.3	137	1 425	0.20	1/4"	3/8"	70	0.5
QA511	-	-	13 000	29	6.3	140	1 420	0.23	1/4"	3/8"	78	0.6

Consumables not available



## PNEUMATIC ANGLE GRINDERS



★★ Ø125 mm

QB135X

201 €

B

ANGLE GRINDER WITH LEVER TYPE THROTTLE



★★ Ø125 mm

QB7215M


316 €

B

ANGLE GRINDER WITH LEVER TYPE THROTTLE



	Disc diameter	Bore	Thread	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm (Inch)	mm		R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s²
QB135X	125 (5")	22	M14*P2.0	11 000	170	6.3	230	0.78	1.81	1/4"	3/8"	87.8	1.2
QB7215M	125 (5")	22	M14*P2.0	11 000	119	6.3	232	1.3	1.81	1/4"	3/8"	90	1.2



## PNEUMATIC GRINDERS



★★ Ø75mm

QC213

95,80 €

B

GRINDER



★★ Ø75 mm

QC253

136 €

B

GRINDER

	Disc diameter	Thread	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm (Inch)	mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s²
QC213	75 (3")	10	20 000	283	6.3	200	0.9	0.86	1/4"	3/8"	80.2	10.8
QC253	75 (3")	-	24 000	113	6.3	203	0.6	0.8	1/4"	3/8"	91.0	1.2



★★ Ø152 mm  
○5 mm

**QB45602**

248 € **B**

VACUUM RANDOM ORBITAL SANDER

Consumables not available



★★ Ø152 mm  
○5 mm

**QB54602**

195 € **B**

VACUUM RANDOM ORBITAL SANDER



★★ Ø152 mm  
○5 mm

**QB47602**

267 € **B**

VACUUM RANDOM ORBITAL SANDER  
With central vacuum and suction hose.



★★★  
Ø100x110 mm  
○2,5 mm

**QB48111**

201 € **B**

AIR JITTERBUG SANDER



	Disc diameter	Number of holes	Orbit	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm (Inch)	-	mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s <sup>2</sup>
QB45602	152 (6")	15	5	10 000	109	6.3	193	0.24	0.84	1/4"	3/8"	81.6	2.2
QB54602	152 (6")	6	5	10 000	85	6.3	210	0.24	0.78	1/4"	3/8"	81.6	1.5
QB47602	152 (6")	6	5	10 000	109	6.3	193	0.24	1.13	1/4"	3/8"	84.7	2.2
QB48111	100x110	-	-	11 000	198	6.3	130	0.28	0.91	1/4"	-	83	1.5



★★ Ø76 mm

**QP113**

175 € **B**

MINI SANDER



★★ Ø76 mm

**QP123**

183 € **B**

MINI POLISHER



★★ Ø30 mm  
○3 mm

**QP111**

156 € **B**

MINI ANGLE SANDER



★★  
Ø75 mm,  
Ø113 mm,  
Ø125 mm

**QP215**

122 € **B**

3-DISC REVOLVER GRINDER



★★ Ø178 mm

**QP317**

304 € **B**

BUFFER



★★ **QP123AQP04**

392 € **B**

POLYCARBONATE HEADLIGHT RENOVATION FOAM SET WITH SANDER AND POLISHER - 8 PCS

- 1 mini sander (QP113)
- 1 mini polisher (QP123)
- 2 1/4" male thread coupling
- 1 hard polishing pad (QB9403)
- 1 medium polishing pad (QB9413)
- 2 tightening spanners

2,33 kg

	Thread	Disc diameter	Orbit	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm (Inch)	mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s <sup>2</sup>
QP113	5/16"-24	76 (3")	2.5	15 000	99	6.3	127	0.4	0.72	1/4"	3/8"	74	0.3
QP123	5/16"-24	76 (3")	-	2 100	99	6.3	135	0.4	0.77	1/4"	3/8"	74	0.21
QP111	M10xP1.5	26 (1")	3	8 000	152	6.3	160	0.3	0.55	1/4"	3/8"	89	0.3
QP215	7/16"-20	75-113-125	-	16000	184	6.3	160	0.8	1.20	1/4"	3/8"	60	1.8
QP317	5/8"-11	178	-	2500	169	6.3	406	0.4	2.04	1/4"	3/8"	84	2.5





## PNEUMATIC BELT SANDERS



★★ 10 mm

**QB311**

168€



**BELT SANDER**

Consumables not available



★★ 20 mm

**QB312**

312€



**BELT SANDER**



**QB325N**

372€



**BELT SANDER SET**

Belt speed controller.

	Belt size	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s <sup>2</sup>
QB311	10x330	16 000	226	6.3	290	0.8	1/4"	3/8"	89.7	0.5
QB312	20x520	16 000	254	6.3	360	1.2	1/4"	3/8"	91.8	0.4
QB325N	6x330 - 10x330 - 20x330 - 20x520	16 000	113	6.3	320	2.1	1/4"	3/8"	90.0	1.0

## PNEUMATIC SCREWDRIVERS



★★ 12 Nm

**RA101A**

**STRAIGHT  
SCREWDRIVER**

Twin Dog

91,80€



**Twin Dog**

Self-tapping screws for plastic / wood



★★ 16.3 Nm

**RA302**

165€



**ADJUSTABLE  
SCREWDRIVER**

Adjustable Clutch



★★ 13.5 Nm

**RA301**

152€



**ADJUSTABLE  
SCREWDRIVER**

Adjustable Clutch



**Adjustable  
Clutch**



Self-tapping screws for thick material / sheet metal

★★ 19 Nm

**RA402**

326€



**POSITIVE CLUTCH  
SCREWDRIVER**

Adjustable Clutch



**Positive  
Clutch**



Screws for wood

The positive clutch allows an effective transfer of torque, a reduced response time and continuous operation.

	Hex drive	Torque range	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch (mm)	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s <sup>2</sup>
RA101A	1/4" (6.35)	5-12	9 000	170	6.3	166	0.6	1/4"	3/8"	85.7	2.2
RA301	1/4" (6.35)	5-13.5	1 800	170	6.3	190	1.1	1/4"	3/8"	95.3	4.2
RA302	1/4" (6.35)	5-16.3	800	170	6.3	226	1.3	1/4"	3/8"	96.5	2.2
RA402	1/4" (6.35)	6-19	2200	111	6.3	180	1.1	1/4"	3/8"	91	2.3



★★★  
**1800 RPM**  
**QE331**

108€ B

REVERSIBLE DRILL WITH  
KEYLESS CHUCK



★★★  
**2200 RPM**  
**QE332**

97€ B

DRILL WITH  
KEYLESS CHUCK



★★★  
**1600 RPM**  
**QE633**

186€ B

ANGLE DRILL WITH  
KEYLESS CHUCK

★★★  
**800 RPM**  
**QE341**

176€ B

REVERSIBLE DRILL WITH  
KEYLESS CHUCK













★★★  
**2200 RPM**  
**QE432**

180€ B

KEYLESS  
CHUCK DRILL



Chuck diameter		Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
mm		R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s²
						hp					
QE331	10 (3/8")	1800	184	6.3	203	0.65	1.1	1/4"	3/8"	96.5	0.3
QE332	10 (3/8")	2200	184	6.3	190	0.60	1	1/4"	3/8"	96.5	0.3
QE341	13 (1/2")	800	184	6.3	230	0.65	1.8	1/4"	3/8"	96.5	0.1
QE633	10 (3/8")	1600	85	6.3	209	0.50	1.1	1/4"	3/8"	72	2.5
QE432	10 (3/8")	2200	135	6.3	226	0.70	1.18	1/4"	3/8"	90.0	3.0





★★ **PA201** 469€ B

## RIVETER

Hydropneumatic system


With nosepieces: 2.4, 3.2, 4.0, 4.8, 6.0, 6.4 mm.

★★ **PA301** 192€ B

## RIVETER

Hydropneumatic system

With nosepieces: 2.4, 3.2, 4.0, 4.8 mm.

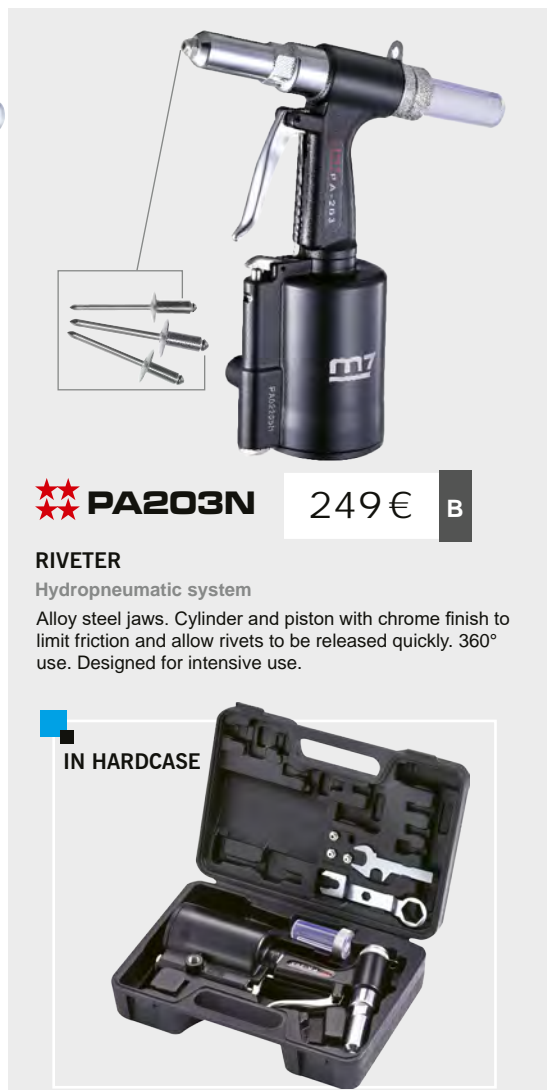

★★ **PA203N** 249€ B

## RIVETER

Hydropneumatic system

Alloy steel jaws. Cylinder and piston with chrome finish to limit friction and allow rivets to be released quickly. 360° use. Designed for intensive use.

IN HARDCASE



★★ **PB2402** 702€ B

## INSERT RIVETER

Hydropneumatic system

Inserts not included.

	Capacity	Stroke length	Traction	Air consumption	Air pressure	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	mm	kg.-f	L/cycle	bar	kg	Inch	Inch	dBA	m/s²
PA201	2.4~6.4	14	1603	2.32	6.3	1.8	1/4"	3/8"	79.7	0.8
PA301	2.4~4.8	16	1045	1.48	6.3	1.5	1/4"	3/8"	79.7	0.3
PA203N	3.2~6.4	16	1200	1.48	6.3	1.5	1/4"	3/8"	79.7	0.5
PB2402	Steel M4~M10 Stainless M4~M8	9	1650	1.5	6.3	1.55	1/4"	3/8"	82	0.8

RIVETER	MATERIAL		RIVET DIAMETER (ØMM)							
M7 PART NUMBER	RIVET	CHUCK	(2.5) 2.4	(3.0) 3.2	4.0	(5.0) 4.8	6.4	8.0		
<b>PA201</b>	aluminum	aluminum								
	aluminum	steel								
	steel	steel								
	stainless	steel								
<b>PA203N</b>	stainless	stainless								
	aluminum	aluminum								
	aluminum	steel								
	steel	steel								
<b>PA301</b>	stainless	steel								
	stainless	stainless								
	aluminum	aluminum								
	aluminum	steel								

**NEW**
**MINI**

**SN1350**
**200 €**
**B**
**MINI AIR NEEDLE SCALER**

Low Vibration, Easy to Control.  
Ultra-Lightweight, One-Handed Use.  
Fast & Efficient Surface Cleaning.  
12 Steel Needles for Hard-to-Reach Areas.


**SN1288**
**151 €**
**B**
**NEEDLE SCALER**

For hard to reach areas.


**SN2110**
**292 €**
**B**
**NEEDLE SCALER**

Pistol style.  
Designed to withstand intense use.  
Light and easy to use.

	Needle diameter	Number of needles	Stroke length	Blows per minute	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm		mm	bpm	L/min	bar	mm	kg	Inch	Inch	dBA	m/s <sup>2</sup>
SN1350	2x100	12	15	6 000	28.3	6.3	251	0.65	1/4"	3/8"	80	1.5
SN2110	3x180	19	33	3 700	424	6.3	330	2.8	1/4"	3/8"	97	9.7
SN1288	3x125	12	32	5 500	85	6.3	290	1.3	1/4"	3/8"	86	7.7


**PNEUMATIC SHEARS AND SAWS**

**QD321**
**230 €**
**B**
**-30%**
**STRAIGHT SABRE SAW**

Air exhaust designed to reduce vibrations by 30%. Long stroke to optimise efficiency by 20%.


**QD221**
**212 €**
**B**
**STRAIGHT SABRE SAW**

Set of 5 files and 2 blades included



Ø 4.0 mm


**QG102**
**105 €**
**B**
**STRAIGHT SHEAR**

**QG103**
**108 €**
**B**
**NIBBLER**

Reinforced punch for increased operating life. Die adapted for round cuts. Ø 4.5mm.

	Cutting capacity	Cut length	Strokes per minute	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	mm	S.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s <sup>2</sup>
QD321	-	14.5	11000	113	6.3	230	0.6	1/4"	3/8"	83	2.0
QD221	1.6	10	5000	113	6.3	250	0.8	1/4"	3/8"	81.9	4.1
QG102	Stainless : 1 Steel : 1.2 Aluminium : 1.6	-	2600	170	6.3	254	1	1/4"	3/8"	85.8	2.4
QG103	Steel : 1.2 Aluminium : 1.6	-	2 600	85	6.3	193	1	1/4"	3/8"	88	1.6





## PNEUMATIC HAMMERS



**SC211C**

111€ B

**ROUND CHISEL CHIPPING HAMMER**  
5 chisels included



**SC342**

187€ B

**HEX CHISEL CHIPPING HAMMER**



**SC221C**

113€ B

**HEX CHISEL CHIPPING HAMMER**

5 chisels included



ALSO AVAILABLE IN HARDCASE



**SC0617C**

**CHIPPING HAMMER SET WITH ACCESSORIES - 7 PCS**

- 1 hex chisel chipping hammer (SC221C)
- 5 chisels (SC425)
- 1 retaining spring

130€ B



**SN1032**

180€ B

**QUICK RELEASE STRAIGHT CHIPPER**  
1 chisel included



**SC371C**

244€ B

**ROUND CHISEL CHIPPING HAMMER**  
5 chisels included



	Type of fitting	Shank diameter	Stroke length	Blows frequency	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
		mm	mm	Blows per minutes	L/min	bar	mm	kg	Inch	Inch	dBA	m/s <sup>2</sup>
	● ● ●			bpm								
SC221C	●	10	67	3200	113	6.3	175	1.7	1/4"	3/8"	98	12.3
SC342	●	10	92	2200	232	6.3	228	2	1/4"	3/8"	94.7	10.6
SC211C	●	10.2	67	3200	113	6.3	175	1.7	1/4"	3/8"	98	12.3
SC371C	●	10.2	62.5	3000	180	6.3	180	1.7	1/4"	3/8"	95	8.8
SN1032	■	13	33	4000	120	6.3	290	1.33	1/4"	3/8"	91	14.5

## PNEUMATIC GREASE GUNS



**SG405**

79,80€ B

**GREASE GUN**  
SG902 adapter included



**SG407**


144€ B

**GREASE GUN**  
Continuous flow  
SG212 flexible hose and SG902 adapter included



! ONLY WORKS WITH 400 CC GREASE CARTRIDGES

	Working pressure	Max. pressure	Cartridge capacity	Net weight	Air inlet	Air hose	Sound level	Vibration level
	bar	bar	C.C	kg	Inch	Inch	dBA	m/s <sup>2</sup>
		MAX						
SG407	2.8 - 8.24	10.5	400	1.6	1/4"	3/8"	74	2
SG405	2.8 - 8.24	10.5	400	1.46	1/4"	3/8"	80.2	0.7

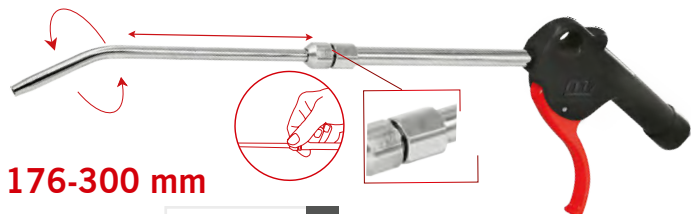

176-300 mm

**JC202**

20 €

B

EXPANDABLE BLOW GUN



Movable venturi nozzle

**JC602**

37 €

B

HIGH-FLOW BLOW GUN

**JC4\_**

WIDE NOZZLE PROGRESSIVE BLOW GUN

**JC405**

125 mm version

9 €

B

**JC410**

150 mm version

12 €

B

**JC412**

300 mm version

13 €

B

**JC424**

600 mm version

22 €

B

**JC435**

875 mm version

28 €

B

Wide nozzle

Metallic Nozzle

**JC116LD**

400 mm version

43,50 €

B

**JC122LD**

560 mm version

50 €


B

2-IN-1 AIR BLOW GUN

Designed for narrow spaces.

Effective internal cleaning for hard-to-reach areas like radiators and cylindrical filters.

NEW

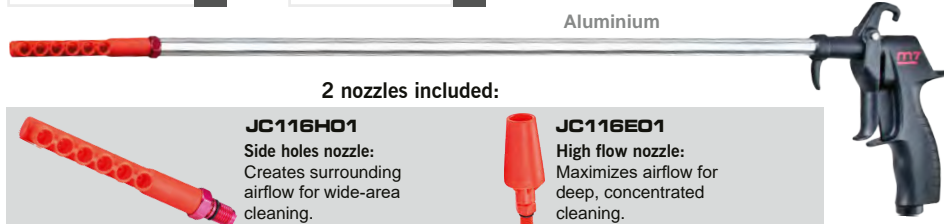


Aluminium

2 nozzles included:

**JC116H01**

Side holes nozzle:  
Creates surrounding  
airflow for wide-area  
cleaning.

**JC116E01**

High flow nozzle:  
Maximizes airflow for  
deep, concentrated  
cleaning.

**1M**  
**JC641**

62 €

B

ANGLED BLOW GUN



Aluminium

Fixed venturi nozzle

**1M/2M**  
**JC680**

89 €

B

BLOW GUN

1m extension included










Aluminium

2m

Movable venturi nozzle

Removable extension

	Nozzle length	Working pressure	Max. pressure	Air consumption		Net weight	Air inlet	Air hose	Sound level
	mm	bar	bar	L/min	L/min	kg	Inch	Inch	dBA
		Working	MAX						
JC202	176 - 300	6.2-8.5	11.7	-	144	0.22	1/4"	3/8"	90
JC602	50.8	6.2-8.3	15.6	368	425	0.60	1/4"	3/8"	90
JC405	125	5.3-8.5	10.6	368	425	0.11	1/4"	3/8"	90
JC410	250	5.3-8.5	10.6	368	425	0.12	1/4"	3/8"	90
JC412	300	5.3-8.5	10.6	368	425	0.13	1/4"	3/8"	90
JC424	600	5.3-8.5	10.6	368	425	0.14	1/4"	3/8"	90
JC435	875	5.3-8.5	10.6	368	425	0.25	1/4"	3/8"	90
JC116LD	400	5.3-8.5	11.7	140	-	0.206	1/4"	3/8"	90
JC122LD	560	5.3-8.5	11.7	140	-	0.245	1/4"	3/8"	90
JC641	1000	5.3-8.5	10.6	368	425	0.34	1/4"	3/8"	90
JC680	2000	5.3-8.5	10.6	368	425	0.64	1/4"	3/8"	90



# PNEUMATIC TOOLS

## TORQUE TESTS

Our torque tests are carried out in accordance with the ISO standard, using a 3-metre hose and air pressure set at 6.3 bars.



### **Torque capacity** [Tightening test]

*Torque range* – The range (2 values) reached by the tool after 8 seconds, defined by the lowest speed (1st value) and the highest speed (2nd value) when tightening a fastener.



### **Max torque** [loosening test]

*Max torque* - The maximum torque reached by the tool, after 5 seconds, when loosening a free fastener.

## CLASSIFICATION



### **Efficiency / performance**

Simple use for completing tasks quickly. These tools combine efficiency and performance.



### **Strength**

These tools produce high torque levels, superior grinding power and strong cutting energy.




### **Endurance**

Tools built to last with a low failure rate.

## TORQUE LOSS PROBLEMS


1

Check that the selector is in the correct position



3

Put 5 drops of pneumatic oil into the air inlet then press the trigger



2

Check that the air pressure reaches 90 PSI (6.3 bars)




4

Send the tool to the service centre



**m7** **AUTO**

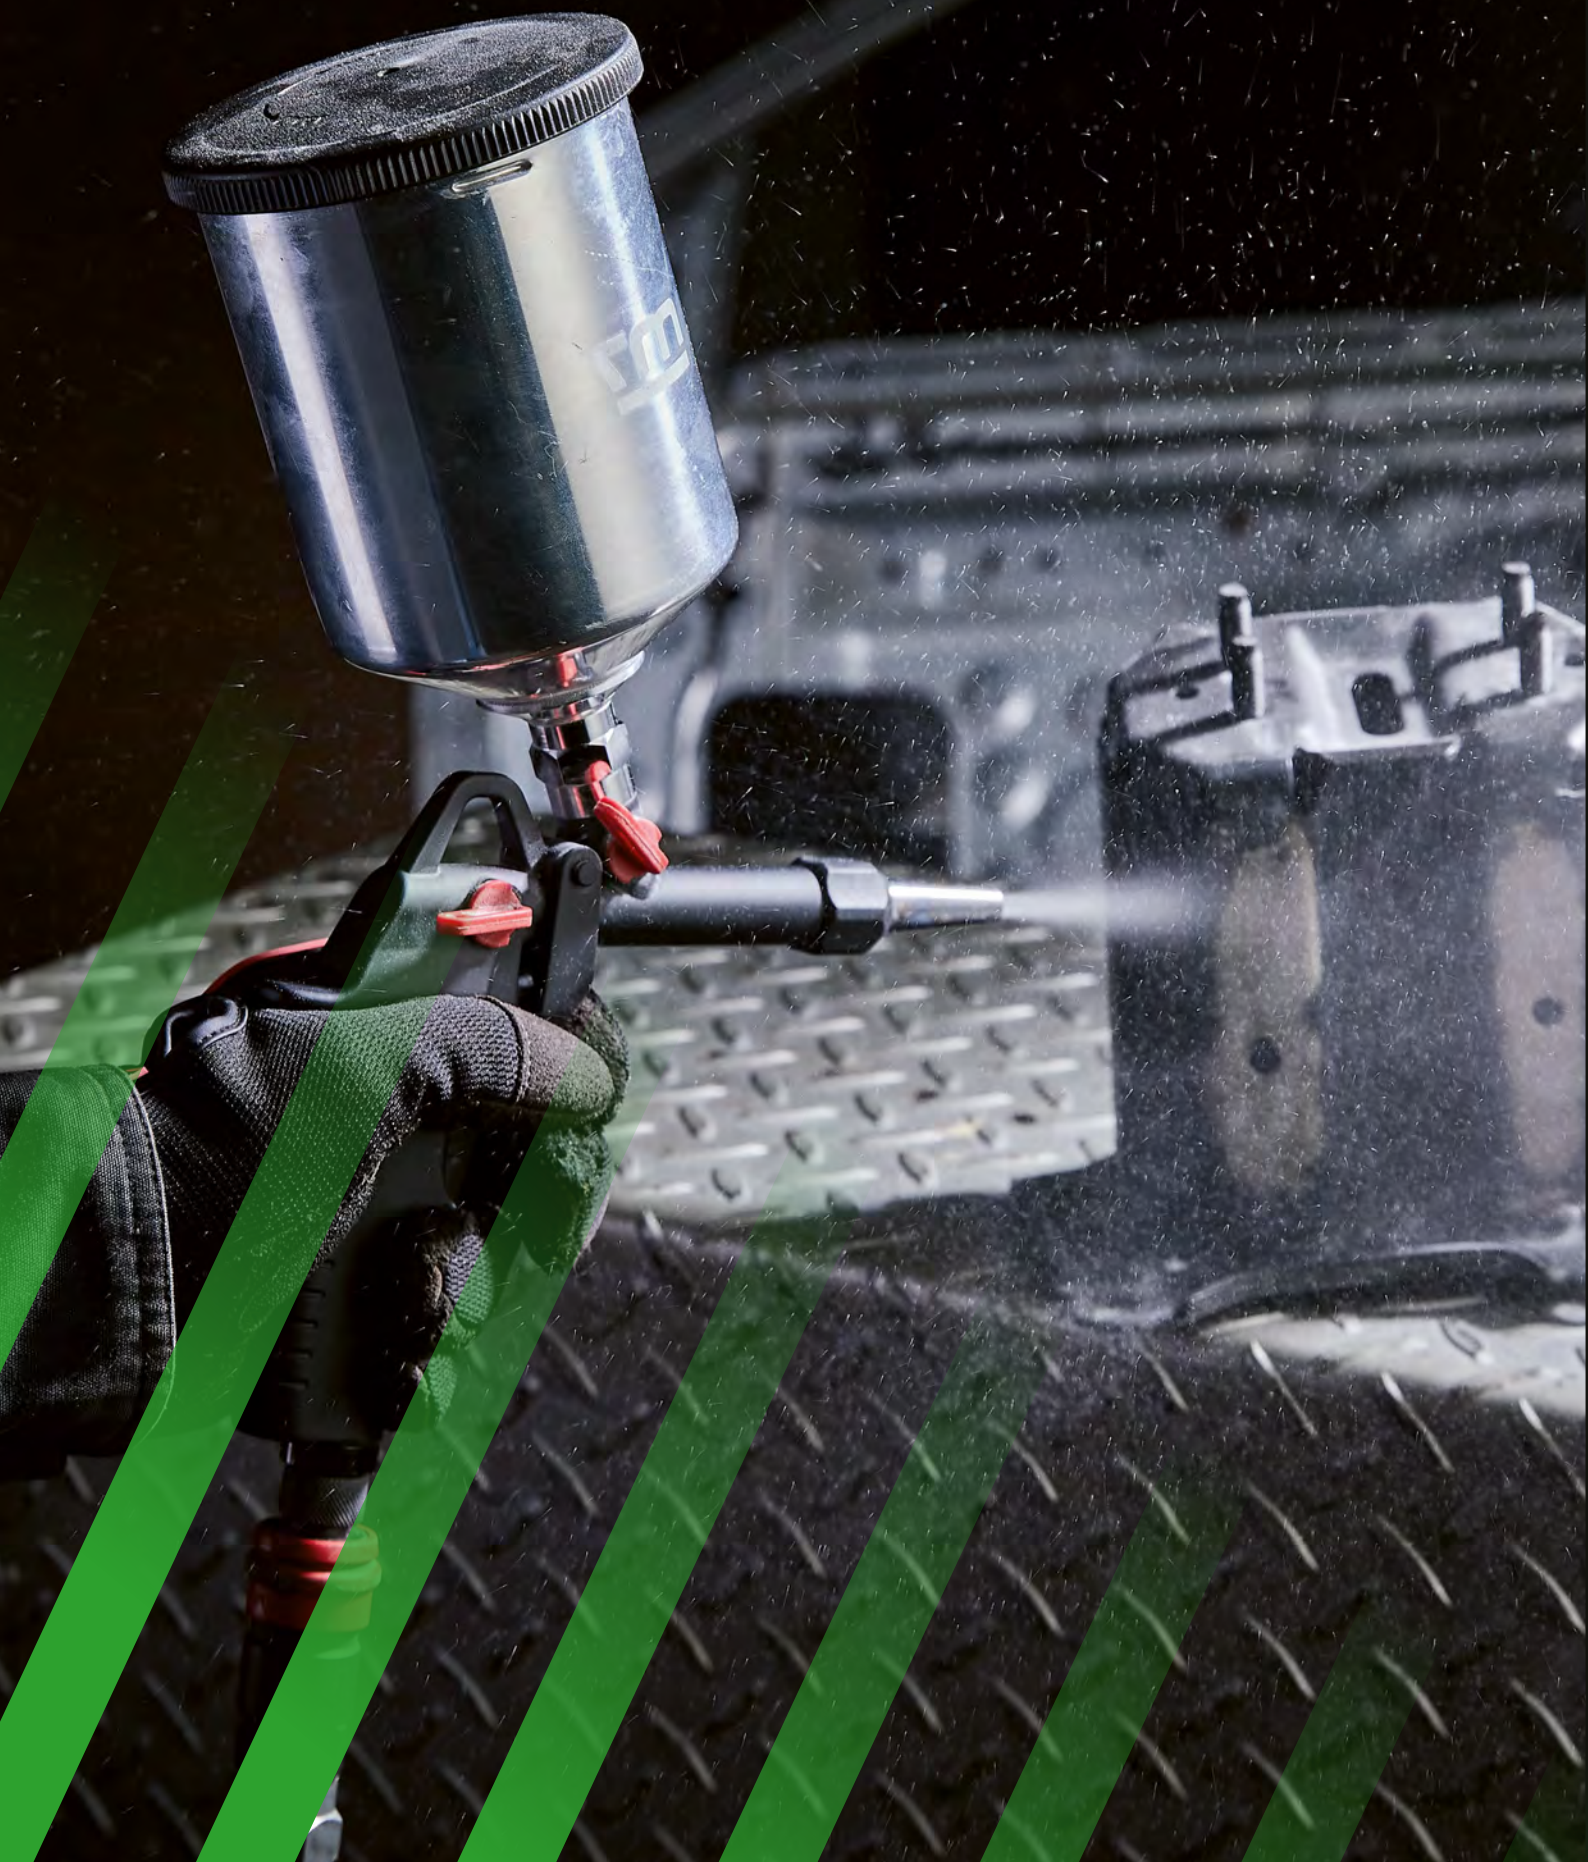



M8

1/4"



Rocking Dog

NC0208M

230 €














B

1.75 kg

### PRE-CALIBRATED IMPACT WRENCH FOR GLOW PLUGS - 9PCS

- 1 impact wrench
- 5 1/4" deep sockets: 8, 9, 10, 11, 12 mm
- 1 50mm extension bar
- 1 1/4" 37mm joint
- 1 1/4" male thread coupling



	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s²
													
NC2710	1/4"	M8 (13)	10-40	40	11 000	150	6.3	136	0.8	1/4"	3/8"	91.0	3.4



QK111

165 €









B

### PNEUMATIC OSCILLATING KNIFE

Blade can be mounted in 12 different ways depending user's needs. Reduced vibrations.

Curved blade included QK2030P



	Strokes per minute	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	S.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s²
	S.P.M								
QK111	20 000	170	6.3	180	1.1	1/4"	3/8"	75	3.9



QB802

251 €

B

### PNEUMATIC SCRUBBER

Can be used to remove rust, oxide, tags, stickers, etc. without heat up damaging the paint.

Durable, easy to use and does not get hot during operation



ALSO AVAILABLE IN HARDCASE



QB0808M










393 €

B

### PNEUMATIC SCRUBBER SET WITH ACCESSORIES - 6 PCS.

- Pneumatic buffer (QB802)
- Rubber brush
- Scouring wheel
- Straight metal brush
- Hooked metal brush
- 1/4" male thread coupling



	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air hose	Sound level	Vibration level
	R.P.M	L/min	bar	mm	HP	kg	Inch	dBA	m/s²
									
QB802	3600	300	6.3	200	0.7	1.2	3/8"	86	0.3

## SQ0104

102 €

B

### BRAKE CALIPER WIND BACK KIT - 4 PCS

- Pneumatic caliper wind back tool
- Adaptor for SAAB, HONDA, ALFA ROMEO, AUDI, VW, LANCIA
- 3/8" #5 adaptor
- 1/4" Male thread coupling



ALSO AVAILABLE IN HARDCASE

NEW

## SQ0218

193 €

B

### PNEUMATIC BRAKE CALIPER WIND BACK KIT - 18 PCS

- 1 pneumatic wind back tool
- 17 adaptors for disc brakes (right and left gage)



3.2 kg

## SR2001KIT

78 €

B

- 1 1.5m long Air Hose (M5\*0.45)
- 1 glazed reservoir van 22 cm³
- 1 50 c.c. Glass Jar
- 1 Airbrush
- 1 Wall bracket
- 1 2c.c. Cup
- 1 adapter M5\*0.45 male to 1/4" female
- 1 Spanner
- 1 8c.c Cup

### AIR BRUSH KIT

Dual action trigger to control the paint flow. Wall bracket included, allowing you to store the airbrush when it is at rest. Air volume adjustment button. Lightweight and ergonomic body, ideal for one-handed use. Ultra-fine 0.3mm nozzle for high precision.

	Nozzle diameter	Capacity	Air hose
	mm	cm³	Inch
SR2001KIT	0.3	2 - 8	1/4"



## SK1010

52 €

B

### AIR CAULKING GUN

Progressive trigger, automatic decompression in the stop position. For a simple and precise application of numerous cartridge products: glue, silicon etc.



## SK1131

182 €

B

### AIR CAULKING GUN

Progressive trigger, automatic decompression in the stop position. For a simple and precise application of numerous cartridge products: glue, silicon etc.

	Reservoir capacity	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose
	ml	L/min	bar	mm	kg	Inch	Inch
SK1010	300	113	3.4-4.8	305	1.1	1/4"	3/8"
SK1131	300 - 600	113	4.1-6.2	620	1.21	1/4"	3/8"

## Ø25-110mm QM1125

247 €

B

### PNEUMATIC BELLOWS SPREADER

For easy fitting of CVJ boots.

Do not use with a pressure exceeding 8.6 bars.



	Joint diameter	Air pressure	Length	Net weight	Air inlet	Air hose
	mm	bar	mm	kg	Inch	Inch
QM1125	25-110	6.3-8.6	442	3.25	1/4"	3/8"



## ★ ★ 1L SX2101 CLEANING GUN

Rotating metal nozzle. Equipped with a valve for cleaning and drying. Ideal for removing stains from fabric or carpets, removing grease from bodywork and for cleaning engine blocks, radiators and oil stains.

143 € B



## 2L SM0502 FLUID EXTRACTOR 2L Pneumatic version

For brake fluid. Delivered with a 1L bottle equipped with a locking clamp to easily fill the tank with brake fluid. New safety design: when the tank is full, the air inlet mechanism automatically shuts down. Delivered with 1 main hose (1.30m) + 1 spiral brake hose (1.20m) + 1 secondary hose (1.12m).

254 € B

## 9L SM0901

287 € B

## FLUID EXTRACTOR 9L Pneumatic or manual version

For engine oil pans, transmission oil, coolant, power steering fluid, brake fluid, etc. Works with or without air compressor thanks to the integrated manual pump. New safety design: when the tank is full, the air inlet mechanism automatically shuts down. Delivered with 1 main hose (1.30m) + 1 spiral brake hose (1.20m) + 1 secondary hose (1.12m).



⚠ Do not use with flammable liquids.

⚠ Do not use with flammable liquids.

	Reservoir capacity	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level
	L	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA
SX2101	1 L	5 500	56.6	6.3	210x110	0.78	1/4"	3/8"	85
SM0502	2 L	-	166	4.8-11.6	350	2.5	1/4"	-	-
SM0901	9 L	-	166	4.8-11.6	640	4.7	1/4"	-	-

## WG202N

81 € B

## AIR WONDER GUN KIT - 8 PCS

Used for cleaning or vacuuming dust, wood chips, filings, broken glass, etc. Double function: vacuum and blow gun

- 1 Gun
- 1 Vacuum tip
- 1 Thin tip
- 1 Flexible nylon brush tip
- 1 Fixed extension
- 1 Flexible extension
- 1 Textile vacuum bag
- 1 Clip
- 1 Male thread



## SX4101 78 € B

## PNEUMATIC SAND BLASTER (0.6 L)


- Cylindrical nozzle.  
Carbon steel S45C nozzle.
- Particle Size - Mesh (#) Max.: 80
  - Particle Size - Micron (µm) Max.: 177
  - Particle Size - (mm) Max.: 0.177



	Joint diameter	Reservoir capacity	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	L	L/min	bar	mm	kg	Inch	Inch	dBA	m/s <sup>2</sup>
WG202N	-	-	3.36	6.3	145	0.6	1/4"	3/8"	92	7.5
SX4101	-	0.6	226.5	6.3	197	0.36	1/4"	3/8"	82.0	-



# GARAGE

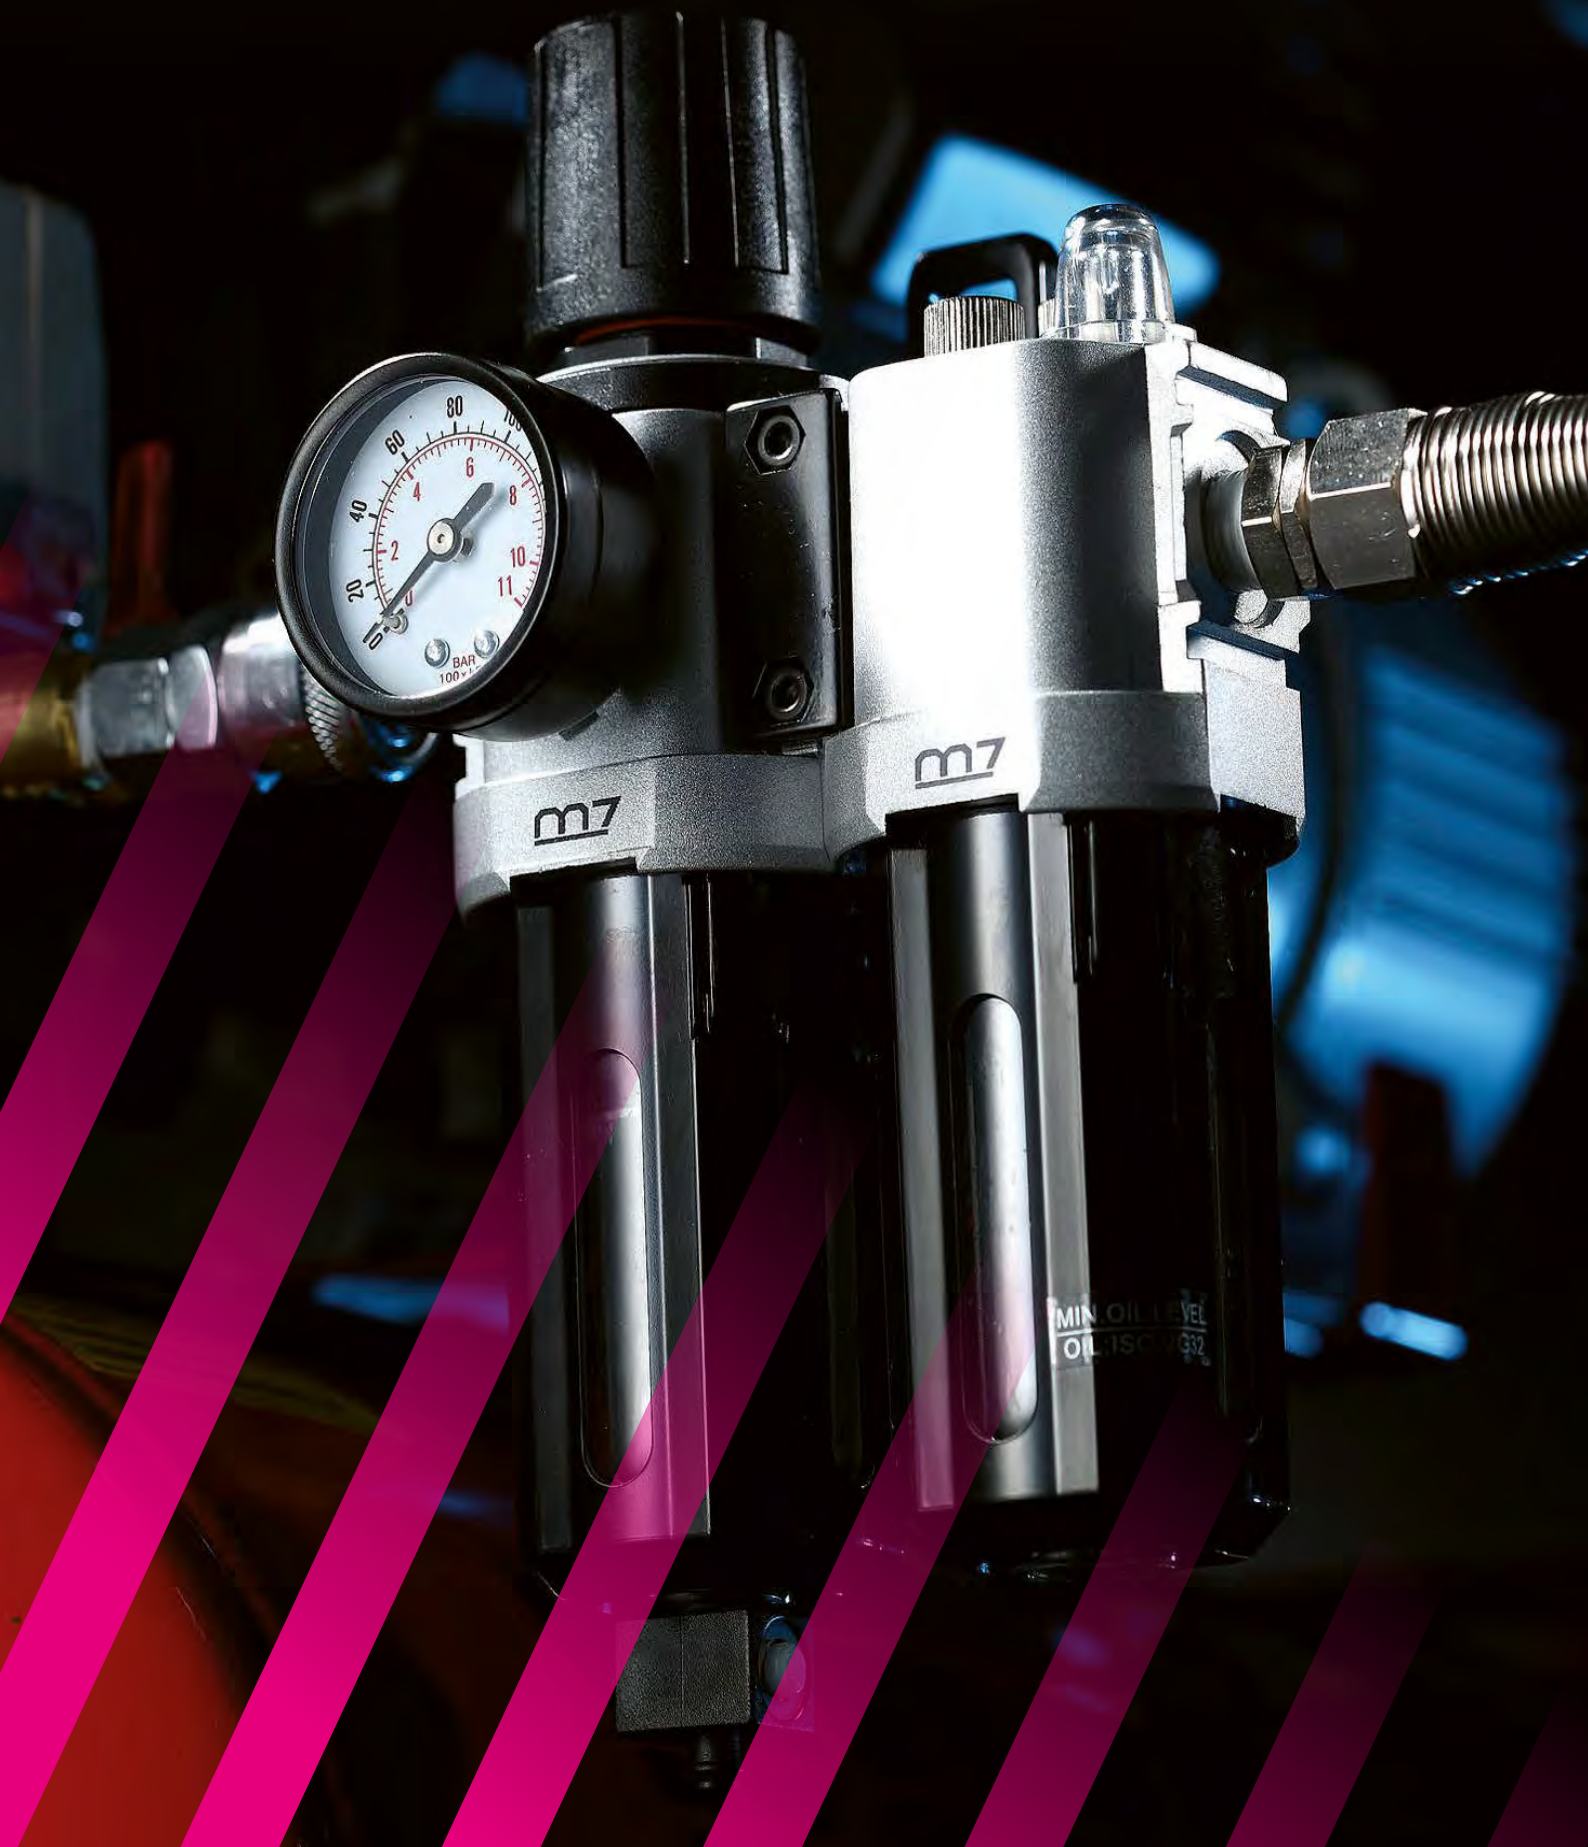



1/4" OR 3/8"

## SW1\_A

### OILER

Air inlet: 1/4". Max. oil content: 8cc. Connect directly to the hose for automatic lubrication.

SW12A  
1/4" - 100g version

7,50 € B



SW13A  
3/8" - 130g version

7,70 € B

## SGU202

### LUBRICATING OIL CAN FOR PNEUMATIC TOOLS

Low pouring point (anti-freeze). Contains extreme-pressure and anti-wear additives. Good protection against corrosion. Optimised demulsification (fast separation in case of pollution by water condensation). Viscosity level at 40°C: 22.

12,60 € B



## SG101

25,40 € B

### LUBRICATION KIT

Injection into lubrication inlet. Working temperature: -20°C to 180°C. Saves on maintenance costs. Stops corrosion of parts. Improves performance. Prolongs tool-life.



## LUBRICATOR AND REGULATOR FILTERS

1/4"



SV2260 98 € B

### LUBRICATOR AND REGULATOR FILTER

Can even be filled under pressure.

NEW

3/8"



SV2360 103 € B

### LUBRICATOR AND REGULATOR FILTER

Can even be filled under pressure.

1/2"




SV2431 194 € B

### LUBRICATOR AND REGULATOR FILTER

Can even be filled under pressure.

	Max input pressure	Output adjustable air pressure	Air flow	Threads (inlet/outlet)	Temperature range	Filtration	Condensate tank capacity	Oil tank capacity	Weight
	bar	bar	l/min	pouces	°C	µm	ml	ml	kg
SV2260	15	4.8 - 9.6	1750	1/4"	5~60	5	80	150	0.97
SV2360	15	4.8 - 9.6	2500	3/8"	5~60	5	80	150	1.4
SV2431	20	4.8 - 9.6	3400	1/2"	5~60	40	80	200	1.5

Recommended air regulation system :

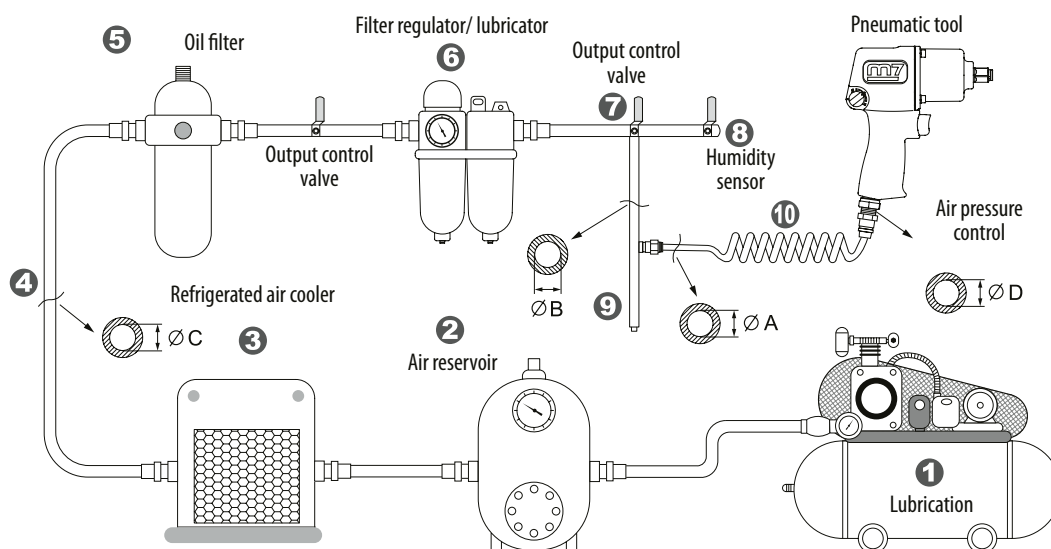



**SB201** 70€ **B**  
**DIGITAL TYRE INFLATOR**

Measures from 0 to 12 bars with an accuracy of 0.01 bars.  
Clip retainer.  
30cm version



**SB215** 71€ **B**  
**DIGITAL TYRE INFLATOR**

Measures from 0 to 12 bars with an accuracy of 0.01 bars.  
Clip retainer.  
150cm version



**SD2\_**  
**SPIRAL EXTENSION**  
Polyurethane

**10M**  
SD23210  
10M (5mm) version

27,20€ **B**

SD23110  
10M (8mm) version

45,30€ **B**

**15M**  
SD23115  
15M (8mm) version

58,30€ **B**

SD23315  
15M (10mm) version

69€ **B**

SD24415  
15M (13mm) version

76,20€ **B**



**1/4" 25 M**  
**SD26125A** 62,40€ **B**

**1/4" PNEUMATIC HOSE**  
Ideal for work under high pressure.  
Light, flexible, durable and anti-erosion PVC Hose.  
Fittings resistant up to 17.8 bar and perfectly sealed.



**SA3\_A**  
**PNEUMATIC HOSE REEL**  
SA3215A  
15M, 1/4" version  
144€ **D**

SA3315A  
15M, 3/8" version  
144€ **D**



**SA4\_A**  
**PNEUMATIC HOSE REEL**  
SA4320A  
20M, 3/8" version  
329€ **D**

SA4420A  
20M, 1/2" version  
388€ **D**

	Air consumption	Air hose	Internal diameter	External diameter	Hose length	Working pressure	Max. pressure	Male thread	Net weight
	L/min	Inch	mm	mm	M	bar	bar	inch	kg
SB201	39	3/8"	-	-	-	6.3	11	1/4"	0.32
SB215	39	3/8"	-	-	-	6.3	11	1/4"	0.32
SA3215A	-	-	8	12	15	6.3	20	1/4"	5
SA3315A	-	-	10	15	15	6.3	20	3/8"	6
SA4320A	-	-	10	15	20+1	6.3	20	3/8"	24
SA4420A	-	-	13	18	20+1	6.3	20	1/2"	29
SD23210	-	-	5	8	10	7	17.8	1/4"	0.935
SD23110	-	-	8	12	10	7	17.8	1/4"	0.5
SD23115	-	-	8	12	15	7	17.8	1/4"	1.35
SD23315	-	-	10	15	15	7	17.8	3/8"	1.9
SD24415	-	-	13	18	15	7	17.8	1/2"	2.1
SD26125A	-	-	8	14	25	7	17.8	1/4"	4



**SA10\_D**  
 ELECTRIC  
 CABLE REEL

 SA1015D  
 15M - 1.5mm² version

156 €

D

 SA1020D  
 20M - 1.5mm² version

187 €

D

 SA1115D  
 15M - 2.5mm² version

205 €

D

	Cable length	Wire cross section	Number of wires	Power	Dimensions	Weight
	M	mm²		V	mm	kg
SA1015D	15	1.5	3	230	350x180x325	5.8
SA1020D	20	1.5	3	230	350x180x325	5.8
SA1115D	15	2.5	3	230	350x180x325	6.8



## EXTRACTORS

**SC0320**

402 €

B

**AIR VIBRATION INJECTOR  
 PULLER - 24 PCS**

Designed to replace the sliding hammer without hand using.  
 Save the power and time to pull out the injector from engine.  
 High torque and two speeds designed to pull out the injector quickly.


 Connecting Injector  
 adaptor (M18x1.5)
Speed  
adjusting ring

1/4" Air input

Adapters included :

M20	M18	M17	M10	M8	M8	M22	M20	M31	M26
P1.0	P0.75	P1.0	P1.5	P1.25	P1.0	P1.5	P1.5	P0.75	P0.75

M18	M16	M14	M14	M29	M27	M27	M25	M25	
P1.5	P1.5	P1.5	P1.5	P1.0	P1.0	P0.75	P1.0	P0.5	


**SC005**

53 €

B

**BALL JOINT & TIE-ROD SPLITTER  
 SET - 5 PCS**

- Steering ball joint separator - 17mm
- Steering ball joint separator - 23mm
- Pitman arm tool - 28mm
- Air hammer adaptor - 184mm
- Air hammer adaptor Ø 10,2mm

	Piston Stroke	Blows frequency	Max. torque	Thread	Air pressure	Max air pressure	Length	Net weight	Air inlet	Air hose
	mm	Blows per minutes	Nm	L/min	bar	bar	mm	kg	Inch	Inch
SC0320	38	300/900	600	M18 x 1.5	6-9	10	500	2.7	1/4"	12



1/2"

**SH1001**

49,80 € **B**

### MAGNETIC MOUNT FOR AIR TOOLS

Compatible with all 1/2" air impact wrenches (except compact and mini ranges).



3/4"

**SH1002**

26,30 € **B**

### MAGNETIC MOUNT FOR AIR TOOLS

Compatible with all 3/4" air impact wrenches (except compact and mini ranges).



**QB46602AJC**

199 € **B**

### SANDER AND AIR GUN FOAM SET - 7 PCS

Extendable air gun. Comes with 2 disk mountings.



**BA80129**

22 € **D**

### TOOL BAG

8 inside pockets, 3 outside pockets and 1 net pocket on the outside. Diagonal strap for balance. Opens 100%. Hard rubber base (anti-slip / shock-proof). 40x22x30cm.



**SP105 5 kg**

### SPRING BALANCER

84,60 € **B**

Practical and compact, these balancers have a rotating wheel for easy cable tension setting. Stainless steel housing. Ball locking system to prevent the cable from retracting into the housing.

	Lifting capacity	Cable Length	Type	Cable diameter	Net weight
	kg	m		mm	kg
SP105	3-5	1.5	Cable	3.2	0.81



**M7S9509**

135 € **D**

### POWER TOOLS STORAGE RACK WITH POWER STRIP




**1/4"** ★★ **1.5-30 Nm**  
**GTA201030** 359 € B  
 DIGITAL ANGULAR TORQUE WRENCH

**3/8"** ★★ **6.8-135 Nm**  
**GTA306135** 369 € B  
 DIGITAL ANGULAR TORQUE WRENCH


**1/2"** ★★ **17-340 Nm**  
**GTA417340** 449 € B  
 DIGITAL ANGULAR TORQUE WRENCH

**3/4"** ★★ **100-1000 Nm**  
**GTA610100** 1455 € B  
 DIGITAL ANGULAR TORQUE WRENCH

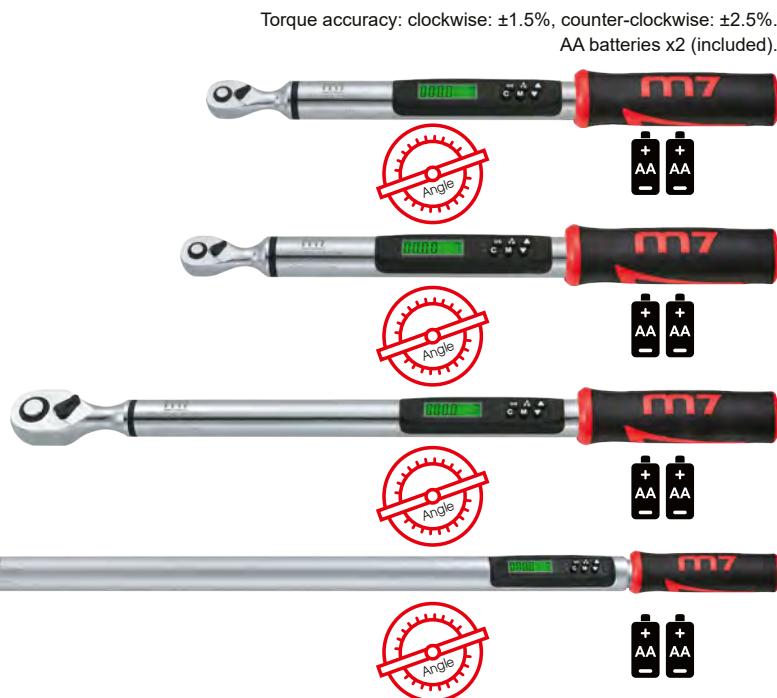

**1/2"** **6-60 Nm**  
**GDI406060** 489 € B  
 DIGITAL TORQUE WRENCH WITH  
 INTERCHANGEABLE RATCHET

**1/2"** **34-340 Nm**  
**GDI434340** 555 € B  
 DIGITAL TORQUE WRENCH WITH  
 INTERCHANGEABLE RATCHET

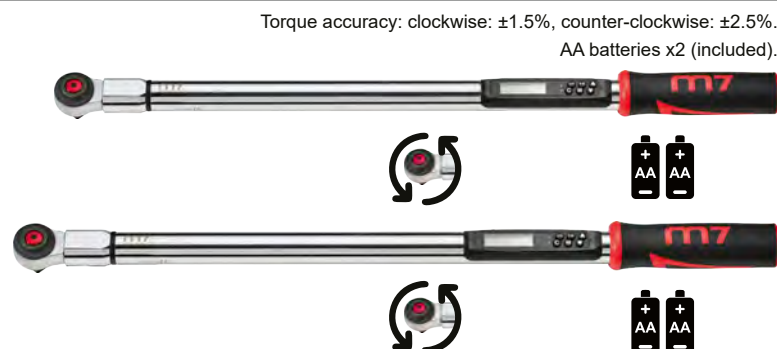

**1/2"** ★★ **6-60 Nm**  
**GBI406060** 609 € B  
 BLUETOOTH DIGITAL TORQUE WRENCH  
 WITH INTERCHANGEABLE RATCHET

**1/2"** ★★ **34-340 Nm**  
**GBI434340** 675 € B  
 BLUETOOTH DIGITAL TORQUE WRENCH  
 WITH INTERCHANGEABLE RATCHET



	Square drive	Gear	Torque range	Torque indicator	Torque adjustment	Dimensions	Net weight
	Inch	teeth	Nm			mm	kg
GTA201030	1/4"	72	1.5-30	LCD	digital	410 x 38 x 38	0.71
GTA306135	3/8"	72	6.8-135	LCD	digital	432 x 38 x 38	0.84
GTA417340	1/2"	72	17-340	LCD	digital	622 x 41 x 38	1.4
GTA610100	3/4"	24	100-1000	LCD	digital	1235 x 58 x 63	4.6
GDI406060	1/2"	72	6-60	LCD	digital	450 x 31 x 37	1.10
GDI434340	1/2"	72	34-340	LCD	digital	659 x 31 x 37	1.40
GBI406060	1/2"	72	6-60	LCD	digital	435 x 31 x 38	1.13
GBI434340	1/2"	72	34-340	LCD	digital	644 x 31 x 38	1.43




# ACCESSORIES






## FOR IMPACT WRENCH



**1/2" MA42006M**   
25 € **B**

**1/2" METRIC MINI IMPACT SOCKET SET**  
- 6 PCS

• 13, 17, 19, 21, 22, 24 mm


 0.51 kg



**1/2" MB42011M**   
60 € **B**

**1/2" METRIC IMPACT SOCKET SET**  
- 11 PCS

• 10, 11, 13, 17, 19, 22, 24, 27, 29, 30, 32 mm


 1.87 kg



**1/2" MB42011M1**   
49 € **B**

**1/2" METRIC IMPACT SOCKET SET**  
- 11 PCS

• 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21 mm


 1.29 kg



**1/2" MB43015M**   
113 € **B**

**1/2" METRIC IMPACT SOCKET SET**  
- 15 PCS

• 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32 mm


 4.26 kg



**3/4" MB62010M**   
138 € **B**

**3/4" METRIC IMPACT SOCKET SET**  
- 10 PCS

• 19, 22, 24, 27, 30, 32, 36, 38, 40, 42 mm

 4.90 kg



## FOR 4 IN 1 CORDLESS GARDENING TOOL DGM101



**DGM901**  
65 € **D**

**REMOVABLE TRIMMING HEAD**



**DGM902**  
39 € **D**

**REMOVABLE BRUSH CUTTER HEAD**



**DGM903**  
79 € **D**

**REMOVABLE HEDGE-TRIMMING HEAD**



**DGM904**  
54 € **D**

**REMOVABLE EDGE-TRIMMING HEAD**

## WET/DRY BLOWER VACUUM CLEANER DDWV104KIT



**DDWV900F**  
17,50 € **B**

**HEPA FILTER**



**DDWV902**  
13,50 € **B**

**BIG BRUSH + 3 PLASTIC TUBES**



**DDWV903**  
2,50 € **B**

**NOZZLE**



**DDWV904**  
6 € **B**

**SOFT TUBE**

## FOR DRILLS



### QE HSS2510

11,80 € B

288 g

#### DRILL BIT SET - 10 PCS.

- 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 4.5, 5, 5.5 mm

Manufactured from high hardness HSS for easier and faster drilling.



### QE HSS3

102 € B

#### FLUTE HSS STEP DRILL SET - 3 PCS.

- 4-12, 4-20, 4-30 mm

The 3 flutes guarantee a clean and vibration-free cut. Ideal for soft materials such as plastics or light alloys. Cutting forces distributed over 3 edges, allowing a greater advance. The chamfer facilitates removal in the case of through holes.



1.2 kg




### QE HSS11325

50,40 € B

#### MECHANIC TWIST DRILL SET - 25 PCS

- 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13 mm

High-performance drill made from heavy-duty steel. Less breakage than ground drill. Suitable for on site work, use with a cordless drill driver. Application areas: steel, aluminium, plastics, brass, bronze, cast iron.



1.2 kg




### QE HSSC25

126,60 € B

#### HSS-E 5% COBALT DRILL BIT SET - 25 PCS

- 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13 mm

High performance helical drill bit made of 5% cobalt steel. Cobalt provides solidity, resistance and improves drill bit's hardness. Excellent resistance to high temperatures. Best suited for drilling stainless steel and other tough materials up to 1100 N/mm². Suited for : tough and processed steel, aluminium, plastics, copper, bronze, cast-iron.



## FOR ROTARY HAMMER

### DRH7516

67 € B



780 g

#### SDS-PLUS HAMMER DRILL BITS SET - 7 PIECES

- Ø 5, 6, 8 x 110 mm
- Ø 6, 8, 10, 12 x 160 mm

Ø 5, 6, 8 x 110 mm and Ø 6, 8, 10, 12 x 160 mm SDS-plus bits for drilling tools. Longer service life in concrete and reinforcement thanks to the stabilised head geometry and rounded cutting edges. Patented double-edge cutting design according to the bionic principle. Innovative Twinmax 3D spiral profile provides the ideal removal of drill dust.



## FOR STRAIGHT DIE GRINDERS



3 mm

### QB9211

5,40 € B

#### GRINDSTONES FOR DIE GRINDER

- Grindstones on a 3 mm stem:  
W145, W153, W163, W170, W176



6 mm

### QB9213

8,50 € B

#### GRINDSTONES FOR DIE GRINDER

- Grindstones on a 6 mm stem:  
W220, W187, A22, A12, A5



6 mm

### QB92005

132 € B

#### TUNGSTEN CARBIDE ROTARY BURRS TC SET - 5 PIECES

Cylindrical shaft: Ø 6 mm.  
Burr: Ø 10 mm.



## FOR SHEARS AND SAWS



**90 mm**

**SAW BLADES - 10 PCS**

HSS blade

24 TPI

**QD924**

17 €

B

32 TPI

**QD932**

17,40 €

B



**225 mm**

**QD9209**

29 €

B

**VARIABLE PITCH SABER SAW BLADES - 5 PCS**

Teeth per inch : 10/14 TPI . Blades design to cut steel, metal and wood. Cutting capacity for wood with nails, plywood, plastic tube, carbon: from 3.2 mm to 6.35 mm. Cutting capacity for other materials (excluding metal): from 3.2 mm to 12.7 mm.

**JIGSAW BLADE - 2 PCS**




10 TPI. For wood.

**DJS901P**

2,90 €

B



21 TPI. For metal.

**DJS902P**

4,20 €

B

## FOR ANGLE GRINDERS



Inclined shape

**125 mm (5")**

**10 ZIRCON FLAP DISCS**

Bore: 22,23 mm

Grain 40

**DGD202610P**

48 €

B

Grain 60

**DGD202618P**

48 €

B

Grain 80

**DGD202626P**

48 €

B



**125 mm (5")**

**QB905**

3,70 €

B

**1 GRINDING DISC**

Bore: 22 mm

Thickness: 6 mm

167 g



LIMITED QUANTITY!

**180 mm (7")**

**QB907**

2,30 €

B

**1 GRINDING DISC**

Bore: 22 mm

Thickness: 6 mm

344 g

## FOR ANGLE GRINDERS



Softly inclined shape

**125 mm (5")**

**DGD200451P**

128 €

B

**25 GRINDING DISC**

Bore: 22,23 mm

Thickness: 7 mm



Flat shape

**125 mm (5")**

**DGD210229P**

105 €

B

**25 EXTRA-THIN CUTTING DISCS**

Bore: 22,23 mm

Thickness: 1.0 mm



**75 mm (3")**

**QB913**

2,20 €

B

**CUT-OFF WHEEL**

Bore: 10 mm

Thickness: 1.5 mm

10 g



**100 mm (4")**

**QB914**

3,70 €

B

**CUT-OFF WHEEL**

Bore: 22 mm

Thickness: 6 mm

36 g

## FOR CORDLESS OSCILLATING MULTI-TOOL



**QK131K3**

12,50 € B


1 BI-METAL BLADE



**QK131K4**

11,50 € B


1 SHOVEL BLADE



**QK131K5**

14,10 € B

1 SANDING PAD



**QB9933V06K**

8,60 € B


10 SANDING PAPER #60



**QK131K6**

34,40 € B

1 SEMICIRCLE HSS BLADE



**QB9933V10K**

8,60 € B

10 SANDING PAPER #100

## FOR BELT SANDERS

10 SANDING BELTS



**QB910606**

For QB325  
6 x 330 mm 60 g

12,70 € B

**QB910608**

For QB325  
6 x 330 mm 80 g

12,20 € B

**QB910610**

For QB325  
6 x 330 mm 100 g

11,90 € B

**QB91106**

For QB325  
10 x 330 mm 60 g

12,70 € B

**QB91108**

For QB311  
10 x 330 mm 80 g

12,20 € B

**QB91110**

For QB311  
10 x 330 mm 100 g

12,60 € B

**QB91206**

For QB325  
20 x 520 mm 60 g

22,90 € B

**QB91208**

For QB312  
20 x 520 mm 80 g

16,20 € B

**QB91210**

For QB312  
20 x 520 mm 100 g

15,70 € B

**QB912006**

For QB325  
20 x 330 mm 60 g

20,70 € B

**QB912008**

For QB325  
20 x 330 mm 80 g

16,20 € B

**QB912010**

For QB325  
20 x 330 mm 100 g

15,30 € B

## FOR HEAT GUN



**DHG901**

15 € B

**HEAT GUN NOZZLES - 3 PCS**

1 reflector nozzle, 1 flat nozzle and  
1 reduction nozzle.

Material : Aluminium.

## FOR SANDERS



**QB9327**

27,40 € B

**SANDING DISC FOR  
Ø152 MM (6") ORBITAL  
SANDER**



15 holes



**QB9403**

9,30 € B

**POLISHER PAD**  
Hard/rough 3" (75mm)  
For QP113



**QB9413**

9,30 € B

**POLISHER PAD**  
Medium 3" (75mm)  
For QP123



**QP215T26**

10,60 € B

**DISCS**  
For QP215



**QB9507**

34 € B

**BUFFING PAD**  
For QP317



**SANDING PAD** Velcro pad (3" - 75mm) For QP113 & QP123



**MALE  
QB9303**

13,10 € B



**FEMALE  
QB9323F**

20,30 € B



## FOR HAMMERS



**SC4101** ● 6,90 € B  
FLAT CHISEL  
For 10 mm round shanks



**SC4201** ● 7,40 € B  
FLAT CHISEL  
For 10.2 mm hex shanks



**SC4202** ● 7,40 € B  
SHEET METAL CUTTER  
For 10.2 mm hex shanks



**SC4203** ● 7,40 € B  
PUNCH CHISEL  
For 10.2 mm hex shanks



**SC4204** ● 7,40 € B  
SPOT WELD CHISEL  
For 10.2 mm hex shanks



**SC4205** ● 8,30 € B  
2 EDGE SHEET METAL CUTTER  
For 10.2 mm hex shanks



**SC415MA** ● 34 € B  
SET OF ROUND CHISELS  
For 10 mm round shanks



**SC425** ● 35 € B  
SET OF HEX CHISELS  
For 10.2 mm hex shanks



**SC435** ● 66,70 € B  
SET OF 5 RIVET CHISELS  
For 10 mm round shanks



**SC9501R** ● 32,90 € B  
1/2" HAMMER SOCKET ADAPTOR



**SC9502R** ● 30,70 € B  
AIR IMPACT CHISEL MADE FOR STEERING TIE-RODS



**SC9503R** ● 21,50 € B  
FLAT HEAD AIR IMPACT CHISEL



★★ ● **SC0206R**  
CHISEL SET - 6 PCS  
• 6 punch chisels 5,2 to 12,3 mm


53 € B



**SC33C** ● 53,10 € B  
NEEDLE RUST REMOVER ADAPTER FOR CHISELS  
19 needles Ø 3mm x 180mm.



**SC34C** ● 56,30 € B  
NEEDLE RUST REMOVER ADAPTER FOR CHISELS  
19 needles Ø 3mm x 180mm.

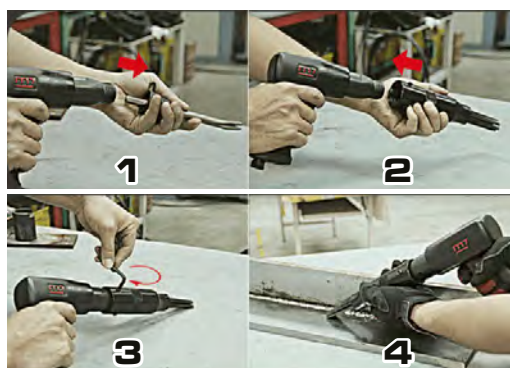

## FOR NEEDLE SCALERS



**SN288** ● 19,80 € B  
SPARE NEEDLES  
For SN1288



**SN268** ● 27,30 € B  
SPARE NEEDLES  
For SN2110 / SC33C / SC34C

NEW



**SN1350T06** ● 13,20 € B  
SPARE NEEDLES  
For SN1350

## FOR PNEUMATIC BLOW GUNS



**JC491** 5,80 € B

### SPARE TIPS

Two side holes for air volume control

**!** Be careful, once the safety tip is set up, it cannot be withdrawn.



**JC116E01**

5,80 € B

**VENTURI NOZZLE**  
FOR JC116 / JC122

**High flow bozzle:**

Maximizes airflow for deep, concentrated cleaning.

NEW



**JC116H01**

10 € B

**SIDE HOLES NOZZLE**  
FOR JC116 / JC122

**Side holes nozzle:**


Creates surrounding airflow for wide-area cleaning.

## FOR OSCILLATING KNIFE



**57mm**  
**QK1057**  
STRAIGHT  
BLADE

19,50 € B



**16.30 x 8mm**  
**QK1008**  
STRAIGHT  
BLADE

19,50 € B



**36mm**  
**QK2036P**  
CURVED  
U-BLADE

31,50 € B



**63mm**  
**QK2063P**  
U-BLADE

34 € B



**90mm**  
**QK2090P**  
U-BLADE

38,40 € B



**48mm**  
**QK2030P**  
CURVED  
BLADE

13,80 € B



**18mm**  
**QK3018**  
U-BLADE

31,10 € B



**36mm**  
**QK3036**  
U-BLADE

35,60 € B

## FOR SCRUBBER



**QB9401**

47,80 € B


HOOKED METAL BRUSH



**QB9411**

32,90 € B

HOOKED METAL BRUSH



**QB9412**

32,20 € B

STRAIGHT METAL BRUSH



**QB9414**

20,20 € B

RUBBER BRUSH



**QB9415**

23 € B

SCOURING WHEEL



## FOR GREASE GUNS



**SG212** 9,30 € B

300 mm FLEXIBLE HOSE



**SG902** 8,70 € B

SCREW-ON TYPE GREASE  
CARTRIDGE ADAPTOR FOR AIR  
GREASE GUN





















Ø18 mm / Ø31 mm  
For SG405 / SG407



## COUPLINGS



















M7 REFERENCE		THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	FOR CONNECTORS	PRICE
STANDARD COUPLINGS						
	<b>SY1213F</b>	<b>R 1/4"</b>		Ø 7.2mm	EURO	10 € B
	<b>SY1233F</b>			Ø 6mm	ISO 6150-B	10 € B
	<b>SY1313F</b>	<b>R 3/8"</b>		Ø 7.2mm	EURO	10 € B
	<b>SY1333F</b>			Ø 6mm	ISO 6150-B	10 € B
	<b>SY1413F</b>	<b>R 1/2"</b>		Ø 7.2mm	EURO	11 € B
	<b>SY1433F</b>			Ø 6mm	ISO 6150-B	11 € B
	<b>SY0213M</b>	<b>R 1/4"</b>		Ø 7.2mm	EURO	10 € B
	<b>SY0233M</b>			Ø 6mm	ISO 6150-B	10 € B
	<b>SY0313M</b>	<b>R 3/8"</b>		Ø 7.2mm	EURO	10 € B
	<b>SY0333M</b>			Ø 6mm	ISO 6150-B	10 € B
	<b>SY0413M</b>	<b>R 1/2"</b>		Ø 7.2mm	EURO	11 € B
	<b>SY0433M</b>			Ø 6mm	ISO 6150-B	11 € B
	<b>SY3213H</b>	Int. Ø for hose <b>8mm</b>		Ø 7.2mm	EURO	10,40 € B
	<b>SY3233H</b>			Ø 6mm	ISO 6150-B	10,30 € B
	<b>SY3313H</b>	Int. Ø for hose <b>10mm</b>		Ø 7.2mm	EURO	11,70 € B
	<b>SY3333H</b>			Ø 6mm	ISO 6150-B	11,70 € B
	<b>SY3413H</b>	Int. Ø for hose <b>13mm</b>		Ø 7.2mm	EURO	12,40 € B
	<b>SY3433H</b>			Ø 6mm	ISO 6150-B	12,40 € B



























M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	FOR CONNECTORS	PRICE	
DECOMPRESSION COUPLINGS			Antistatic. Crush-Resistant. Better performance. Light and compact. High output. No "Whiplash" possible ISO 4414. Anti scratch. Flexible connection.			
	SY271F	G 1/4"	 F	Ø 6mm	ISO 6150-B	23,50 € B
	SY271M	R 1/4"	 M	Ø 6mm	ISO 6150-B	28 € B
	SY372M	R 3/8"	 M	Ø 8mm	ISO 6150-B	33,50 € B
	SY471F	G 1/2"	 F	Ø 8mm	ISO 6150-B	33 € B
DECOMPRESSION COUPLINGS						
	SY200FD	R 1/4"	 F	Ø 6mm	ISO 6150-B	11 € B
	SY300FD	R 3/8"	 F	Ø 6mm	ISO 6150-B	11 € B
	SY400FD	R 1/2"	 F	Ø 6mm	ISO 6150-B	11,80 € B
	SY200MD	R 1/4"	 M	Ø 6mm	ISO 6150-B	11 € B
	SY300MD	R 3/8"	 M	Ø 6mm	ISO 6150-B	11 € B
	SY400MD	R 1/2"	 M	Ø 6mm	ISO 6150-B	11,80 € B




## COUPLINGS


M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	FOR CONNECTORS	PRICE
STANDARD COUPLINGS					
	<b>SY230FD</b>	<b>G 1/4"</b>	 F	Ø 6mm	 7 €
	<b>SY250MD</b>	<b>R 1/4"</b>	 M	Ø 6mm	 9 €
CLAW COUPLING (FIREFIGHTER TYPE)					
Temperature resistance: -5°C ~ +60°C. Max air pressure: 10 bars. Material: brass STANDARD : NFE 29573					
	<b>SYRP4F</b>	<b>G 1/2"</b>	 F	-	11,60€
	<b>SYRP4M</b>	<b>G 1/2"</b>	 M	-	11 €
	<b>SYRP4T</b>	Ø int. for hose <b>13mm</b> to <b>15mm</b>		-	13,40€
REDUCER					
	<b>SY32FM</b>	<b>R 3/8"</b> ▼ <b>G 1/4"</b>	 M  F	-	5,90 €
3/8" Tapped male / 1/4" parallel female Brass and nickel-plated brass Operating pressure: 0 to 15 bar				 A : 17 mm C : 17 mm D : 5,5 mm	
360° ARTICULATED CONNECTORS					
	<b>SY2011M</b>	<b>R 1/4"</b>	 M	-	16 €

## COUPLINGS

	M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	PROFILE	PRICE
CONNECTORS FOR QUICK COUPLINGS						
	<b>SY251F</b>	<b>G 1/4"</b>	 F	Ø 7.4mm	EURO	Pack of 2 9,40 € B
	<b>SY281F</b>	<b>G 1/4"</b>	 F	Ø 6mm	BRITISH	Pack of 2 13,60 € B
	<b>SY261M</b>	<b>R 1/4"</b>	 M	Ø 7.4mm	EURO	Pack of 2 9 € B
	<b>SY281M</b>	<b>R 1/4"</b>	 M	Ø 6mm	BRITISH	Pack of 2 10,50 € B
	<b>SY261F</b>	<b>G 1/4"</b>	 F	Ø 6mm	ISO 6150-B	Pack of 2 9 € B
	<b>SY251MD</b>	<b>R 1/4"</b>	 M	Ø 6mm	ISO 6150-B	Pack of 2 3,50 € B
	<b>SY351MD</b>	<b>13mm 15mm R 3/8"</b>	 M	Ø 6mm	ISO 6150-B	Pack of 2 5,40 € B
	<b>SY351F</b>	<b>G 3/8"</b>	 F	Ø 8mm	ISO 6150-B	Pack of 2 17,60 € B
	<b>SY371M</b>	<b>R 3/8"</b>	 M	Ø 8mm	ISO 6150-B	Pack of 2 32,10 € B
	<b>SY381M</b>	<b>R 3/8"</b>	 M	Ø 6mm	BRITISH	Pack of 2 9,70 € B
	<b>SY461M</b>	<b>R 1/2"</b>	 M	Ø 7.4mm	EURO	13,60 € B
	<b>SY471M</b>	<b>R 1/2"</b>	 M	Ø 8mm	ISO 6150-B	13 € B



**G:** THE LETTER G MEANS THAT THE THREAD OR TAPPING IS CYLINDRICALLY SHAPED.  
G threads are only compatible with G tapping.



**R:** THE LETTER R MEANS THAT THE THREAD OR TAPPING IS CONICAL.  
R threads are compatible with R and G tapping.

**EURO**

**EUROPEAN PROFILE**  
HIGH OUTPUT  
USED ACROSS EUROPE

**ISO  
6150-B**

**ISO 6150-B PROFILE**  
STANDARD OUTPUT  
USED IN BENELUX, SPAIN, FRANCE,  
NORWAY AND SWITZERLAND

**BRITISH**

**BRITISH PROFILE**  
STANDARD OUTPUT  
USED IN THE UK





m7

18V DB-1850P  
LITHIUM-ION  
COMPLETELY CHARGED 20V

m7





catalog.mightyseven.eu

☎ +33 5 49 30 33 27  
🌐 kingtonyeurope.com  
✉ service-clients@kingtony.eu



Offer valid until 31/12/2026. Non-contractual photographs.  
King Tony Europe SAS, capital : €7,350,000,  
company registration numbers: 424 737 138 - FR 26 424 737 138.  
King Tony reserves the right to modify or delete references without prior notice.

