




2 IN 1 AIR VIBRATION INJECTOR PULLER Product Feature

Design to replace the sliding hammer without hand using. Save the power and time to pull out the injector from engine. High torque and two speeds design for pull out the injector quickly.

Technical details:

Piston Stroke	38mm
Stroke Speed (BPM)	300/900
Hose Size	12mm
Spindle Thread	M18X1.5
Weight	2.7kgs
Overall Length	500mm
Max Torque	600Nm
Working pressure	6-9bar (87-130.5 psi or 6-9kg/cm ²)
Max.air pressure	10 bar (140.5psi or 10 kg/cm²)
Air inlet size	1/4"




1/4"Air input




ltem No.	Description
А	Air vibration puller
В	Handle
С	Adaptor (Without handle)
D	Air input switch
E	Hose

Operation Instruction


- 1.Please check the all accessories are complete before using.
- 2.Choose the suitable adaptor (B or C) to connect A. As FIG.1.



3.Put the Handle B into A and connect D &E as FIG.2.



4.Adjust the speed from Figure 1. and open the air switch to operation and pull out the injector.

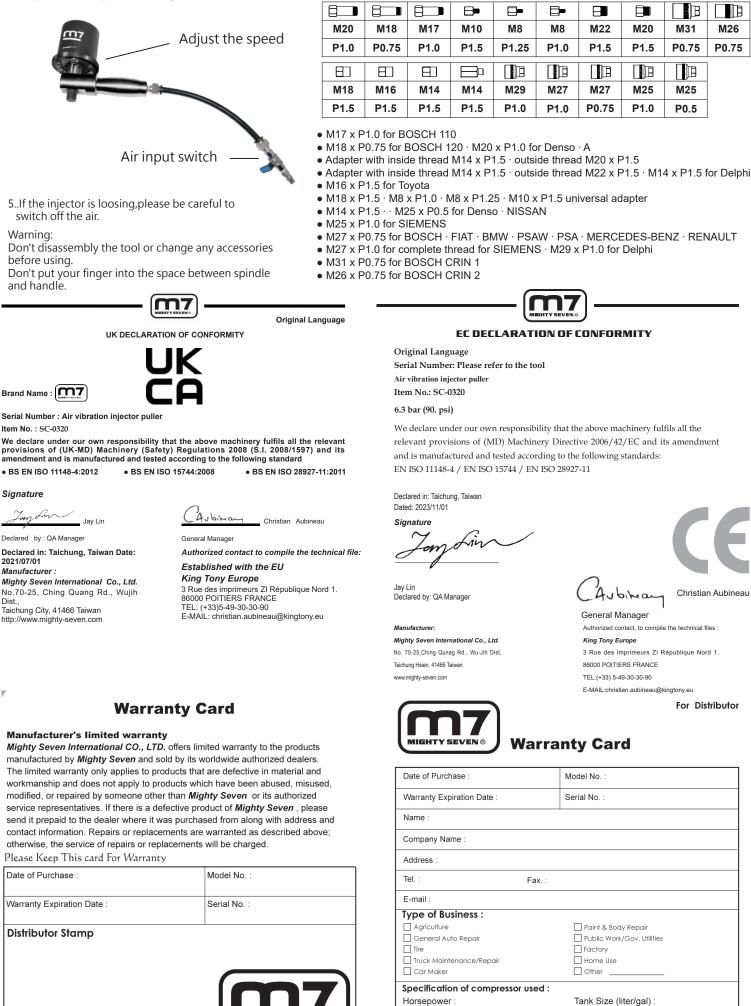

7,5 10 15+

5

other

MIGHTY SEVEN ®

75,7(20) 227,1(60) 302,8(80) 454,2(120)

other _


Adaptor size list for A



Air Vibration Injector Puller Item No : 5C-0320

CE

9

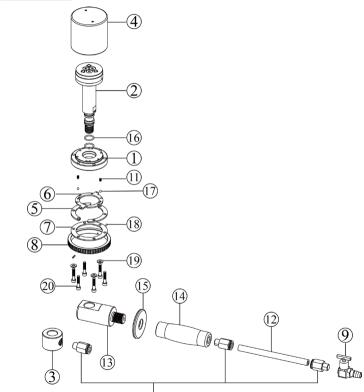

(10)

Part List sc-0320

NO.	INDEX NO.	DESCRIPTION	Q'TY
1	SC-0320P01	Body cap	1
2	SC-0320P02	Piston assembly	1
3	SC-0320P03	Changeable Adaptor	1
4	SC-0320P04	Body	1
5	SC-0320T05	Small disc (2 pcs)	1 SET
6	SC-0320P06	Adjust disc	1
7	SC-0320P07	Bottom disc	1
8	SC-0320P08	Adjust ring	1
9	SC-0320P09	Input valve	1
10	SC-0320T10	Input Adaptor (3 pcs)	1 SET
11	SC-0320T11	Spring (2 pcs)	1 SET
12	SC-0320P12		1
13	SC-0320P13	Front Adaptor	1
14	SC-0320P14	Handle	1
15	SC-0320P15	Plastic disc	1
16		O ring (2 pcs)	1 SET
17		Steel ball (2 pcs)	1 SET
18	SC-0320T18	Hollow pin (2 pcs)	1 SET
19	SC-0320T19	Washer (3 pcs)	1 SET
20	SC-0320T20	Capped hexagon socket head screw (6 pcs)	1 SET