



EN £



2026 CATALOGUE



GUARANTEE

POWERTOOLS
(EXCEPT BATTERIES)

3
YEARS
WARRANTY



START BOOSTERS,
CHARGERS AND
POWERTOOLS BATTERIES

2
YEARS
WARRANTY



WIRED
& PNEUMATIC TOOLS

2
YEARS
WARRANTY



TORQUE WRENCHES
(EXCLUDING CALIBRATION)

2
YEARS
WARRANTY



Consumables are not guaranteed.
The guarantee covers hidden defects and manufacturing faults.
An item is only covered by the guarantee if it has been used correctly and for the purpose for which it was designed.
The guarantee does not cover normal wear and tear caused by intense use or use over time.

m7 POWER

Power Tool packs M7 18V 5Ah.....	6-7
Battery & chargers 18V 5Ah.....	8
Cordless ratchet wrenches 18V 5Ah.....	9
Cordless impact wrenches 18V 5Ah.....	10-11
Cordless impact drivers 18V 5Ah.....	12-13
Cordless impact driver 10.8V 2Ah.....	13
Cordless drill drivers 18V 5Ah.....	14
Cordless reciprocating saw 18V 5Ah.....	15
Cordless jig saw 18V 5Ah.....	16
Cordless circular saw 18V 5Ah.....	16
Cordless oscillating multi-tool 18V 5Ah.....	17
Cordless rotary hammer 18V 5Ah.....	17
Cordless angle grinder 18V 5Ah.....	18
Wired angle grinder 18V 5Ah.....	19
Cordless rivet gun 18V 5Ah.....	19
Cordless heat gun 18V 5Ah.....	20
Wired heat gun 18V 5Ah.....	20
Cordless orbital sander 18V 5Ah.....	21
Cordless grease gun 18V 5Ah.....	21
Cordless LED floodlights 18V 5Ah.....	22
Cordless pressure washer 18V 5Ah.....	23
Cordless vacuum blower 18V 5Ah.....	23
Power Tool Garden packs M7 18V 5Ah.....	24
Cordless leaf-blower 18V 5Ah.....	25
Cordless backpack sprayer 18V 5Ah.....	25
Cordless 4 in 1 gardening tool 18V 5Ah.....	26
Cordless line trimmer 18V 5Ah.....	26
Cordless hedge trimmer 18V 5Ah.....	27
Cordless pruning chainsaw 18V 5Ah.....	27



m7 BOOST

Mini boosters.....	29
Start boosters.....	30-31
Battery chargers.....	32-33
Battery testers.....	34

m7 AIR

Mini pneumatic tools.....	36-37
Pneumatic impact wrenches.....	38-41
Pneumatic ratchets.....	42-43
Pneumatic grinders.....	44
Pneumatic micro die grinders.....	45
Pneumatic angle grinders.....	45
Pneumatic grinders.....	45
Pneumatic sanders and polishers.....	46
Pneumatic belt sanders.....	47
Pneumatic screwdrivers.....	47
Pneumatic drills.....	48
Pneumatic riveters.....	49
Pneumatic needle scalers.....	50
Pneumatic shears and saws.....	50
Pneumatic hammers.....	51
Pneumatic grease guns.....	51
Pneumatic blowguns.....	52

m7 AUTO

m7 GARAGE

Maintenance.....	59
Filter regulators lubricators.....	59
Pneumatic systems.....	60
Cable reels.....	61
Extractors.....	61
Workshop organization.....	62
Torque wrenches.....	63

m7 ACCESSORIES

NEW

M7 POWER



DC201A

£ 93.45 D 08



M7PACKV13

£506.41 D 06



M7PACKV14

£924.71 D 06



M7PACKV15

£1316.31 D 07



M7PACKV16

£622.11 D 07



M7PACKV17

£470.81 D 07



DRW402

£147.74 D 09



DRW402L

£155.75 D 09



DG502K

£112.14 D 22



AG502A

£57.85 D 19

£351.55 D 23



AHG102

£44.50 D 20



DWL101

£123.71 D 22



M7PACKV18

£693.31 D 24



M7PACKV19

£666.61 D 24

M7 BOOST



ST1000

£153.08 B 29



NC4660Q

£239.41 B 38



SN1350

£178 B 50



JC116LD

£38.72 B 52



JC122LD

£44.50 B 52

M7 GARAGE



SV2360

£91.67 B 59



SN1350T06

£11.75 B 69



JC116E01

£5.16 B 70



JC116H01

£8.90 B 70

M7 ACCESSORIES



POWER



Motor

BRUSHLESS

- No friction between the carbon brushes and the manifold (no more sparks at the engine outlet).
- Reduces the heat produced increasing the motor's lifespan.
- No friction to preserve the energy produced by the engine.
- Longer battery life.
- Less wear parts.



THE PACKS **m7**

5Ah / 18V

M7PACKV1

1/2" AND 3/4"

£800.11 **D**

POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH AND 3/4" IMPACT WRENCH

- 1 1/2" compact impact wrench (DW401)
- 1 3/4" compact impact wrench + 1 case + 2 batteries + 1 charger (DW601A)



5Ah / 18V

M7PACKV10

1/2"

£792.10 **D**

POWER TOOL PACK WITH 1/2" IMPACT WRENCH, DRILL DRIVER AND ANGLE GRINDER

- 1 1/2" impact wrench + 1 case (DW406K)
- 1 drill driver (DD101)
- 1 angle grinder (DG501)
- 1 pack: 2 batteries + 1 charger (DC18DB50P2)



NEW

5Ah / 18V

M7PACKV13

1/2"

£506.41 **D**

POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH AND ANGLE GRINDER

- 1 1/2" compact impact wrench + 1 case + 2 batteries + 1 charger (DW401A)
- 1 angle grinder + 1 case (DG502K)



NEW

5Ah / 18V

M7PACKV14

1/2" AND 3/4"

£924.71 **D**

POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH, 3/4" IMPACT WRENCH AND ANGLE GRINDER

- 1 1/2" compact impact wrench (DW401)
- 1 3/4" impact wrench + 1 case + 2 batteries + 1 charger (DW601A)
- 1 angle grinder + 1 case (DG502K)



NEW

**5Ah / 18V
M7PACKV11**

1/2"

£995.91

D

POWER TOOL PACK WITH 1/2" IMPACT WRENCH, DRILL DRIVER, ANGLE GRINDER AND GREASE GUN

- 1 1/2" impact wrench + 1 case (DW406K)
- 1 drill driver (DD101)
- 1 angle grinder (DG501)
- 1 cordless grease gun + 1 case (DGG102K)
- 1 pack: 2 batteries + 1 charger (DC18DB50P2)



**5Ah / 18V
M7PACKV15**

1/2"

£1,316.31

D

POWER TOOL PACK

- 1 hammer drill driver (DH101)
- 1 impact Driver + 1 case (DS203K)
- 1 reciprocating saw (DRS102)
- 1 circular saw (DCS101)
- 1 angle grinder (DG501)
- 1 LED floodlight (DWL102)
- 1 chargeur (DC1840A)
- 3 batteries (3x DB1850P)



NEW

**5Ah / 18V
M7PACKV16**

1/2"

£622.11

D

POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH, HAMMER DRILL DRIVER AND ANGLE GRINDER

- 1 1/2" compact impact wrench + 1 case (DW404K)
- 1 hammer drill driver + 1 case + 2 batteries + 1 charger (DH101A)
- 1 angle grinder + 1 case (DG502K)



NEW

**5Ah / 18V
M7PACKV17**

1/2"

£470.81

D

POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH AND ANGLE GRINDER

- 1 1/2" compact impact wrench + 1 case + 2 batteries + 1 charger (DW404A)
- 1 angle grinder + 1 case (DG502K)



**ELECTROPORTABLE
EFFICIENCY
AT YOUR SERVICE**

**18 V
5 Ah**



LITHIUM-ION BATTERY CELLS

- + Charging faster than a standard battery.
- + No memory effect
- + Longer lifespan.
- + No power loss.
- + Lighter.



**QUICK CHARGING TIME
50 MINUTES**

A fully discharged battery will fully charge in 50 minutes at an ambient temperature between 0 °C and 40 °C.

**BATTERY CHARGE
LEVEL LED
INDICATOR**

NEW



**18 V - 5Ah
DB1850P
BATTERY**

£103.24 **D**



**DC1840A
SMART CHARGER**
Compatible with DB1850P

£67.64 **D**



**DC201A
2-PORT 18V FAST CHARGER**

Two independent charging slots allow two batteries to be charged simultaneously. Smart Current Control. Twin Vortex Active Cooling. Five-Layer Safety Protection.

£93.45 **D**

**DC18DB50P2
PACK WITH 18V BATTERY
CHARGER AND TWO
18V 5 AH BATTERIES**

£248.31 **D**




DC1840A

+



2x DB1850P



CORDLESS RATCHET WRENCHES 18V 5AH



1/2" 180 Nm

CORDLESS RATCHET WRENCH

Long battery life

up to 1000 cycles on a M16 nut with a single charge of 5.0 Ah.

High torque,
instant power
180 Nm in less than a
second.

3 speeds
150 / 200 / 300 rpm.

NEW



DRW402

£147.74

D

Without charger nor battery.



1/2" 180 Nm

EXTENDED CORDLESS RATCHET WRENCH

Long battery life

up to 1000 cycles on a M16 nut with a single charge of 5.0 Ah.

High torque,
instant power
180 Nm in less than a
second.

3 speeds
150 / 200 / 300 rpm.

NEW



484 mm

Slim body 484 mm long for
tight places.

DRW402L

£155.75

D

Without charger nor battery.



	Battery power	Square drive	Bolt size	Torque range	Max. Torque	Free speed	Length	Loosening battery life	Weight
	Ah - V	Inch	mm	Nm	Nm	R.P.M	mm	minutes	kg
DRW402	5 Ah - 18 V	1/2"	M5-M12	100 / 140 / 180	180	0-150 / 0-200 / 0-300 (min-1)	384	50	1.3
DRW402L	5 Ah - 18 V	1/2"	M5-M12	100 / 140 / 180	180	0-150 / 0-200 / 0-300 (min-1)	484	50	1.5





1/2" **M6-M16**
813 Nm

CORDLESS COMPACT IMPACT WRENCH



3 speeds
clockwise rotation



3 auto-stop modes
to limit the tightening torque.



Electric brake
Instant stop when the trigger is released.



Motor
BRUSHLESS



DW401 £159.31 **D**

Without charger nor battery.



DW401

DW401A £398.72 **D**



+ DW401 + 2x DB1850P + DC1840A

1/2" **M6-M16**
900 Nm

CORDLESS COMPACT IMPACT WRENCH



Smart stop function*
when loosening



4 speeds
clockwise rotation



Electric brake
Instant stop when the trigger is released.



Motor
BRUSHLESS



DW404K £122.82 **D**

Without charger nor battery.



DW404

DW404A £362.23 **D**



+ DW404 + 2x DB1850P + DC1840A

Battery power	Square drive	Bolt size	Max. Torque	Free speed	Blows frequency	Tightening battery life	Loosening battery life	Weight	
Ah - V	Inch	mm	Nm	R.P.M	Blows per minutes	minutes	minutes	kg	
					bpm				
DW401	5 Ah - 18 V	1/2"	M6-M16	813	0-1100 / 0-1600 / 0-2200	0-1500 / 0-2500 / 0-3000	83	71	1.48
DW404K	5 Ah - 18 V	1/2"	M6-M16	900	0-900 / 0-1400 / 0-1800 / 0-2200	0-1150 / 0-1700 / 0-2300 / 0-2500	100	100	1.16

* Loose-stop function: once the bolt/nut is loosened, the speed slows down and the rotation stops after about one second, to prevent the bolt from falling.



CORDLESS IMPACT WRENCHES 18V 5AH



1/2" **M10-M25**
1600 Nm

CORDLESS IMPACT WRENCH

- Smart stop function***
when loosening
- 3 speeds**
clockwise rotation
- Electric brake**
Instant stop when the trigger is released.
- Motor BRUSHLESS**



DW406K £248.31 **D**

Without charger nor battery.



DW406A £487.72 **D**



3/4" **M10-M27**
1900 Nm

CORDLESS IMPACT WRENCH

- Reduced vibrations**
The Motor part is connected to the handle by anti-vibration silent blocks.
- 3 speeds**
clockwise rotation
- Electric brake**
Instant stop when the trigger is released.
- Motor BRUSHLESS**



DW601 £445 **D**

Without charger nor battery.



DW601A £684.41 **D**



	Battery power	Square drive	Bolt size	Max. Torque	Free speed	Blows frequency	Tightening battery life	Loosening battery life	Weight
	Ah - V	Inch	mm	Nm	R.P.M	Blows per minutes	minutes	minutes	kg
DW406K	5 Ah - 18 V	1/2"	M10-M25	1600	0-1400 / 0-1900 / 0-2400	0-1800 / 0-2200 / 0-2800	57	57	2.00
DW601	5 Ah - 18 V	3/4"	M10-M27	1900	0-900 / 0-1000 / 0-1800	0-1800 / 0-2000 / 0-2200	46	44	3.37

* Loose-stop function: once the bolt/nut is loosened, the speed slows down and the rotation stops after about one second, to prevent the bolt from falling.

Recommended Retail Price in pounds excl. VAT. Non-contractual photographs. Offer valid from 01/01/2026 to 31/12/2026.

1/4" M2-M12
203 Nm

CORDLESS IMPACT DRIVER

- LED** Circular LED strips at the tip for better visibility of the work area.
- SPEED MODE** 3 speeds clockwise rotation
- AUTO STOP** 3 auto-stop modes to limit the tightening torque.
- ELECTRIC BRAKE** Instant stop when the trigger is released.
- Motor BRUSHLESS**



DS201 £123.71 D

Without charger nor battery.



DS201

DS201A £363.12 D



1/4" M5-M12
270 Nm

CORDLESS IMPACT DRIVER

- SCENES** 4 functions:
 - For wood
 - For thin iron sheet
 - For thick iron sheet
 - Smart stop function*
- LOOSE STOP** Smart stop function* when loosening
- Motor BRUSHLESS**



DS202K £152.19 D

Without charger nor battery.



DS202

DS202A £391.60 D



	Battery power	Max. Torque	Chuck diameter	Bolt size	Blows frequency	Length	Free speed	Battery life	Weight
	Ah - V	Nm	Inch	mm	Blows per minutes	mm	R.P.M	minutes	kg
					bpm		N ₀		kg
DS201	5 Ah - 18 V	203	1/4"	M2-M12	0 - 1200 0 - 2350 0 - 3300	147	0 - 1100 0 - 1900 0 - 2800	60	1.28
DS202K	5 Ah - 18 V	270	1/4"	M5-M12	0 - 1400 0 - 1800 0 - 3500 0 - 4000	110	0 - 1200 0 - 1900 0 - 2500 0 - 3200	68	1.0

*Loose-stop function: once the screw or bolt or nut is loosened, the speed slows down and the rotation stops after about one second, to prevent it from falling.

1/4" 1/2" M5-M12
270 Nm
583 Nm

CORDLESS 1/4" IMPACT DRIVER / 1/2" IMPACT WRENCH

- LED** Circular LED strips at the tip for better visibility of the work area.
- SPEED MODE** **4** speeds clockwise rotation
- SCENES** **4 functions:**
 - For wood
 - For thin iron sheet
 - For thick iron sheet
 - Smart stop function*
- LOOSE STOP** **Smart stop function*** when loosening
- ELECTRIC BRAKE** Instant stop when the trigger is released.
- Motor BRUSHLESS**



DS203K £146.85 **D**
 Without charger nor battery.

DS203A £386.26 **D**

+ DS203 + 2x DB1850P + DC1840A

	Battery power	Chuck diameter	Max. torque unscrewing	Screwing torque	Square drive	Max. loosening torque	Tightening torque	Bolt size	Blows frequency	Length	Free speed	Weight
	Ah - V	Inch	Nm	Nm	Inch	Nm	Nm	mm	Blows per minutes	mm	R.P.M	kg
									bpm			
DS203K	5 Ah - 18 V	1/4"	270	68 108 203 271	1/2"	583	190 244 380 542	M5 - M12	0-1400 0-1800 0-3500 0-4000	125	0-1200 0-1900 0-2500 0-3200	1.0

CORDLESS IMPACT DRIVER 10.8V 2AH

2Ah
10.8/12V



1/4" M4-M12
2Ah / 100 Nm
DS10202
 £169.99 **D**
CORDLESS IMPACT DRIVER
 Quick charge takes 30 minutes.
 2 batteries + 1 charger included.



2Ah DB1020
10.8V/20V, 2AH BATTERY
 Suitable for DS10202
 £50.73 **D**



DC10A
BATTERY CHARGER
 For Battery DB1020
 £36.49 **D**

	Battery power	Chuck size	Bolt size	Max. Torque	Free speed	Blows frequency	Battery life	Weight
	Ah - V	Inch	mm	Nm	R.P.M	Blows per minutes	minutes	kg
						bpm		
DS10202	2Ah - 10.8V	1/4"	M4 - M12	100	0 - 2200	0 - 3000	103	1.0



90 Nm
CORDLESS DRILL DRIVER

Impulse function ideal for drilling on a painted surface and to replace damaged screws.

23 + 1
release positions drilling position

SPEED MODE **2** speeds

Metal chuck, self-tightening and self-locking.

Motor **BRUSHLESS**



Removable bit holder and belt hook.
1 side handle.

DD101 £159.31 **D**

Without charger nor battery.



DD101

DD101A £398.72 **D**



+ DD101 + 2x DB1850P + DC1840A

90 Nm
CORDLESS HAMMER DRILL DRIVER

3 modes: Screwdriver / Drill / Hammer drill.

HAMMER DRILL

Impulse function ideal for drilling on a painted surface and to replace damaged screws.

24 + 1
release positions

SPEED MODE **2** speeds

Metal chuck, self-tightening and self-locking.

Motor **BRUSHLESS**



Removable bit holder and belt hook.
1 side handle.

DH101 £163.76 **D**

Without charger nor battery.



DH101

DH101A £403.17 **D**



+ DH101 + 2x DB1850P + DC1840A

	Battery power	Drilling capacity	Chuck diameter	Blows frequency	Tightening control	Max. Torque	Free speed	Battery life	Weight
	Ah - V	mm	mm	Blows per minutes		Nm	R.P.M	minutes	kg
				bpm					
DD101	5 Ah - 18 V	Wood: 50 Metal: 13	13	-	23+1	90	0 - 500 0 - 2000	51	1.37
DH101	5 Ah - 18 V	Wood: 60 Metal: 13	13	0 - 8000 0 - 32000	25	90	0 - 500 0 - 2000	51	1.45



CORDLESS RECIPROCATING SAW

Bevel Gear Drive System.
Tool-less Blade Change.
Variable-Speed Trigger Switch.
Adjustable shoe length and inclination.
Selector Lever: straight cutting action / orbital cutting action.
This reciprocating saw has the option of orbit action to make the blade swing slightly as it cuts, for a maximum cutting efficiency.



Electric brake
quickly stops the blade rotation when the trigger is released.



Motor
BRUSHLESS

DRS101

£212.71

D



DRS101

Without charger nor battery.

Consumables not available



CORDLESS COMPACT RECIPROCATING SAW

Safety locking button.
Tool-less Blade Change.



Electric brake
quickly stops the blade rotation when the trigger is released.



Motor
BRUSHLESS

THE PERKS :

- 1 HAND WORK
- COMPACT : 336MM (W/O BATTERY)
- LIGHT : 1,78KG

DRS102

£159.31

D



DRS102

Without charger nor battery.

DRS102A

£398.72

D



+

DRS102

+



+



DC1840A


Consumables not available

	Battery power	Cutting capacities	Stroke length	Strokes per minute	Length	Battery life	Weight
	Ah - V	mm	mm	S.P.M	mm	minutes	kg
DRS101	5 Ah - 18 V	Wood: 200 Metal: 16	29	3100	410	31	2.7
DRS102	5 Ah - 18 V	Wood: 160 Metal: 16	25	3100	336	40	1.78

CORDLESS JIG SAW

Speed variator trigger for precise speed control.
 Compatible with "T" and "U" shank Jigsaw blades (not included).
 Adjustable base beveling from 0 - 45 degrees (left/right).
 4-Position orbital action for smooth cutting in a variety of materials.
 Ideal for sawing wood, aluminum and steel.
 Storage of the blades in the base of the saw.

226 x 209 x 75 mm



ELECTRIC BRAKE
 quickly stops the blade rotation when the trigger is released.

Cutting angle until 45°

DJS101 £148.63 **D**

Without charger nor battery.



DJS101

DJS101AB £388.04 **D**



Consumables not available

	Battery power Ah - V	Cutting Capacity mm	Stroke length mm	Strokes per minute S.P.M	Length mm	Battery life minutes	Weight kg
DJS101	5 Ah - 18 V	Wood : 63.5 Aluminium : 9.53 Steel : 6.35	25.4	2200	226	62	2.7

CORDLESS CIRCULAR SAW

Heavy duty, light and durable aluminum base.
 Ergonomic design with soft grip handles for comfort and control.

ELECTRIC BRAKE
 quickly stops the blade rotation when the trigger is released.

185 MM

Motor BRUSHLESS

Cutting angle 45° or 90°

DCS101 £266.11 **D**

Without charger nor battery.



DCS101

DCS101AB £505.52 **D**



Consumables not available

	Battery power Ah - V	Free speed RPM	Shank Opening mm	Spindle size mm	Cutting Capacity 45° mm	Cutting Capacity 90° mm	Bevel Capacity degrees	Stroke length mm	Length mm	Battery life minutes	Weight kg
DCS101	5 Ah - 18 V	4500	185	16	46	60.5	0 - 56	25.4	340	50	3.63

CORDLESS OSCILLATING MULTI-TOOL & CORDLESS ROTARY HAMMER 18V 5AH

CORDLESS OSCILLATING MULTI-TOOL

The oscillating multi-tool is offering a large versatility for the following uses :


- Ideal for the sawing and the cutting of wood, steel, plastic or plasterboard.
- Useful for scraping silicone, tile joints, paint or adhesive.
- Suitable for sanding narrow spaces such corners.

Anti-Vibration System for a more comfortable work.
Fast blade replacement without tool.
Oscillation angle : 1.8° right & left.



DOM101 £184.23 **D**

Without charger nor battery.



DOM101A1 £357.78 **D**

Includes:

- DOM101
- DB1850P
- DC1840A
- QK131K4
- QK131K3
- QK131K5
- QK131K6
- #60
- #120
- #180

	Battery power	Strokes per minute	Oscillation angle	Length (without battery)	Sound level	Vibration level	Battery life	Weight
	Ah - V	S.P.M	degrees	mm	dBA	m/s ²	minutes	kg
DOM101	5 Ah - 18 V	11000/18000	1.8	320	80.6	1.9	81	1.04


CORDLESS ROTARY HAMMER

3 Modes : Drill, Drill + Hammer & Chisel.
Perfect choice for drilling and chiseling concrete, wood or steel.
SDS plus Quick-Change Chuck.
Automatic stop of the rotation when you release the trigger.
1 side handle.



DRH101K £169.99 **D**

Without charger nor battery.



DRH101A £409.40 **D**

Includes:

- DRH101
- 2x DB1850P
- DC1840A

Consumables not available

	Battery power	Free speed	Blows frequency	Impact Energy	Drilling capacity	Sound level	Vibration level	Battery life	Weight
	Ah - V	R.P.M	Blows per minutes	joules	mm	dBA	m/s ²	minutes	kg
DRH101K	5 Ah - 18 V	1150	5100	2.6	Wood: 30 Steel: 13 Concrete: 26	94.3	12.7	Drill: 40 Drill + Hammer: 19	2.4



Ø 125 mm CORDLESS ANGLE GRINDER



DG501 £168.21 **D**

Without charger nor battery.

DG501

DG501A £407.62 **D**

+ DG501 + 2x DB1850P + DC1840A

Consumables not available

Ø 125 mm CORDLESS ANGLE GRINDER



DG502K £112.14 **D**

Without charger nor battery.

+ DG502

DG502A £351.55 **D**

+ DG502 + 2x DB1850P + DC1840A

Consumables not available

	Battery power	Disc diameter	Thread	Power	Horsepower	Free speed	Length	Autonomie	Weight
	Ah - V	mm	mm	W	hp	R.P.M	mm	minutes	kg
				W	hp				
DG501	5 Ah - 18 V	125 (5")	M14 x P2.0	900	-	3500 - 8000	285	36	1.48
DG502	5 Ah - 18 V	125 (5")	M14 x P2.0	-	1.2	4000 / 6000 / 8500	320	25 (at 8600 rpm)	1.6

Ø125 mm

WIRED ANGLE GRINDER

Ideal for cutting, grinding, and deburring work on steel, cast iron, stainless steel, aluminum, etc.

Ergonomic design for a perfect grip.

2-meter power cable for full working freedom.

NEW

Spindle lock button for easy disc changes.

2-position on/off switch (continuous operation or "dead man" switch).

2 positions handle.



Restart prevention

If a power outage occurs and the switch remains on, the machine will not automatically restart when power is restored.

AG502A

Wired.



£57.85

D

Consumables not available.

	Voltage	Disc diameter	Thread	Power	Free speed	Cable length	Length	Weight
	Ah - V	mm	mm	W	R.P.M	M	mm	kg
AG502	220-240V	125	M14	850	11000	2	285	2.0

CORDLESS RIVET GUN 18V 5AH



CORDLESS RIVET GUN

Supplied with O-ring to hold the rivet.
 Nozzles included : 2.4mm, 3.2mm, 4.0mm, 4.8mm, 6.4mm.
 Compatible with aluminium, steel, stainless rivets from 2,4 mm to 6,4 mm.
 Battery Life : 1 full charge battery for 100 rivets.



DR102K

£501.07

D

Without charger nor battery.



DR102

DR102A1

£674.62

D



+

DR102

+

DB1850P

+

DC1840A

Consumables not available

MATERIAL		RIVET DIAMETER (ØMM)					
RIVET	MANDRIN	(2.5)	(3.0)	4.0	(5.0)	6.4	8.0
aluminum	aluminum	2.4	3.2		4.8		
aluminum	steel						
steel	steel						
stainless	steel						
stainless	stainless						

	Battery power	Capacity	Traction	Stroke length	Battery life	Weight
	Ah - V	mm	kg-f	mm	minutes	kg
DR102K	5 Ah - 18 V	2,4 - 6,4	2040	27	75	0.63

CORDLESS HEAT GUN

60 seconds up to max. temperature.
 Stable temperature (overheat prevention).
 Quick release collar to safely and easily remove nozzle accessories.
 Lock-off feature prevents accidental start up ensuring safety to the user.
 Including 3 nozzles (reflector nozzle, flat nozzle and reduction nozzle) .
 Application: Shrinking, Bending tube, Removing Stickers and more...



DHG101

£91.67

D



Without charger nor battery.

DHG101

	Battery power	Air Flow	Max. Temperature	Length	Battery life	Weight
	Ah - V	L / min	°C	mm	minutes	kg
DHG101	5 Ah - 18 V	200	550	220	23	0.63

WIRED HEAT GUN

WIRED HEAT GUN

NEW



Powerful Performance
 2000W for fast and efficient heating.

Precise Temperature Control
 LCD digital display with adjustable 60 - 650°C range.

Safe & Ergonomic
 Comfortable grip design with overheating protection.

Adjustable Airflow
 Dual airflow settings (250/500 L/min) for versatile applications.

Muti-Purpose Use
 Comes with 4 nozzles - ideal for paint removal, shrink wrapping, thawing, molding, and more.



AHG102

£44.50

D

Wired.

	Power supply voltage	Frequency	Power consumption	Temperature Range	Air Flow	Weight
	V	Hz	W	°C	L / min	kg
AHG102	230	50	2000	60 (1) / 60 - 650 (2)	250 (1) / 150-500 (2)	0.7



Ø125mm / Ⓞ 3mm

CORDLESS ORBITAL SANDER

Compatible abrasive disc: 8-hole velcro paper Ø 125 mm.
 Speed variator: 6 speeds.
 Dust collection bag.
 The speed trigger allows to adapt the speed to the type of surface or the work that needs to be done.
 Soft start function.
 Ergonomic handle for more confort and control.



SPEED VARIATOR

DOS501

£123.71

D



DOS501

Without charger nor battery.

DOS501AB

£363.12

D



BA80129

DOS501

2x DB1850P

DC1840A

Consumables not available.

	Battery power Ah - V	Disc diameter mm	Free speed R.P.M	Orbit mm	Length mm	Battery life minutes	Weight kg
DOS501	5 Ah - 18 V	125	7000 - 11000	3.0	300	69	1.23

CORDLESS GREASE GUN

Compatible with standard 400g grease cartridge : DIN1284 & Lube-Shuttle.
 Overpressure protection included.
 LCD screen to control battery level.
 Provided with 1 meter flexible hose & 73 cm strap.



DGG102K

£182.45

D

Without charger nor battery.




DGG102

DGG102A1

£356

D



DGG102

DB1850 P

DC1840A

Consumables not available.

	Battery power Ah - V	Length (without battery) mm	Pressure bar	Grease flow ml / min	Cartridge capacity g	Battery life minutes	Weight kg
DGG102K	5 Ah - 18 V	395	482	94,6	400	90	2.4

NEW



6500 lm
CORDLESS LED FLOODLIGHT

DWL101

£123.71

D



DWL101

Without charger nor battery.



	Battery power	Sizes	Brightness	Brightness on AC mains power	Battery life	Weight
	Ah - V	mm	lm	lm	hours	kg
DWL101	5 Ah - 18 V	300 x 252 x 145	1000 / 6500	900 / 3200	6 / 3	2.4



7000 lm
CORDLESS LED FLOODLIGHT

DWL102

£107.69

D



DWL102

Without charger nor battery.

	Battery power	Sizes (without battery)	Brightness	Color temperature	Battery life	Weight
	Ah - V	mm	lm		hours	kg
DWL102	5 Ah - 18 V	180 x 145 x 440	2 000 / 7 000	white / warm	7.5 / 2.5	2.85

CORDLESS PRESSURE WASHER & VACUUM BLOWER 18V 5AH

CORDLESS PRESSURE WASHER



Water gun utilizes a three-piston pump with super silent anti-vibration technology to clean both quietly yet thoroughly.



Metal Pump with no possible leak of water and oil

Dual trigger system with double click power control to operate at low or high power

DPW101

£108.58

D

Without charger nor battery.



Accessories included



1 high precision 4-in-1 multi pattern nozzle (rotating turbo nozzle, 20° fixed nozzle, 60° fixed nozzle, 0° pencil jet)



1 foaming nozzle to apply detergent



1 quick-connect 4M water inlet hose for drawing fresh water from any source (a bucket, a pool, a can, a pond etc.)



2 lances of 28,5 cm each or 57 cm total length

	Compatible battery	Water flow	Max pressure	Length	Hose length	Battery life	Weight
	Ah - V	L / min	bar	mm	M	minutes	kg
DPW101	DB1850P (18 V, 5 Ah)	2.8	25	876	4	High speed: 88 Low speed: 124	1.72

CORDLESS VACUUM BLOWER


Efficiently vacuums up dust and liquids. Blast mode ideal for clearing debris from confined spaces. Automatic shut-off when water reaches maximum capacity to protect the motor.



Features a HEPA filter that is highly effective against dust and easy to replace.

Carrying shoulder strap

3.2-metre telescopic hose



4 rotating wheels



2 power settings :
- low power (100 W) with a suction power of approx. 9 kPa.
- full power (200 W) with a suction power of approx. 16 kPa.



DDWV104KIT

£137.95

D

Without charger nor battery.



	Compatible battery	Suction power	Liquid tank capacity	Dust tank capacity	Battery life	Weight
	V - Ah	kPa	L	L	minutes	kg
DDWV104KIT	DB1850P (18 V, 5 Ah)	9 / 16	8	10	20 / 35	4.1

THE PACKS **m7**[®]

GARDEN

NEW

5Ah / 18V
M7PACKV18

£693.31 **D**

POWER TOOL PACK WITH LINE TRIMMER, HEDGE TRIMMER, LEAF-BLOWER AND PRUNING CHAINSAW

- 1 line trimmer (DST101)
- 1 hedge trimmer (DHT101)
- 1 leaf-blower (DLB102)
- 1 pruning chainsaw (DCCS101)
- 1 fabric tool box (BA80129)
- 2 batteries 18 V, 5 Ah (2x DB1850P)
- 1 charger (DC1840A)



NEW

5Ah / 18V
M7PACKV19

£666.61 **D**

POWER TOOL PACK WITH 4-IN-1 GARDENING TOOL WITH 4 REMOVABLE HEADS AND LEAF-BLOWER

- 1 4-in-1 gardening tool with 4 removable heads (DGM101SET)
- 1 leaf-blower (DLB102)
- 1 fabric tool box (BA80129)
- 2 batteries 18 V, 5 Ah (2x DB1850P)
- 1 charger (DC1840A)



CORDLESS LEAF-BLOWER & BACKPACK SPRAYER 18V 5AH

CORDLESS LEAF-BLOWER

Suitable for lawn maintenance, cleaning up dead leaves, dusting and removing snow. 2 clip-on parts air pipe for easy storage and set-up. Can be hung up vertically for convenient storage.



TURBO SPEED switch for a high power operation.

Ergonomic handle with a comfortable grip for easy work.

Progressive trigger with a locking switch for a continuous operation.

DLB102

£95.23

D

Without charger nor battery.



DLB102

DLB102A

£337.31

D



DLB102



2x DB1850P



DC1840A

Compatible battery	Air speed	No-load speed	Second speed	Air flow	Dimensions	Sound level	Vibration level	Battery life	Weight	
V - Ah	km/h	R.P.M	R.P.M	m ³ /mn	mm	dBA	m/s ²	minutes	kg	
DLB102	DB1850P (18 V, 5 Ah)	162	7 100 - 11 600	14 000	6.5 - 10.7 / 13	816 x 166 x 288	96	0.2	12 / 24	2.6

CORDLESS BACKPACK SPRAYER

Cordless tool allowing for free movement. 12 liter tank. Backpack model for great comfort even on long sessions.



DGS101

£123.71

D

Without charger nor battery.



Accessories include:

- 1 telescopic metal lance (100 cm max)
- 1 plastic lance (58 cm)
- 5 nozzles:



single nozzle

bi-directional front and rear nozzles

swirl nozzle

4-hole nozzle


6-hole nozzle

Compatible battery	Water flow	Max. pressure	Tank capacity	Hose length	Sound level	Vibration level	Weight	
V - Ah	l/min	bar	L	cm	dBA	m/s ²	kg	
DGS101	DB1850P (18 V, 5 Ah)	1.2	4.0 / 5.0	12	124	84.6	< 2.5	3.4

36 V

CORDLESS 4 IN 1 GARDENING TOOL

Designed to cut grass, trim bushes, branches or hedges with the same tool. Operates at 36 V for extended autonomy and higher intensity. Equipped with a strap to support the tool to relieve arms and back.

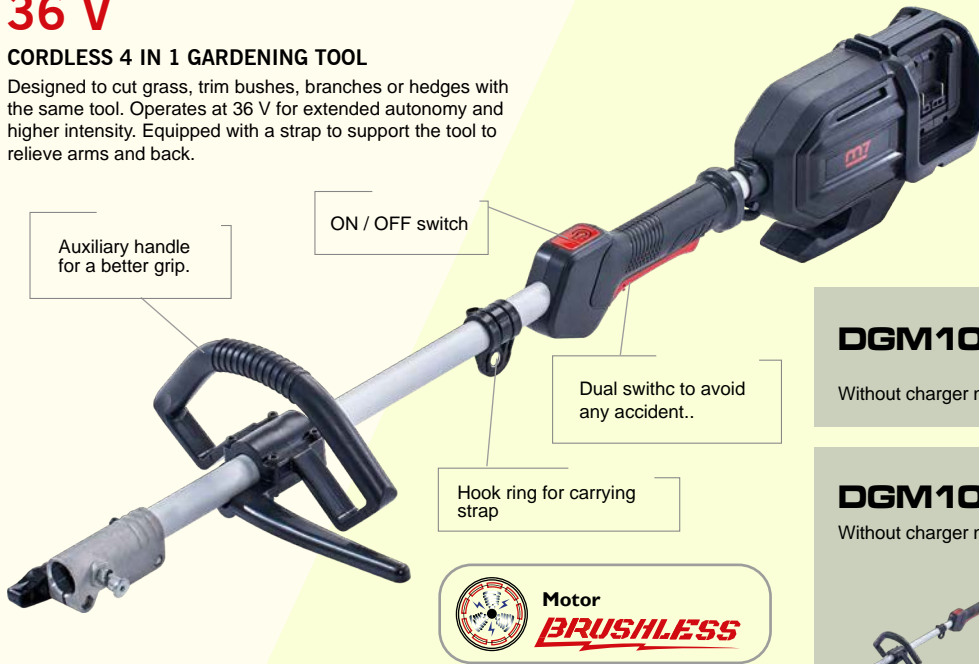

	Compatible battery	No-load speed	Weight
	V - Ah	R.P.M	kg
DGM101	2x DB1850P (2x 18 V, 5 Ah)	7 400	2.92

DGM101

£114.81

D

Without charger nor battery.



DGM101SET

£297.26


D

Without charger nor battery.



CORDLESS LINE TRIMMER

Best suited for garden, driveways and hedges maintenance. Tap and Go : gently tap head to easily remove the thread. Cordless tool allowing for free movement.

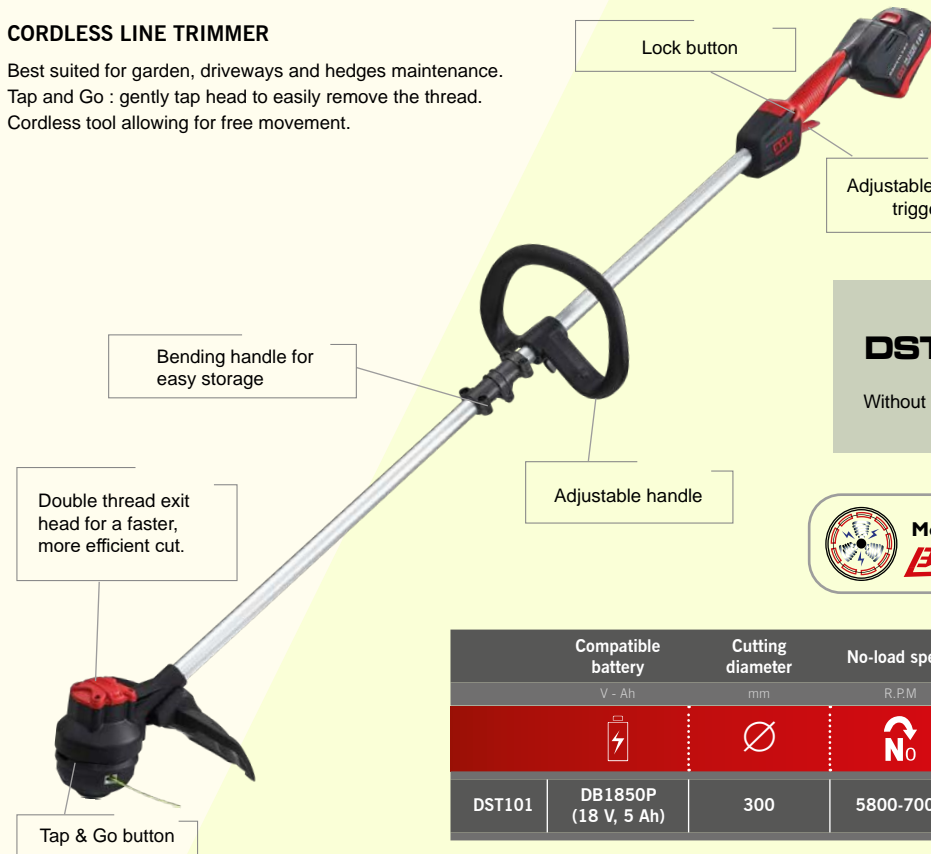

	Compatible battery	Cutting diameter	No-load speed	Length	Autonomy	Weight
	V - Ah	mm	R.P.M	mm	minutes	kg
DST101	DB1850P (18 V, 5 Ah)	300	5800-7000	876	36	2.59

DST101

£140.62

D

Without charger nor battery.



CORDLESS HEDGE TRIMMER & PRUNING CHAINSAW 18V 5AH

CORDLESS HEDGE TRIMMER

Best suited for hedges, bushes and thin branches maintenance.
45° and 90° handle rotation.
Built-in battery protection system automatically shuts down motor power to extend battery life.

Handle rotation release button.

Safety guard

Dual switch safety trigger.

DHT101

£75.65

D

Without charger nor battery.



	Compatible battery	Shear speed	Cutting length	Cutting capacity - branch ø	No-load speed	Blade length	Teeth spacing	Weight
	V - Ah	S.P.M	mm	mm	R.P.M	mm	mm	kg
DHT101	DB1850P (18 V, 5 Ah)	2 800	538	19	1 400	610	26	2.6

CORDLESS PRUNING CHAINSAW

Best suited for cutting branches and pruning trees.
The automatic chain lubrication system creates a smoother efficient cut and extends product lifetime.

Safety trigger with dual switch to avoid unintentional startup

Adjusting SDS chain does not require any tool which is easier to power on and allows for a quicker maintenance and setting.

Chain pitch : 3/8" LP (9,5 mm)
Chain type: E43-FL-40E

Rubber handle to reduce vibration when working.

Oil indicator allows to check oil level without dissembling

DCCS101

£123.71

D

Without charger nor battery.



	Compatible battery	Chain speed	Guide length	Cutting length	Dimensions	Oil tank capacity	Sound level	Battery life	Weight
	V - Ah	m/s	mm	mm	mm	ml	dBA	minutes	kg
DCCS101	DB1850P (18 V, 5 Ah)	9.3	254	200	451 x 255 x 198	120	98	16	2.7





BOOST



m7
12 V
START BOOSTER
🚗 🚙 🚓 🚒
3100 A
PEAK AMPS
1200 A
CARRYING AMPS
573100

NEW

MULTIFUNCTION MINI BOOSTER



Start booster

LED projector

Powerbank

8.0L GASOLINE | **6.0L** DIESEL

PA 2000 A
CA 1200 A

12V - 24Ah £153.08 **B**
ST1000

New mini booster model: even more powerful, in an ultra-practical design.

Minibooster with the capacity to start all kind of gasoline vehicles up to 8 L & diesel up to 6 L.
9 built-in protective functions: protection against short circuits, polarity reversal, reverse charging, low voltage, overvoltages, overcurrents, overheating and excessive discharges.
 Can be charged from the mains or the cigarette lighter.
 2 output ports: USB-A 5V port and DC 12V port.
 1 USB-C input port.

3-mode LED torch:

- continuous
- flashing
- SOS



40 x 50 mm LCD display: displays the battery status and power supply.

Crocodile Clips to start light vehicles (cars, motorcycles, motorhomes, snowmobiles, yachts, etc.).



START BOOSTER AND COMPRESSOR

Start booster

Voltmeter

Compressor

LED projector

Powerbank

PA 2500 A
CA 1500 A

12V £255.43 **D**
STBAT3

Presetting tire pressure.

Compressor start-stop button.

Light 300 lumen



Starting port

Compressor output port.

2x USB-A
1x USB-C



Working temperature: -20°C ~ 50°C
 In-Output USB C: 5 ~ 20V / 3A PD 60W
 2x Output USB A: 5V/3A - 9V/2A - 12V/1.5A

	Battery capacity mAh	Battery capacity Wh	Power supply voltage V	Cranking amps (CA) A	Peak amps (PA) A	Pressure range bar	Starting cable length cm	Charging time hours	Brightness lumen	Dimensions mm	Weight kg
ST1000	24 000	88.8	12	1200	2000	-	-	-	-	230x146x57	1
STBAT3	6 166	74	12	1500	2500	0.7 - 10.3	50	± 1.5	300	251x138x65	1.36



Cable length
40 cm

Cable length
114 cm

12V - 25Ah
ST3100

12V - 25Ah
ST3100L

£379.14 **D**

£398.72 **D**

START BOOSTER

Designed for professional interventions and repairs.
High-performance, pure lead AGM battery.
Colored LEDs indicating the booster's charge level.
Protection against voltage surges.
Integrated safety fuse.
Insulated, brass-made, curved, durable and resistant pliers.
ABS housing, lightweight and impact resistant.

- 1 self-regulating automatic charger (220 V) supplied.
- Number of batteries: 1
- Fuse on the positive clamp: 500A

12/24V - 2x25Ah

ST6200

£826.81 **D**

START BOOSTER

High-performance, pure lead AGM battery.
Designed for professional interventions and repairs.
Perfect to start trucks, agricultural machinery, public works machinery, which require very high starting power in the event of battery failure
Digital voltmeter indicating the booster's charge level.
Protection against voltage surges.
Large insulated, brass-made, durable and resistant pliers.
ABS housing, lightweight and impact resistant.
Integrated safety fuse.
12 V / 24 V / OFF switch.
Reverse polarity alarm.

- 1 self-regulating automatic charger (220 V) supplied
- Number of batteries: 2
- Fuse on the positive clamp: 500A



REVERSE
POLARITY ALARM

DIGITAL
VOLTMETER

12/24V - 2x33Ah

ST6400

£1,271.81 **D**

START BOOSTER

High-performance, pure lead AGM battery.
Designed for professional interventions and repairs.
Perfect to start trucks, agricultural machinery, public works machinery, which require very high starting power in the event of battery failure.
Digital voltmeter indicating the booster's charge level.
Protection against voltage surges.
Large insulated, brass-made, durable and resistant pliers.
ABS housing, lightweight and impact resistant.
Integrated safety fuse.
12 V / 24 V / OFF switch.
Reverse polarity alarm.

- 1 self-regulating automatic charger supplied
- Number of batteries: 2
- Fuse on the positive clamp: 500A



REVERSE
POLARITY ALARM

TELESCOPIC
HANDLE



DIGITAL
VOLTMETER

WHEELS

	Voltage (DC)	Cable length	Clamps length	Cable section	Cranking amps	Peak amps	Dimensions	Weight
	V - Ah	cm	mm	mm ²	A	A	mm	kg
ST3100	12V - 25Ah	40	175	25	1200	3100	260 x 120 x 330	10.93
ST3100L	12V - 25Ah	114	175	25	1200	3100	260 x 120 x 330	11.26
ST6200	12/24V - 2x25Ah	145	200	50	2400 / 1200	6200 / 3100	310 x 210 x 440	23.5
ST6400	12/24V - 2x33Ah	182	150	50	2540 / 1270	6400 / 3200	360 x 160 x 420	39

12V - 22Ah
ST950

£426.31 **D**

START BOOSTER

Solid electrolyte lead-acid battery (AGM), watertight, in compliance with I.A.T.A safety standards.

Built-in short-circuit fuse in the red clamp protects the booster battery and the vehicle.

Extremely supple start cables of optimum length.

Digital rectangular back-lit voltmeter shows the charge level at a glance.

Completely insulated brass clip and super flexible multicore copper cables.

Protection against power surges.

ON/OFF button.

Can be stored and used in all positions.

20A thermal circuit breaker.

- Clip opening: 30mm
- Number of batteries: 1



• Voltmeter on a LCD backlit screen



**SUPER-CAPACITOR
BATTERY-LESS
TECHNOLOGY**

- > Back to back jump starts without stopping !
- > Ideal for breakdown recovery

12V
STC1800

£1,027.95 **D**

**START BOOSTER
WITH A SUPER-CAPACITOR**

Meets IATA safety standards.

Entirely insulated brass clips.

160 cm ultra-supple starter cables, made from multi-strand copper.

Negative polarity indicator.

Built-in short-circuit fuse in the red clamp protects the booster battery and the vehicle.

SUPER-CAPACITOR ADVANTAGES :

The booster recharges automatically in a few seconds, as soon as the vehicle has been jump started.

Does not contain a battery. This eliminates not only the problem of recharging between 2 jump starts but also problems related to low temperatures.

Reliable and durable.
Light.



• Voltmeter on a LCD backlit screen



	Voltage (DC)	Cable length	Clamps length	Cable section	Cranking amps	Peak amps	Dimensions	Weight
	V - Ah	cm	mm	mm ²	A	A	mm	kg
ST950	12V - 22Ah	93	170	25	950	2500	335 x 163 x 415	11.5
STC1800	12V	160	170	25	1800	9000	335 x 163 x 415	9.8



12V - 8A BC1208

£105.02 **D**

BATTERY CHARGER

Electronic, digital, multi-stage charging and maintenance charger.
 Protection against polarity reversal and short circuits.
 Fixing hook.
 Ergonomic Design.
 Charge recovery function.
 13,8V - 5A Power function.

COMPATIBLE WITH

lead-acid battery



lithium battery



Li
Lithium-compatible

Digital backlit display.



12/24V - 7A BC122407

£101.46 **D**

BATTERY CHARGER

The BC122407 Dual Voltage Professional Battery Charger is the ultimate tool for battery charging and maintenance.
 The adaptive charging process not only ensures that batteries are completely charged but also extends their life with its automatic reconditioning mode.
 Keep going in all environments due to the IP65 protection system.

Li
Lithium-compatible

1 - 2 - 3 - 4 - 5 - 6 - 7

Multi-step Micro-processor controlled charging



Automatic maintenance mode



Energy efficient



Extends battery life



Protection against sparks



Dust & Water resistant

Recondition mode

Charge status

Supply mode

Mode selection

Voltage



	Voltage (DC)	Power supply voltage	Frequency	Rated current	Charging and testing stages	Charge capacity	Maintenance capacity	IP degree of protection	Size	Weight
	V - mAh	V	Hz	A		Ah	Ah		mm	Kg
					1 2 3					
BC1204	6 / 12	220 - 240	50 - 60	1 - 4	8	4 - 80	4 - 120	IP65	190 x 80 x 50	0.75
BC1208	12	220 - 240	50 - 60	2 - 8	9	5 - 160	5 - 250	IP65	230 x 100 x 65	1
BC122407	12 / 24	220 - 240	50	7.0	7	14 - 150	14 - 225	IP65	205 x 88 x 51	0.748



12V - 5Ah
STG5

£75.65

D

12V - 10Ah
STG10

£149.52

D

12/24V - 15Ah
STG15

£194.02

D

Li
Lithium-compatible



BATTERY CHARGER

The STG15 is the Ultimate Battery Charging, support and Diagnostic Tool. Combine intelligent charging, maintenance, supply, reconditioning and testing into one simple process with this easy to use Advanced Battery Charger.



Automatic maintenance mode



Energy efficient



Extends battery life



Protection against sparks



Alternator and battery test

COMPATIBLE WITH

lead-acid battery

lithium battery



1-2-3-4-5-6-7

Multi-step Micro-processor controlled charging




	Voltage (DC)	Power supply voltage	Frequency	Rated current	Charging and testing stages	Charge capacity	Maintenance capacity	IP degree of protection	Size	Weight
	V - Ah	V	Hz	Ah		Ah	Ah		mm	Kg
					1 2 3					
STG5	12	220 - 240	50/60	5	7	1.2 - 110	1.2 - 160	IP65	123 x 123 x 46	0.564
STG10	12	220 - 240	50/60	10	7	24 - 200	24 - 250	IP65	185 x 185 x 68	1.3
STG15	12/24	220 - 240	50	15 / 7.5	7	24 - 300	24 - 500	IP20	190 x 190 x 75	1.5

12V
STT3 £112.14 **D**

Li
Lithium-compatible

ADVANCED BATTERY TESTER

The STT3 12V Advanced Battery Tester is capable of diagnosing issues with a vehicle's electrical system by analyzing each component.
Test the Battery, Alternator, Starter motor accurately and reliably in seconds.

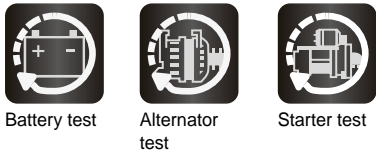

COMPATIBLE WITH

lead-acid battery lithium battery

AGM Flat+Spiral WET Flooded

MF GEL+Ca/Ca EFB START STOP

LiFePo4



Test report via QR code for mobile display of results.




12/24V
STT13 £407.62 **D**

Li
Compatible lithium

BATTERY TESTER WITH INTEGRATED PRINTER

The STT13 12/24V Advanced Battery Tester is capable of diagnosing issues with a vehicle's electrical system by analyzing each component.
Test the Battery, Alternator, Starter motor and Mass ground accurately and reliably in seconds.

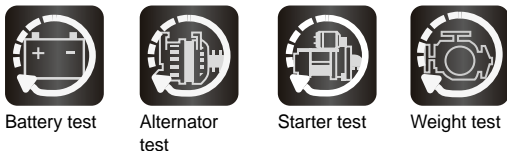

COMPATIBLE WITH

lead-acid battery lithium battery

AGM Flat+Spiral WET Flooded

MF GEL+Ca/Ca EFB START STOP

GEL SPIRAL

LiFePo4



Print the results and scan the QR code to share the test reports.

- Integrated Printer.
- Colour LCD Screen.
- Responsive Touchpad.
- Included SD Card.

Battery capacity	Battery capacity	Power supply voltage	Cranking amps	Peak amps	Pressure range	Starting cable length	Charging time	Brightness	Dimensions	Weight
mAh	Wh	V	A	A	bar	cm	hours	lumen	mm	kg
			⚡		⏏			📦		
STT3			0 - 50			80 X 80 X 22				0.2
STT13			-			101 x 240 x 38				0.693



AIR



Pin Less

Rocking dog

Twin Dog

Twin Hammer

New Twin Hammer

Pin Clutch

Jumbo Hammer

- Quiet model
- Light product
- Light product (magnesium)

5-IN-1 SET



NEO405KIT

£372.91

B

PNEUMATIC TOOL SET - 5 PCS

Quick-head-change system



kg 4,30 kg



81 Nm
NE9004
1/2" AIR RATCHET
WRENCH



2500 R.P.M
QE2132
STRAIGHT DRILL
Ø 10 MM (3/8")



14000 R.P.M
QA9620
90° ANGLE GRINDER
Ø 6 & 3 MM



14000 R.P.M
QB9903
STRAIGHT DIE GRINDER
Ø 75 MM



20000 R.P.M
QA9120
STRAIGHT DIE GRINDER
Ø 6 & 3 MM

	Max. torque	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Sound level	Vibration level	
	Nm	R.P.M	L/min	bar	mm	HP	kg	Inch	dBA	m/s ²	
NE9004	1/2"	81	150	141	6.3	287	-	1.48	1/4"	82	5.2
QE2132	10mm (3/8")	-	2500	141	6.3	248	-	1.1	1/4"	82	1.5
QA9120	6 & 3mm	-	20 000	141	6.3	202	0.5	0.73	1/4"	82	3.5
QB9903	75mm (3")	-	14 000	141	6.3	211	0.5	0.9	1/4"	82	3.5
QA9620	6 & 3mm	-	14 000	141	6.3	208	0.5	0.9	1/4"	82	3.5

Consumables not available

MINI



1/4" 1/4" 3/8" 1/2"

40 Nm
NEO104KIT

£165.54

B

MINI PNEUMATIC RATCHET WITH INTERCHANGEABLE SQUARE DRIVES



1/4"

40 Nm
NE271

£105.02

B

MINI AIR RATCHET WRENCH



3/8"

40 Nm
NE371

£105.02

B

MINI AIR RATCHET WRENCH

	Square drive	Torque range	Max. torque	Free speed	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level
	Inch	Nm	Nm	R.P.M	bar	mm	kg	Inch	Inch	dBA
NEO104KIT	1/4", 3/8", 1/2"	5-30	40	400	6.3	159	0.48	1/4"	3/8"	81.5
NE271	1/4"	5-30	40	300	6.3	134	0.45	1/4"	3/8"	81.5
NE371	3/8"	5-30	40	300	6.3	134	0.45	1/4"	3/8"	81.5

MINI



★★★
★★★
Ø 75 mm
QC113

£111.25 B

MINI DISC ANGLE CUT-OFF

Disc diameter	Free speed	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	
mm (Inch)	R.P.M	bar	mm	HP	kg	Inch	Inch	dBA	
				hp					
QC113	75 (3")	18 000	6.3	129	0.3	0.53	1/4"	3/8"	81.5



★★★ 6 & 3 mm
★★★ **QA102A**

£76.54 B

MINI STRAIGHT DIE GRINDER



★★★ 6 & 3 mm
★★★ **QA602A**

£111.25 B

MINI 90° ANGLE GRINDER

Collet size	Free speed	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	
mm	R.P.M	bar	mm	HP	kg	Inch	Inch	dBA	
				hp					
QA102A	6 & 3	25 000	6.3	115	0.3	0.29	1/4"	3/8"	82
QA602A	6 & 3	18 000	6.3	126	0.3	0.43	1/4"	3/8"	81.5



★★★ 5500 RPM
★★★ **QE102**

£136.17 B

MINI ANGLE DRILL
With keyed chuck.



★★★ 5500 RPM
★★★ **QE902**

£91.67 B

MINI STRAIGHT DRILL
With keyed chuck.

Chuck diameter	Free speed	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	
mm	R.P.M	bar	mm	HP	kg	Inch	Inch	dBA	
				hp					
QE102	1-6	5 500	6.3	140	0.3	0.60	1/4"	3/8"	81.5
QE902	1-6	5 500	6.3	158	0.3	0.48	1/4"	3/8"	81.5




M10
3/8" **★ ★ ★**
 Rocking Dog
102 Nm
NC3410 £106.80 **B**
 "BUTTERFLY"
 IMPACT WRENCH

M13
3/8" **★ ★ ★**
 Twin Hammer
474 Nm
NC3210

£220.72 **B**
 COMPACT
 IMPACT WRENCH



M16
1/2" **★ ★ ★**
 Jumbo Hammer
542 Nm
NC498
 £241.19 **B**
 COMPACT
 IMPACT WRENCH

M16
NC498MA £262.55 **B**
 IMPACT WRENCH SET WITH MINI
 SOCKETS - 8 PCS
 • 1 1/2" impact wrench (NC498)
 • 6 mini hex sockets:
 13, 17, 19, 21, 22, 24 mm
 • 1 1/4" male thread coupling






NEW

**POWERFUL AND
 COMPACT**

M14
1/2" **★ ★ ★**
 Jumbo Hammer
1496 Nm
NC4660Q
 £239.41 **B**
 COMPACT
 IMPACT WRENCH
















**IDEAL TO REACH NUTS
 IN NARROW SPACES.**

M16
1/2" **★ ★ ★**  
 Jumbo Hammer
884 Nm
NC4670Q
 £181.56 **B**
 COMPACT AND COMPOSITE
 IMPACT WRENCH



Reverse button can be used with one hand.

	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	ms ⁻²
													
NC3410	3/8"	M10 (17)	7-68	102	10 000	71	6.3	159	0.8	1/4"	3/8"	92.1	3.6
NC3210	3/8"	M13 (20)	136-407	474	10 000	113	6.3	142	1.5	1/4"	3/8"	92.1	3.6
NC498	1/2"	M16 (24)	108-405	542	6500	119	6.3	88	1.37	1/4"	3/8"	85	2.0
NC4660Q	1/2"	M14 (22)	272-1224	1496	7000	134	6.3	134	1.75	1/4"	3/8"	85	2.4
NC4670Q	1/2"	M16 (24)	204-680	884	9 000	147	6.3	105	1.1	1/4"	3/8"	85	3.3



PNEUMATIC IMPACT WRENCHES

M16
1/2" **★★★**
Jumbo Hammer
900 Nm
NC4650
COMPACT IMPACT WRENCH

£199.36 **B**

ALSO AVAILABLE IN SET

NC4650MA
£218.94 **B**
IMPACT WRENCH SET WITH MINI SOCKETS - 8 PCS

- 1x1/2" impact wrench (NC4650)
- 6 mini hex sockets: 13, 17, 19, 21, 22, 24mm
- 1 1/4" male thread coupling

NC4650KIT
£287.47 **B**
METRIC IMPACT SOCKET SET WITH ACCESSORIES - 11 PCS

LIMITED QUANTITY!

- 1 1/2" impact wrench (NC4650)
- 7 standard hex impact sockets: 13, 17, 19, 21, 22, 24, 27 mm
- 1 125mm extension bar
- 1 1/4" oiler
- 1 1/4" male thread coupling

3.91 kg

M19
1/2" **★★★**
Twin Hammer
1088 Nm
NC4299Q
COMPOSITE IMPACT WRENCH

£141.51 **B**

ALSO AVAILABLE IN SET

NC4299QMB
£186.01 **B**
IMPACT WRENCH AND SOCKET SET - 13PCS

- 1 1/2" impact wrench (NC4299Q)
- 1 impact socket set: 10, 11, 13, 17, 19, 22, 24, 27, 29, 30, 32 mm
- 1 1/4" male thread coupling

M25
1/2" **★★★**
Twin Hammer
1356 Nm
NC4236A
IMPACT WRENCH

£299.93 **B**

M25
1/2" **★★★** **Mg Magnesium**
Twin Hammer
1627 Nm
NC4255QA
COMPOSITE IMPACT WRENCH
7 spring-loaded blades

£227.84 **B**

ALSO AVAILABLE IN HARDCASE

NC4255QKIT
£318.62 **B**
METRIC IMPACT SOCKET SET WITH ACCESSORIES - 11 PCS

- 1 1/2" impact wrench (NC4255QA)
- 7 standard hex impact sockets: 13, 17, 19, 21, 22, 24, 27 mm
- 1 125 mm extension bar
- 1 1/4" oiler
- 1 1/4" male thread coupling

4.26 kg

	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
NC4650	1/2"	M16 (24)	244-542	900	9 000	132	6.3	104	1.4	1/4"	3/8"	95.0	2.4
NC4299Q	1/2"	M19 (30)	204-680	1088	8 500	133	6.3	194	2.1	1/4"	3/8"	85	3.2
NC4236A	1/2"	M25 (36)	271-949	1356	7 500	155	6.3	171	2.62	1/4"	3/8"	87.0	4.5
NC4255QA	1/2"	M25 (36)	271-1085	1627	8 500	136	6.3	179	1.7	1/4"	3/8"	85	4.7



M25
3/4" **★★★★**
New Twin Hammer

1627 Nm
NC6236

£339.98 **B**

COMPACT IMPACT WRENCH

M25
3/4" **★★★** **Mg**
Twin Hammer

1762 Nm
NC6255Q

£312.39 **B**

COMPOSITE IMPACT WRENCH
7 spring-loaded blades

7

ALSO AVAILABLE IN HARDCASE

M
NC6255QKIT £490.39 **B**

METRIC IMPACT SOCKET SET WITH ACCESSORIES - 11 PCS

- 1 3/4" impact wrench (NC6255Q)
- 7 standard hex impact sockets: 24, 27, 30, 32, 33, 34, 36 mm
- 1 175 mm extension bar
- 1 1/4" oiler
- 1 1/4" male thread coupling

kg 7.49 kg

138mm

M27
3/4" **★★★** **Mg**
Jumbo Hammer

1762 Nm
NC6610Q

£267.89 **B**

COMPACT IMPACT WRENCH

- 36% smaller
- 46% lighter
- 6% quieter than other 3/4" impact wrenches in the range.

M27
3/4" **★★★** **2034 Nm**
Twin Hammer

NC6218 £781.42 **B**

IMPACT WRENCH

M30
3/4" **★★★** **Mg**
Twin Hammer

2034 Nm
NC6266

£577.61 **B**

COMPOSITE IMPACT WRENCH
6 spring-loaded blades

6



PNEUMATIC IMPACT WRENCHES

M33

1" **2441 Nm**
Pin Less

NC8343_
IMPACT WRENCH

NC8343
Short anvil version: 381 mm

NC83438
Long anvil version: 590 mm

£373.80 **B**

£373.80 **B**



SPRING-LOADED BLADES



The springs reduce the passage of impurities that could block the rotation of the rotor blades.

- ▶▶▶ Optimal performance, even with low pressure.
- ▶▶▶ Reduced air consumption.
- ▶▶▶ Increased service life and performance.

M33

1" **3390 Nm**
Twin Hammer

NC8332X_
IMPACT WRENCH

NC8332X
Short anvil version: 372.6 mm

NC8332X6
Long anvil version: 525 mm

£914.92 **B**

£929.16 **B**



TIP: DON'T FORGET TO OIL YOUR IMPACT WRENCH REGULARLY, OR USE A M7 OILER



M35

1" **3118 Nm**
Twin Hammer

NC8266S_
COMPOSITE IMPACT WRENCH

NC8266S
Short anvil version: 430 mm

NC8266S6
Long anvil version: 580 mm

£857.96 **B**

£912.25 **B**



6 spring-loaded blades



M35

1" **3118 Nm**
Twin Hammer

NC8266P

£838.38 **B**

COMPOSITE IMPACT WRENCH

6 spring-loaded blades
Short anvil version: 256 mm

	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M.	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
NC6236	3/4"	M25 (36)	271-1220	1627	7 500	155	6.3	171	2.68	1/4"	1/2"	87	4.5
NC6610Q	3/4"	M27 (41)	203-1220	1762	7 000	144	6.3	138	1.8	1/4"	3/8"	85	3.1
NC6266	3/4"	M30 (46)	271-1760	2034	6 000	169	6.3	205	2.95	3/8"	1/2"	88	5.9
NC6255Q	3/4"	M25 (36)	271-1491	1762	8 500	136	6.3	198	1.9	1/4"	3/8"	85	4.7
NC6218	3/4"	M27 (41)	271-1898	2034	6 000	182	6.3	320	5.7	1/2"	1/2"	106	3.3
NC8343	1"	M33 (50)	271-2170	2441	3 900	325	6.3	381	12.56	1/2"	1/2"	103	6.3
NC83438	1"	M33 (50)	271-2170	2441	3 900	325	6.3	590	13.9	1/2"	1/2"	103	6.3
NC8332X	1"	M33 (50)	271-2710	3390	4000	226.5	6.3	372.6	9.4	1/2"	3/8"	103	8.2
NC8332X6	1"	M33 (50)	271-2710	3390	4000	226.5	6.3	525	10.6	1/2"	3/8"	103	8.2
NC8266S	1"	M35 (55)	272-2448	3118	4500	212	6.3	430	6.0	1/2"	1/2"	92	6.1
NC8266S6	1"	M35 (55)	272-2448	3118	4500	212	6.3	580	7.2	1/2"	1/2"	92	6.1
NC8266P	1"	M35 (55)	271-2710	3118	4500	254	6.3	256	5.90	1/2"	1/2"	92	6.1



1/4" ★★ **30 Nm**
NE2905 £184.23 **B**
 EXTENDED AIR RATCHET WRENCH 290 MM



1/4" ★★ **50 Nm**
NE261 £105.02 **B**
 PNEUMATIC RATCHET



3/8" ★★ **47.6 Nm**
NE3803 £99.68 **B**
 PNEUMATIC RATCHET



3/8" ★★ **50 Nm**
NE361 £101.46 **B**
 PNEUMATIC RATCHET



1/2" ★★ **68 Nm**
NE421 £97.01 **B**
 PNEUMATIC RATCHET



"No reaction" - anti-backlash

1/2" ★★ **68 Nm**
NE4901 £169.10 **B**
 "NO REACTION" PNEUMATIC RATCHET



Lock button

1/2" ★★ **81 Nm**
NE432MA £119.26 **B**
 PNEUMATIC RATCHET



1/2" ★★ **109 Nm**
NE4808 £117.48 **B**
 PNEUMATIC RATCHET



1/2" ★★ **95 Nm**
NE4305 £194.02 **B**
 EXTENDED AIR RATCHET WRENCH 390 MM





1/2" ★★ 135 Nm

NE483 £135.28 **B**

PNEUMATIC RATCHET

Reinforced gears for more durability



Double-speed trigger for better speed control



ALSO AVAILABLE IN SET

NE483MA £159.31 **B**

PNEUMATIC RATCHET WITH SOCKETS - 8 PCS

- 1 1/2" Pneumatic ratchet (NE483)
- 6 1/2" hex sockets: 13, 17, 19, 21, 22, 24 mm
- 1/4" male thread coupling



1.86 kg



Hollow socket and accessories for putting the threaded rod through.

1/2" ○ ★★ 135 Nm

NE0413 £312.39 **B**

PNEUMATIC RATCHET SET WITH ACCESSORIES - 13 PCS

- 1 1/2" pneumatic ratchet (NE461)
- 8 hex sockets: 8, 9, 10, 12, 13, 14, 17, 19 mm
- 1 75 mm extension bar
- 2 1/2" and 3/8" adaptor
- 1 1/4" male thread coupling





1/2" ★★ 204 Nm

NE4815A £167.32 **B**

PNEUMATIC RATCHET



M14

1/2" ★★ 339 Nm

NE499 £347.10 **B**

PNEUMATIC RATCHET

	Square drive	Torque range	Max torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
NE2905	1/4"	7-20	30	300	85	6.3	290	0.84	1/4"	3/8"	89	4.4
NE261	1/4"	13.5-47	50	230	130	6.3	160	0.5	1/4"	3/8"	88	3
NE3803	3/8"	7-40	47.6	300	102	6.3	220	0.63	1/4"	3/8"	92	3.2
NE361	3/8"	13.5-47	50	230	130	6.3	160	0.5	1/4"	3/8"	88	3
NE421	1/2"	13.5-47	68	160	113.28	6.3	265	1.04	1/4"	3/8"	92.8	4.6
NE4901	1/2"	13.5-54	68	1100	85	6.3	159	0.67	1/4"	3/8"	89	2.2
NE432MA	1/2"	13.5-61	81	160	113.28	6.3	265	1.22	1/4"	3/8"	89.8	5.2
NE4305	1/2"	20-75	95	160	142	6.3	390	1.63	1/4"	3/8"	82	1.2
NE4808	1/2"	13.5-74	109	180	113	6.3	280	1.26	1/4"	3/8"	95	3.6
NE483	1/2"	13.5-88	135	250	141	6.3	277	1.28	1/4"	3/8"	85	2.0
NE461 (NE0413)	1/2"	13.5-88	135	180	113	6.3	270	1.20	1/4"	3/8"	83	2.3
NE4815A	1/2"	54.4-163	204	170	136	6.3	313	1.54	1/4"	3/8"	93	2.5
NE499	1/2"	68-203	339	7 500	69.4	6.3	340	1.83	1/4"	3/8"	93	9.9



★★★
QA141L £248.31 B
STRAIGHT DIE GRINDER



★★★
QA163L £268.78 B
HEAVY DUTY
STRAIGHT DIE GRINDER



★★★
QA111A £78.32 B
STRAIGHT DIE GRINDER



★★★
QA311A £121.93 B
STRAIGHT DIE GRINDER



★★★
QA211A £89.89 B
STRAIGHT DIE GRINDER

ALSO AVAILABLE IN HARD CASE



★★★
QA313A £132.61 B
STRAIGHT DIE GRINDER



★★★
QA315 £147.74 B
STRAIGHT DIE GRINDER

★★★
QA0215A
£124.60 B

STRAIGHT DIE GRINDER SET WITH ACCESSORIES - 15 PCS

- 1 grinder (QA211A)
- 1 collet 3mm (1/8") and 6mm (1/4")
- 2 flat spanners for dismantling
- 5 grindstones (3mm - 1/8"): W145, W153, W163, W170, W176
- 5 grindstones (6mm - 1/4"): W220, W187, A22, A12, A5
- 1 Male thread coupling

1.30 kg



★★★
QA611A £107.69 B
90° ANGLE GRINDER



★★★
QA688A £172.66 B
AIR DIE GRINDER FLEX-HEAD
Power regulator



	Collet size	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s ²
						hp					
QA141L	6	24 000	396	6.3	170	0.4	0.6	1/4"	3/8"	75	2.5
QA163L	6	16 000	141	6.3	350	0.9	1.31	1/4"	3/8"	75	2.8
QA111A	6 & 3	25 000	283	6.3	155	0.3	0.38	1/4"	3/8"	81.5	1.8
QA211A	6 & 3	20 000	283	6.3	190	0.9	0.65	1/4"	3/8"	75.7	0.8
QA311A	6 & 3	25 000	283	6.3	190	0.3	0.48	1/4"	3/8"	81.5	1.8
QA313A	6 & 3	25 000	283	6.3	235	0.3	0.58	1/4"	3/8"	81.5	1.8
QA315	6 & 3	25 000	283	6.3	280	0.3	0.63	1/4"	3/8"	81.5	1.8
QA611A	6 & 3	19 000	283	6.3	160	0.3	0.51	1/4"	3/8"	74.4	1.7
QA688A	6 & 3	20 000	283	6.3	178	0.3	0.65	1/4"	3/8"	80	1.1

PNEUMATIC MICRO DIE GRINDERS

★★ QA412

£188.68 B

MICRO DIE GRINDER



★★ QA421

£174.44 B

MICRO DIE GRINDER



★★ QA432

£141.51 B

MICRO DIE GRINDER



★★ QA511

£105.02 B


ENGRAVING PEN



	Collet size	Free speed	Blows frequency	Air consumption	Air pressure	Length	Hose length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	R.P.M	Blows per minutes	L/min	bar	mm	mm	kg	Inch	Inch	dBA	m/s ²
QA412	3	60 000	-	76	6.3	170	1 500	0.24	1/4"	3/8"	70	0.5
QA421	3	60 000	-	76	6.3	150	1 500	0.22	1/4"	3/8"	70	0.5
QA432	3	70 000	-	29	6.3	137	1 425	0.20	1/4"	3/8"	70	0.5
QA511	-	-	13 000	29	6.3	140	1 420	0.23	1/4"	3/8"	78	0.6

PNEUMATIC ANGLE GRINDERS

Consumables not available



★★ Ø125 mm

QB135X

£178.89 B

ANGLE GRINDER WITH LEVER TYPE THROTTLE



★★ Ø125 mm

QB7215M


£281.24 B

ANGLE GRINDER WITH LEVER TYPE THROTTLE



	Disc diameter	Bore	Thread	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm (Inch)	mm		R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s ²
QB135X	125 (5")	22	M14*P2.0	11 000	170	6.3	230	0.78	1.81	1/4"	3/8"	87.8	1.2
QB7215M	125 (5")	22	M14*P2.0	11 000	119	6.3	232	1.3	1.81	1/4"	3/8"	90	1.2

PNEUMATIC GRINDERS



★★ Ø75mm

QC213

£85.26 B

GRINDER



★★ Ø75 mm

QC253

£121.04 B

GRINDER

	Disc diameter	Thread	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm (Inch)	mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s ²
QC213	75 (3")	10	20 000	283	6.3	200	0.9	0.86	1/4"	3/8"	80.2	10.8
QC253	75 (3")	-	24 000	113	6.3	203	0.6	0.8	1/4"	3/8"	91.0	1.2



★★ **Ø152 mm**
 ◎ 5 mm

QB45602

£220.72 **B**

VACUUM RANDOM ORBITAL SANDER

Consumables not available



★★ **Ø152 mm**
 ◎ 5 mm

QB54602

£173.55 **B**

VACUUM RANDOM ORBITAL SANDER



★★ **Ø152 mm**
 ◎ 5 mm

QB47602

£237.63 **B**

VACUUM RANDOM ORBITAL SANDER
 With central vacuum and suction hose.



★★★ **Ø100x110 mm**
 ◎ 2,5 mm

QB48111

£178.89 **B**

AIR JITTERBUG SANDER

LIMITED QUANTITY!



	Disc diameter	Number of holes	Orbit	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm (Inch)	-	mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s ²
QB45602	152 (6")	15	5	10 000	109	6.3	193	0.24	0.84	1/4"	3/8"	81.6	2.2
QB54602	152 (6")	6	5	10 000	85	6.3	210	0.24	0.78	1/4"	3/8"	81.6	1.5
QB47602	152 (6")	6	5	10 000	109	6.3	193	0.24	1.13	1/4"	3/8"	84.7	2.2
QB48111	100x110	-	-	11 000	198	6.3	130	0.28	0.91	1/4"	-	83	1.5




★★ **Ø76 mm**

QP113

£155.75 **B**

MINI SANDER



★★ **Ø76 mm**

QP123

£162.87 **B**

MINI POLISHER



★ **Ø30 mm**
 ◎ 3 mm

QP111

£138.84 **B**

MINI ANGLE SANDER



★★ **QP123AQP04**

£348.88 **B**

POLYCARBONATE HEADLIGHT RENOVATION FOAM SET WITH SANDER AND POLISHER - 8 PCS

- 1 mini sander (QP113)
- 1 mini polisher (QP123)
- 2 1/4" male thread coupling
- 1 hard polishing pad (QB9403)
- 1 medium polishing pad (QB9413)
- 2 tightening spanners

2,33 kg



★★ **Ø75 mm, Ø113 mm, Ø125 mm**

QP215

£108.58 **B**

3-DISC REVOLVER GRINDER



★★ **Ø178 mm**

QP317

£270.56 **B**

BUFFER

	Thread	Disc diameter	Orbit	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm (Inch)	mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s ²
QP113	5/16"-24	76 (3")	2.5	15 000	99	6.3	127	0.4	0.72	1/4"	3/8"	74	0.3
QP123	5/16"-24	76 (3")	-	2 100	99	6.3	135	0.4	0.77	1/4"	3/8"	74	0.21
QP111	M10xP1.5	26 (1")	3	8 000	152	6.3	160	0.3	0.55	1/4"	3/8"	89	0.3
QP215	7/16"-20	75-113-125	-	16000	184	6.3	160	0.8	1.20	1/4"	3/8"	60	1.8
QP317	5/8"-11	178	-	2500	169	6.3	406	0.4	2.04	1/4"	3/8"	84	2.5



PNEUMATIC BELT SANDERS



★★ 10 mm

QB311

£149.52

B

BELT SANDER

Consumables not available



★★ 20 mm

QB312

£277.68

B

BELT SANDER



★★★

QB325N

£331.08

B

BELT SANDER SET

Belt speed controller.

	Belt size	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
QB311	10x330	16 000	226	6.3	290	0.8	1/4"	3/8"	89.7	0.5
QB312	20x520	16 000	254	6.3	360	1.2	1/4"	3/8"	91.8	0.4
QB325N	6x330 - 10x330 - 20x330 - 20x520	16 000	113	6.3	320	2.1	1/4"	3/8"	90.0	1.0

PNEUMATIC SCREWDRIVERS



★★★ 12 Nm


RA101A

**STRAIGHT
SCREWDRIVER**

Twin Dog

£81.70

B

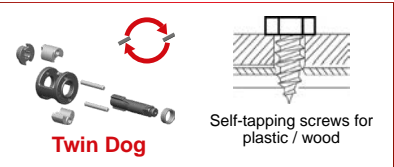

Twin Dog

Self-tapping screws for plastic / wood



★★★ 16.3 Nm

RA302

£146.85

B

**ADJUSTABLE
SCREWDRIVER**

Adjustable Clutch



★★★ 13.5 Nm

RA301

£135.28

B

**ADJUSTABLE
SCREWDRIVER**

Adjustable Clutch



**Adjustable
Clutch**



Self-tapping screws for thick material / sheet metal

★★★ 19 Nm

RA402

£290.14

B

**POSITIVE CLUTCH
SCREWDRIVER**

Adjustable Clutch



**Positive
Clutch**



Screws for wood

The positive clutch allows an effective transfer of torque, a reduced response time and continuous operation.

	Hex drive	Torque range	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch (mm)	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
RA101A	1/4" (6.35)	5-12	9 000	170	6.3	166	0.6	1/4"	3/8"	85.7	2.2
RA301	1/4" (6.35)	5-13.5	1 800	170	6.3	190	1.1	1/4"	3/8"	95.3	4.2
RA302	1/4" (6.35)	5-16.3	800	170	6.3	226	1.3	1/4"	3/8"	96.5	2.2
RA402	1/4" (6.35)	6-19	2200	111	6.3	180	1.1	1/4"	3/8"	91	2.3



★★★
1800 RPM
QE331

£96.12 **B**

REVERSIBLE DRILL WITH
KEYLESS CHUCK



★★★
2200 RPM
QE332

£86.33 **B**

DRILL WITH
KEYLESS CHUCK



★★★
1600 RPM
QE633

£165.54 **B**

ANGLE DRILL WITH
KEYLESS CHUCK

★★★
800 RPM
QE341

£156.64 **B**

REVERSIBLE DRILL WITH
KEYLESS CHUCK



★★★
2200 RPM
QE432

£160.20 **B**

KEYLESS
CHUCK DRILL



Chuck diameter	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s ²
					hp					
QE331	1800	184	6.3	203	0.65	1.1	1/4"	3/8"	96.5	0.3
QE332	2200	184	6.3	190	0.60	1	1/4"	3/8"	96.5	0.3
QE341	800	184	6.3	230	0.65	1.8	1/4"	3/8"	96.5	0.1
QE633	1600	85	6.3	209	0.50	1.1	1/4"	3/8"	72	2.5
QE432	2200	135	6.3	226	0.70	1.18	1/4"	3/8"	90.0	3.0



★★ PA201 £417.41 B

RIVETER
Hydropneumatic system
With nosepieces: 2.4, 3.2, 4.0, 4.8, 6.0, 6.4 mm.

★★ PA301 £170.88 B

RIVETER
Hydropneumatic system
With nosepieces: 2.4, 3.2, 4.0, 4.8 mm.



★★ PA203N £221.61 B

RIVETER
Hydropneumatic system
Alloy steel jaws. Cylinder and piston with chrome finish to limit friction and allow rivets to be released quickly. 360° use. Designed for intensive use.



★★ PB2402 £624.78 B

INSERT RIVETER
Hydropneumatic system
Inserts not included.



IN HARDCASE

	Capacity	Stroke length	Traction	Air consumption	Air pressure	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	mm	kg-f	L/cycle	bar	kg	Inch	Inch	dBA	m/s ²
PA201	2.4-6.4	14	1603	2.32	6.3	1.8	1/4"	3/8"	79.7	0.8
PA301	2.4-4.8	16	1045	1.48	6.3	1.5	1/4"	3/8"	79.7	0.3
PA203N	3.2-6.4	16	1200	1.48	6.3	1.5	1/4"	3/8"	79.7	0.5
PB2402	Steel M4-M10 Stainless M4-M8	9	1650	1.5	6.3	1.55	1/4"	3/8"	82	0.8

RIVETER	MATERIAL		RIVET DIAMETER (ØMM)					
	RIVET	CHUCK	(2.5) 2.4	(3.0) 3.2	4.0	(5.0) 4.8	6.4	8.0
PA201	aluminum	aluminum						
	aluminum	steel						
	steel	steel						
	stainless	stainless						
PA203N	aluminum	aluminum						
	aluminum	steel						
	steel	steel						
	stainless	stainless						
PA301	aluminum	aluminum						
	aluminum	steel						
	steel	steel						
	stainless	stainless						



NEW

MINI

★★★★

SN1350

£178 **B**

MINI AIR NEEDLE SCALER
 Low Vibration, Easy to Control.
 Ultra-Lightweight, One-Handed Use.
 Fast & Efficient Surface Cleaning.
 12 Steel Needles for Hard-to-Reach Areas.

★★★★

SN1288

£134.39 **B**

NEEDLE SCALER
 For hard to reach areas.

★★★★

SN2110

£259.88 **B**

NEEDLE SCALER
 Pistol style.
 Designed to withstand intense use.
 Light and easy to use.

	Needle diameter	Number of needles	Stroke length	Blows per minute	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm		mm	bpm	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
SN1350	2x100	12	15	6 000	28.3	6.3	251	0.65	1/4"	3/8"	80	1.5
SN2110	3x180	19	33	3 700	424	6.3	330	2.8	1/4"	3/8"	97	9.7
SN1288	3x125	12	32	5 500	85	6.3	290	1.3	1/4"	3/8"	86	7.7

PNEUMATIC SHEARS AND SAWS

★★★★

QD321

£204.70 **B**

-30%

STRAIGHT SABRE SAW
 Air exhaust designed to reduce vibrations by 30%. Long stroke to optimise efficiency by 20%.

★★★★

QD221

£188.68 **B**

STRAIGHT SABRE SAW
 Set of 5 files and 2 blades included

Ø 4.0 mm

67

★★★★

QG102

£93.45 **B**

STRAIGHT SHEAR

★★★★

QG103

£96.12 **B**

NIBBLER
 Reinforced punch for increased operating life. Die adapted for round cuts. Ø 4.5mm.

	Cutting capacity	Cut length	Strokes per minute	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	mm	S.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
QD321	-	14.5	11000	113	6.3	230	0.6	1/4"	3/8"	83	2.0
QD221	1.6	10	5000	113	6.3	250	0.8	1/4"	3/8"	81.9	4.1
QG102	Stainless : 1 Steel : 1.2 Aluminium : 1.6	-	2600	170	6.3	254	1	1/4"	3/8"	85.8	2.4
QG103	Steel : 1.2 Aluminium : 1.6	-	2 600	85	6.3	193	1	1/4"	3/8"	88	1.6



PNEUMATIC HAMMERS



SC211C

£98.79

B

ROUND CHISEL CHIPPING HAMMER
5 chisels included



SC342

£166.43

B

HEX CHISEL CHIPPING HAMMER



SC221C

£100.57

B

HEX CHISEL CHIPPING HAMMER

5 chisels included



ALSO AVAILABLE IN HARDCASE



SC0617C

CHIPPING HAMMER SET WITH ACCESSORIES - 7 PCS

- 1 hex chisel chipping hammer (SC221C)
- 5 chisels (SC425)
- 1 retaining spring

£115.70

B



SN1032

£160.20

B

QUICK RELEASE STRAIGHT CHIPPER
1 chisel included



SC371C

£217.16

B

ROUND CHISEL CHIPPING HAMMER

5 chisels included



	Type of fitting	Shank diameter	Stroke length	Blows frequency	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
		mm	mm	Blows per minutes	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
SC221C	Hex	10	67	3200	113	6.3	175	1.7	1/4"	3/8"	98	12.3
SC342	Hex	10	92	2200	232	6.3	228	2	1/4"	3/8"	94.7	10.6
SC211C	Round	10.2	67	3200	113	6.3	175	1.7	1/4"	3/8"	98	12.3
SC371C	Round	10.2	62.5	3000	180	6.3	180	1.7	1/4"	3/8"	95	8.8
SN1032	Square	13	33	4000	120	6.3	290	1.33	1/4"	3/8"	91	14.5

PNEUMATIC GREASE GUNS



SG405

£71.02

B

GREASE GUN
SG902 adapter included



SG407

£128.16

B


GREASE GUN
Continuous flow
SG212 flexible hose and
SG902 adapter included



! ONLY WORKS WITH 400 CC GREASE CARTRIDGES



	Working pressure	Max. pressure	Cartridge capacity	Net weight	Air inlet	Air hose	Sound level	Vibration level
	bar	bar	C.C	kg	Inch	Inch	dBA	m/s ²
SG407	2.8 - 8.24	10.5	400	1.6	1/4"	3/8"	74	2
SG405	2.8 - 8.24	10.5	400	1.46	1/4"	3/8"	80.2	0.7

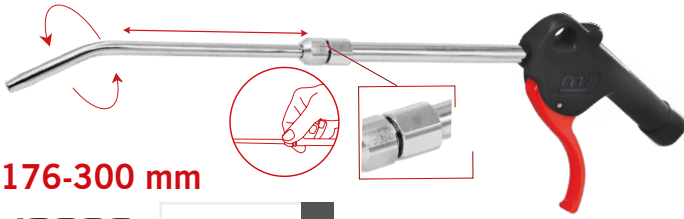

176-300 mm

JC202

£17.80 **B**

EXPANDABLE BLOW GUN



Movable venturi nozzle

JC602

£32.93 **B**

HIGH-FLOW BLOW GUN

JC4_

WIDE NOZZLE PROGRESSIVE BLOW GUN

Wide nozzle

Metallic Nozzle

JC405

125 mm version

£8.01 **B**

JC410

150 mm version

£10.68 **B**

JC412

300 mm version

£11.57 **B**

JC424

600 mm version

£19.58 **B**

JC435

875 mm version

£24.92 **B**

JC116LD

400 mm version

£38.72 **B**

JC122LD

560 mm version

£44.50 **B**

2-IN-1 AIR BLOW GUN

Designed for narrow spaces.
Effective internal cleaning for hard-to-reach areas like radiators and cylindrical filters.

NEW

Aluminium

2 nozzles included:

JC116H01

Side holes nozzle:
Creates surrounding airflow for wide-area cleaning.

JC116E01

High flow nozzle:
Maximizes airflow for deep, concentrated cleaning.



1M

JC641

ANGLED BLOW GUN

£55.18 **B**

Aluminium

Fixed venturi nozzle

1M/2M

JC680

BLOW GUN

1m extension included

£79.21 **B**

Aluminium

Movable venturi nozzle

2m

Removable extension

	Nozzle length	Working pressure	Max. pressure	Air consumption		Net weight	Air inlet	Air hose	Sound level
	mm	bar	bar	L/min	L/min	kg	Inch	Inch	dBA
JC202	176 - 300	6.2-8.5	11.7	-	144	0.22	1/4"	3/8"	90
JC602	50.8	6.2-8.3	15.6	368	425	0.60	1/4"	3/8"	90
JC405	125	5.3-8.5	10.6	368	425	0.11	1/4"	3/8"	90
JC410	250	5.3-8.5	10.6	368	425	0.12	1/4"	3/8"	90
JC412	300	5.3-8.5	10.6	368	425	0.13	1/4"	3/8"	90
JC424	600	5.3-8.5	10.6	368	425	0.14	1/4"	3/8"	90
JC435	875	5.3-8.5	10.6	368	425	0.25	1/4"	3/8"	90
JC116LD	400	5.3-8.5	11.7	140	-	0.206	1/4"	3/8"	90
JC122LD	560	5.3-8.5	11.7	140	-	0.245	1/4"	3/8"	90
JC641	1000	5.3-8.5	10.6	368	425	0.34	1/4"	3/8"	90
JC680	2000	5.3-8.5	10.6	368	425	0.64	1/4"	3/8"	90

PNEUMATIC TOOLS

TORQUE TESTS

Our torque tests are carried out in accordance with the ISO standard, using a 3-metre hose and air pressure set at 6.3 bars.



Torque capacity [Tightening test]

Torque range – The range (2 values) reached by the tool after 8 seconds, defined by the lowest speed (1st value) and the highest speed (2nd value) when tightening a fastener.



Max torque [loosening test]

Max torque - The maximum torque reached by the tool, after 5 seconds, when loosening a free fastener.

CLASSIFICATION



Efficiency / performance

Simple use for completing tasks quickly. These tools combine efficiency and performance.



Strength

These tools produce high torque levels, superior grinding power and strong cutting energy.




Endurance

Tools built to last with a low failure rate.

TORQUE LOSS PROBLEMS

1

Check that the selector is in the correct position




2

Check that the air pressure reaches 90 PSI (6.3 bars)



3

Put 5 drops of pneumatic oil into the air inlet then press the trigger



4

Send the tool to the service centre





AUTO




M8

1/4" 
Rocking Dog
NC0208M

£204.70














B

 1.75 kg

PRE-CALIBRATED IMPACT WRENCH FOR GLOW PLUGS - 9PCS

- 1 impact wrench
- 5 1/4" deep sockets: 8, 9, 10, 11, 12 mm
- 1 50mm extension bar
- 1 1/4" 37mm joint
- 1 1/4" male thread coupling



	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
													
NC2710	1/4"	M8 (13)	10-40	40	11 000	150	6.3	136	0.8	1/4"	3/8"	91.0	3.4


QK111

£146.85










B

PNEUMATIC OSCILLATING KNIFE

Blade can be mounted in 12 different ways depending user's needs. Reduced vibrations.

Curved blade included QK2030P



	Strokes per minute	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	S.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
									
QK111	20 000	170	6.3	180	1.1	1/4"	3/8"	75	3.9


QB802

£223.39

B

PNEUMATIC SCRUBBER

Can be used to remove rust, oxide, tags, stickers, etc. without heat up damaging the paint.

Durable, easy to use and does not get hot during operation



ALSO AVAILABLE IN HARDCASE


QB0808M










£349.77

B

PNEUMATIC SCRUBBER SET WITH ACCESSORIES - 6 PCS.

- Pneumatic buffer (QB802)
- Rubber brush
- Scouring wheel
- Straight metal brush
- Hooked metal brush
- 1/4" male thread coupling



	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air hose	Sound level	Vibration level
	R.P.M	L/min	bar	mm	HP	kg	Inch	dBA	m/s ²
									
QB802	3600	300	6.3	200	0.7	1.2	3/8"	86	0.3

SQ0104

£90.78

B

BRAKE CALIPER WIND BACK KIT - 4 PCS

- Pneumatic caliper wind back tool
- Adaptor for SAAB, HONDA, ALFA ROMEO, AUDI, VW, LANCIA
- 3/8" #5 adaptor
- 1/4" Male thread coupling



ALSO AVAILABLE IN HARDCASE

NEW

SQ0218

£171.77

B

PNEUMATIC BRAKE CALIPER WIND BACK KIT - 18 PCS

- 1 pneumatic wind back tool
- 17 adaptors for disc brakes (right and left gage)



3.2 kg



SR2001KIT

£69.42

B

- 1 1.5m long Air Hose (M5*0.45)
- 1 glazed reservoir van 22 cm³
- 1 50 c.c. Glass Jar
- 1 Airbrush
- 1 Wall bracket
- 1 2c.c. Cup
- 1 adapter M5*0.45 male to 1/4" female
- 1 Spanner
- 1 8c.c Cup

AIR BRUSH KIT

Dual action trigger to control the paint flow. Wall bracket included, allowing you to store the airbrush when it is at rest. Air volume adjustment button. Lightweight and ergonomic body, ideal for one-handed use. Ultra-fine 0.3mm nozzle for high precision.

	Nozzle diameter	Capacity	Air hose
	mm	cm ³	Inch
SR2001KIT	0.3	2 - 8	1/4"



SK1010

£46.28

B

AIR CAULKING GUN

Progressive trigger, automatic decompression in the stop position. For a simple and precise application of numerous cartridge products: glue, silicon etc.



SK1131

£161.98

B

AIR CAULKING GUN

Progressive trigger, automatic decompression in the stop position. For a simple and precise application of numerous cartridge products: glue, silicon etc.

	Reservoir capacity	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose
	ml	L/min	bar	mm	kg	Inch	Inch
SK1010	300	113	3.4-4.8	305	1.1	1/4"	3/8"
SK1131	300 - 600	113	4.1-6.2	620	1.21	1/4"	3/8"

Ø25-110mm QM1125

£219.83

B

PNEUMATIC BELLOWS SPREADER

For easy fitting of CVJ boots.

Do not use with a pressure exceeding 8.6 bars.



	Joint diameter	Air pressure	Length	Net weight	Air inlet	Air hose
	mm	bar	mm	kg	Inch	Inch
QM1125	25-110	6.3-8.6	442	3.25	1/4"	3/8"



★ ★ 1L

SX2101
CLEANING GUN

Rotating metal nozzle. Equipped with a valve for cleaning and drying. Ideal for removing stains from fabric or carpets, removing grease from bodywork and for cleaning engine blocks, radiators and oil stains.

£127.27 B



2L

SM0502
FLUID EXTRACTOR 2L

Pneumatic version

For brake fluid. Delivered with a 1L bottle equipped with a locking clamp to easily fill the tank with brake fluid. New safety design: when the tank is full, the air inlet mechanism automatically shuts down. Delivered with 1 main hose (1.30m) + 1 spiral brake hose (1.20m) + 1 secondary hose (1.12m).

£226.06 B

9L
SM0901

FLUID EXTRACTOR 9L

Pneumatic or manual version

For engine oil pans, transmission oil, coolant, power steering fluid, brake fluid, etc. Works with or without air compressor thanks to the integrated manual pump. New safety design: when the tank is full, the air inlet mechanism automatically shuts down. Delivered with 1 main hose (1.30m) + 1 spiral brake hose (1.20m) + 1 secondary hose (1.12m).

£255.43 B



⚠ Do not use with flammable liquids.

⚠ Do not use with flammable liquids.

	Reservoir capacity	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level
	L	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA
SX2101	1 L	5 500	56.6	6.3	210x110	0.78	1/4"	3/8"	85
SM0502	2 L	-	166	4.8-11.6	350	2.5	1/4"	-	-
SM0901	9 L	-	166	4.8-11.6	640	4.7	1/4"	-	-

WG202N

£72.09 B

AIR WONDER GUN KIT - 8 PCS

Used for cleaning or vacuuming dust, wood chips, filings, broken glass, etc. Double function: vacuum and blow gun

- 1 Gun
- 1 Vacuum tip
- 1 Thin tip
- 1 Flexible nylon brush tip
- 1 Fixed extension
- 1 Flexible extension
- 1 Textile vacuum bag
- 1 Clip
- 1 Male thread



SX4101

£69.42 B

PNEUMATIC SAND BLASTER (0.6 L)

Cylindrical nozzle.

Carbon steel S45C nozzle.


- Particle Size - Mesh (#) Max.: 80
- Particle Size - Micron (µm) Max.: 177
- Particle Size - (mm) Max.: 0.177



	Joint diameter	Reservoir capacity	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm	L	L/min	bar	mm	kg	Inch	Inch	dBA	m/s ²
WG202N	-	-	3.36	6.3	145	0.6	1/4"	3/8"	92	7.5
SX4101	-	0.6	226.5	6.3	197	0.36	1/4"	3/8"	82.0	-



GARAGE

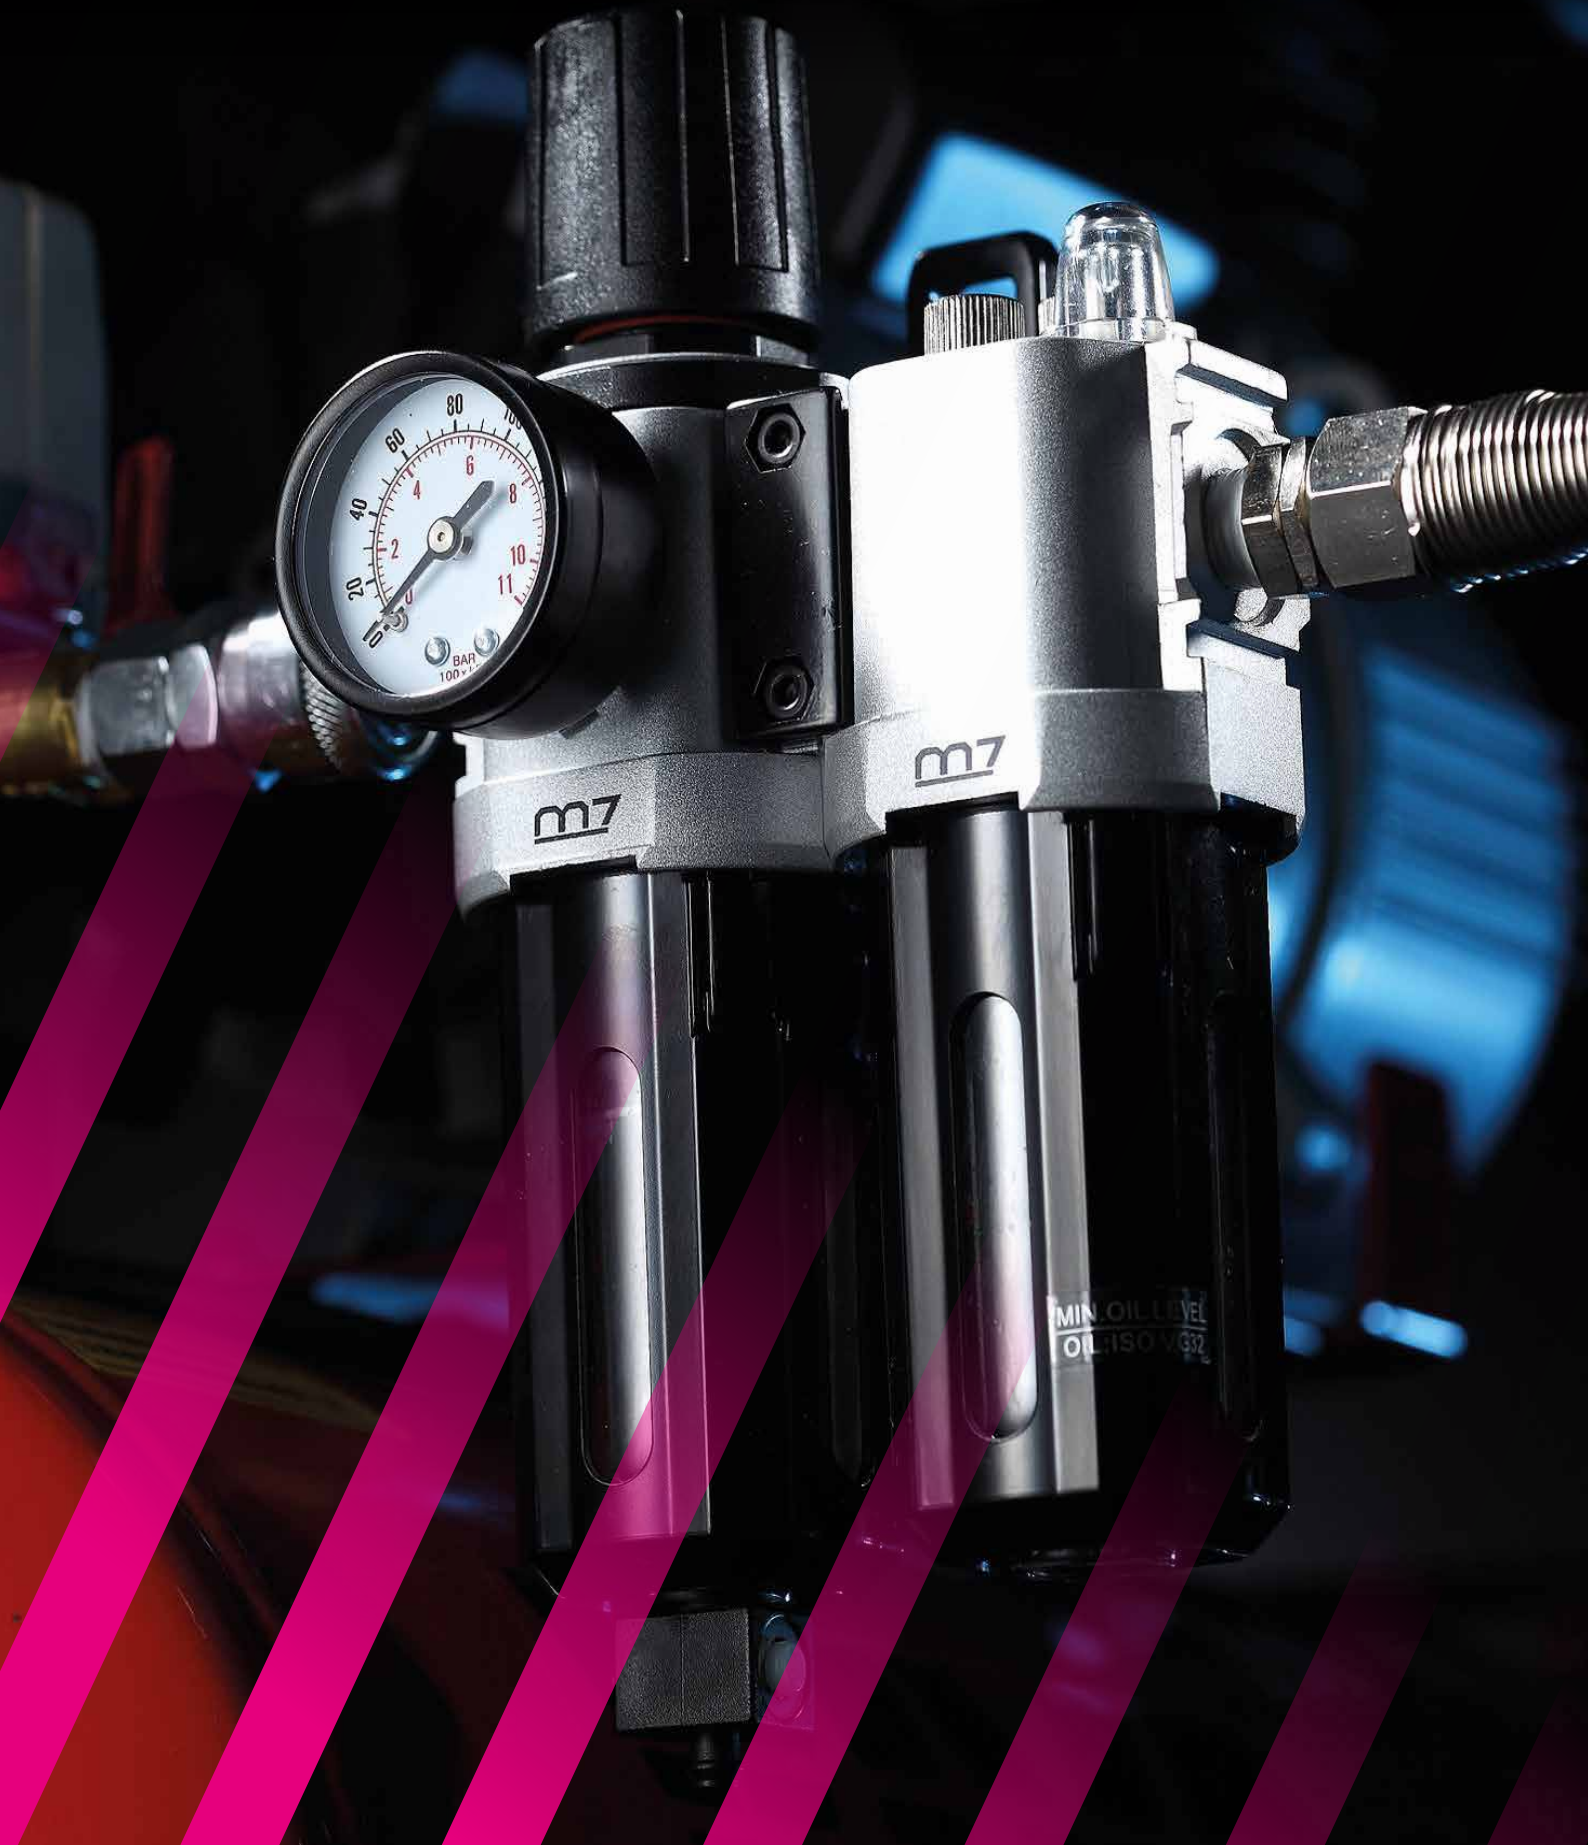

1/4" OR 3/8"

SW1_A

OILER

Air inlet: 1/4". Max. oil content: 8cc. Connect directly to the hose for automatic lubrication.



SW12A
1/4" - 100g version

£6.68 B

SW13A
3/8" - 130g version

£6.85 B

SGU202

£11.21 B

LUBRICATING OIL CAN FOR PNEUMATIC TOOLS

Low pouring point (anti-freeze). Contains extreme-pressure and anti-wear additives. Good protection against corrosion. Optimised demulsification (fast separation in case of pollution by water condensation). Viscosity level at 40°C: 22.



SG101

£22.61 B

LUBRICATION KIT

Injection into lubrication inlet. Working temperature: -20°C to 180°C. Saves on maintenance costs. Stops corrosion of parts. Improves performance. Prolongs tool-life.



LUBRICATOR AND REGULATOR FILTERS

1/4"



SV2260

£87.22 B

LUBRICATOR AND REGULATOR FILTER

Can even be filled under pressure.

NEW

3/8"



SV2360

£91.67 B

LUBRICATOR AND REGULATOR FILTER

Can even be filled under pressure.

1/2"




SV2431

£172.66 B

LUBRICATOR AND REGULATOR FILTER

Can even be filled under pressure.

	Max input pressure	Output adjustable air pressure	Air flow	Threads (inlet/outlet)	Temperature range	Filtration	Condensate tank capacity	Oil tank capacity	Weight
	bar	bar	l/min	pouces	°C	µm	ml	ml	kg
SV2260	15	4.8 - 9.6	1750	1/4"	5~60	5	80	150	0.97
SV2360	15	4.8 - 9.6	2500	3/8"	5~60	5	80	150	1.4
SV2431	20	4.8 - 9.6	3400	1/2"	5~60	40	80	200	1.5

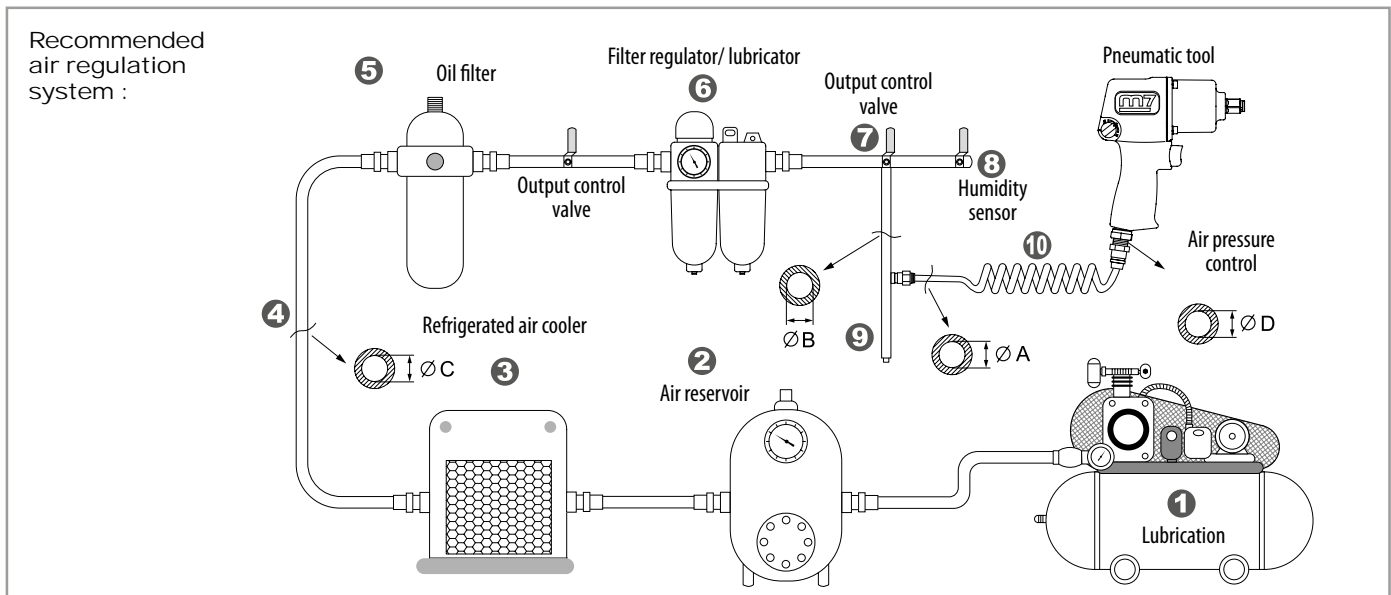




SB201 £62.30 **B**
DIGITAL TYRE INFLATOR

Measures from 0 to 12 bars with an accuracy of 0.01 bars.
Clip retainer.
30cm version



SB215 £63.19 **B**
DIGITAL TYRE INFLATOR

Measures from 0 to 12 bars with an accuracy of 0.01 bars.
Clip retainer.
150cm version

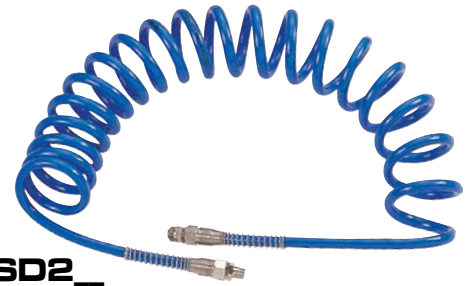

SD2_
SPIRAL EXTENSION
Polyurethane

10M
SD23210
10M (5mm) version
£24.21 **B**

SD23110
10M (8mm) version
£40.32 **B**

15M
SD23115
15M (8mm) version
£51.89 **B**

SD23315
15M (10mm) version
£61.41 **B**

SD24415
15M (13mm) version
£67.82 **B**

Adjustable stop

Closed housing

180°

SA3_A
PNEUMATIC HOSE REEL

SA3215A
15M, 1/4" version

£128.16 **D**

SA3315A
15M, 3/8" version

£128.16 **D**

Polymer hybrid shape memory hose



Braided polymer hose

Open housing

Adjustable stop

4 protective wheels

SA4_A
PNEUMATIC HOSE REEL

SA4320A
20M, 3/8" version

£292.81 **D**

SA4420A
20M, 1/2" version

£345.32 **D**



1/4" 25 M

SD26125A

£55.54 **B**

1/4" PNEUMATIC HOSE

Ideal for work under high pressure.
Light, flexible, durable and anti-erosion PVC Hose.
Fittings resistant up to 17.8 bar and perfectly sealed.

	Air consumption	Air hose	Internal diameter	External diameter	Hose length	Working pressure	Max. pressure	Male thread	Net weight
	L/min	Inch	mm	mm	M	bar	bar	inch	kg
SB201	39	3/8"	-	-	-	6.3	11	1/4"	0.32
SB215	39	3/8"	-	-	-	6.3	11	1/4"	0.32
SA3215A	-	-	8	12	15	6.3	20	1/4"	5
SA3315A	-	-	10	15	15	6.3	20	3/8"	6
SA4320A	-	-	10	15	20+1	6.3	20	3/8"	24
SA4420A	-	-	13	18	20+1	6.3	20	1/2"	29
SD23210	-	-	5	8	10	7	17.8	1/4"	0.935
SD23110	-	-	8	12	10	7	17.8	1/4"	0.5
SD23115	-	-	8	12	15	7	17.8	1/4"	1.35
SD23315	-	-	10	15	15	7	17.8	3/8"	1.9
SD24415	-	-	13	18	15	7	17.8	1/2"	2.1
SD26125A	-	-	8	14	25	7	17.8	1/4"	4

SA10_D
ELECTRIC
CABLE REEL



SA1015D
15M - 1.5mm² version

£138.84 D

SA1020D
20M - 1.5mm² version

£166.43 D

SA1115D
15M - 2.5mm² version

£182.45 D

	Cable length	Wire cross section	Number of wires	Power	Dimensions	Weight
	M	mm ²		V	mm	kg
SA1015D	15	1.5	3	230	350x180x325	5.8
SA1020D	20	1.5	3	230	350x180x325	5.8
SA1115D	15	2.5	3	230	350x180x325	6.8



EXTRACTORS

SC0320

£357.78

B

AIR VIBRATION INJECTOR PULLER - 24 PCS

Designed to replace the sliding hammer without hand using. Save the power and time to pull out the injector from engine. High torque and two speeds designed to pull out the injector quickly.



Adapters included :

M20	M18	M17	M10	M8	M8	M22	M20	M31	M26
P1.0	P0.75	P1.0	P1.5	P1.25	P1.0	P1.5	P1.5	P0.75	P0.75
M18	M16	M14	M14	M29	M27	M27	M25	M25	
P1.5	P1.5	P1.5	P1.5	P1.0	P1.0	P0.75	P1.0	P0.5	



SC005

£47.17

B

BALL JOINT & TIE-ROD SPLITTER SET - 5 PCS

- Steering ball joint separator - 17mm
- Steering ball joint separator - 23mm
- Pitman arm tool - 28mm
- Air hammer adaptor - 184mm
- Air hammer adaptor Ø 10,2mm

	Piston Stroke	Blows frequency	Max. torque	Thread	Air pressure	Max air pressure	Length	Net weight	Air inlet	Air hose
	mm	Blows per minutes	Nm	L/min	bar	bar	mm	kg	Inch	Inch
SC0320	38	300/900	600	M18 x 1.5	6-9	10	500	2.7	1/4"	12



1/2"

SH1001

£44.32 **B**

MAGNETIC MOUNT FOR AIR TOOLS
Compatible with all 1/2" air impact wrenches (except compact and mini ranges).



3/4"

SH1002

£23.41 **B**

MAGNETIC MOUNT FOR AIR TOOLS
Compatible with all 3/4" air impact wrenches (except compact and mini ranges).



QB46602AJC

£177.11 **B**

SANDER AND AIR GUN FOAM SET - 7 PCS
Extendable air gun. Comes with 2 disk mountings.



BA80129

£19.58 **D**

TOOL BAG

8 inside pockets, 3 outside pockets and 1 net pocket on the outside. Diagonal strap for balance. Opens 100%. Hard rubber base (anti-slip / shock-proof). 40x22x30cm.



SP105 5 kg

£75.29 **B**

SPRING BALANCER

Practical and compact, these balancers have a rotating wheel for easy cable tension setting. Stainless steel housing. Ball locking system to prevent the cable from retracting into the housing.

Lifting capacity	Cable Length	Type	Cable diameter	Net weight	
kg	m		mm	kg	
SP105	3-5	1.5	Cable	3.2	0.81



M7S9509

£120.15 **D**

POWER TOOLS STORAGE RACK WITH POWER STRIP



Torque accuracy: clockwise: $\pm 1.5\%$, counter-clockwise: $\pm 2.5\%$.
AA batteries x2 (included).

1/4" ★★ **1.5-30 Nm** £319.51 **B**
GTA201030
DIGITAL ANGULAR TORQUE WRENCH



3/8" ★★ **6.8-135 Nm** £328.41 **B**
GTA306135
DIGITAL ANGULAR TORQUE WRENCH



1/2" ★★ **17-340 Nm** £399.61 **B**
GTA417340
DIGITAL ANGULAR TORQUE WRENCH



3/4" ★★ **100-1000 Nm** £1,294.95 **B**
GTA610100
DIGITAL ANGULAR TORQUE WRENCH




Torque accuracy: clockwise: $\pm 1.5\%$, counter-clockwise: $\pm 2.5\%$.
AA batteries x2 (included).

1/2" **6-60 Nm** £435.21 **B**
GDI406060
DIGITAL TORQUE WRENCH WITH INTERCHANGEABLE RATCHET



1/2" **34-340 Nm** £493.95 **B**
GDI434340
DIGITAL TORQUE WRENCH WITH INTERCHANGEABLE RATCHET



Torque accuracy: clockwise: $\pm 1.5\%$, counter-clockwise: $\pm 2.5\%$.
3.7 V, 1600 mAh rechargeable battery.

1/2" ★★ **6-60 Nm** £542.01 **B**
GBI406060
BLUETOOTH DIGITAL TORQUE WRENCH WITH INTERCHANGEABLE RATCHET



1/2" ★★ **34-340 Nm** £600.75 **B**
GBI434340
BLUETOOTH DIGITAL TORQUE WRENCH WITH INTERCHANGEABLE RATCHET



	Square drive	Gear	Torque range	Torque indicator	Torque adjustment	Dimensions	Net weight
	Inch	teeth	Nm	LCD		mm	kg
GTA201030	1/4"	72	1.5-30	LCD	digital	410 x 38 x 38	0.71
GTA306135	3/8"	72	6.8-135	LCD	digital	432 x 38 x 38	0.84
GTA417340	1/2"	72	17-340	LCD	digital	622 x 41 x 38	1.4
GTA610100	3/4"	24	100-1000	LCD	digital	1235 x 58 x 63	4.6
GDI406060	1/2"	72	6-60	LCD	digital	450 x 31 x 37	1.10
GDI434340	1/2"	72	34-340	LCD	digital	659 x 31 x 37	1.40
GBI406060	1/2"	72	6-60	LCD	digital	435 x 31 x 38	1.13
GBI434340	1/2"	72	34-340	LCD	digital	644 x 31 x 38	1.43



ACCESSORIES



FOR IMPACT WRENCH



1/2" **MA42006M** ○

£22.25 **B**

1/2" METRIC MINI IMPACT SOCKET SET - 6 PCS

- 13, 17, 19, 21, 22, 24 mm

0.51 kg



1/2" **MB42011M** ○

£53.40 **B**

1/2" METRIC IMPACT SOCKET SET - 11 PCS

- 10, 11, 13, 17, 19, 22, 24, 27, 29, 30, 32 mm

1.87 kg



1/2" **MB42011M1** ○

£43.61 **B**

1/2" METRIC IMPACT SOCKET SET - 11 PCS

- 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21 mm

1.29 kg



1/2" **MB43015M** ○

£100.57 **B**

1/2" METRIC IMPACT SOCKET SET - 15 PCS

- 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32 mm

4.26 kg



3/4" **MB62010M** ○

£122.82 **B**

3/4" METRIC IMPACT SOCKET SET - 10 PCS

- 19, 22, 24, 27, 30, 32, 36, 38, 40, 42 mm

4.90 kg



FOR 4 IN 1 CORDLESS GARDENING TOOL DGM101



DGM901

£57.85 **D**

REMOVABLE TRIMMING HEAD



DGM902

£34.71 **D**

REMOVABLE BRUSH CUTTER HEAD



DGM903

£70.31 **D**

REMOVABLE HEDGE-TRIMMING HEAD



DGM904

£48.06 **D**

REMOVABLE EDGE-TRIMMING HEAD

WET/DRY BLOWER VACUUM CLEANER DDWV104KIT



DDWV900F

£15.58 **B**

HEPA FILTER



DDWV902

£12.02 **B**

BIG BRUSH + 3 PLASTIC TUBES



DDWV903

£2.23 **B**

NOZZLE



DDWV904

£5.34 **B**

SOFT TUBE

FOR DRILLS



QEHSS2510

£10.50 **B**  288 g

DRILL BIT SET - 10 PCS.

- 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 4.5, 5, 5.5 mm
- Manufactured from high hardness HSS for easier and faster drilling.

HSS HSS steel



QEHSS3

£90.78 **B**

FLUTE HSS STEP DRILL SET - 3 PCS.

- 4-12, 4-20, 4-30 mm
- The 3 flutes guarantee a clean and vibration-free cut. Ideal for soft materials such as plastics or light alloys. Cutting forces distributed over 3 edges, allowing a greater advance. The chamfer facilitates removal in the case of through holes.

HSS HSS steel

 Three-sided shank

 Point angle: 118°

 Step angle: 90°

 Material thickness: 4 mm max



 1.2 kg

QEHSS11325

£44.86 **B**

MECHANIC TWIST DRILL SET - 25 PCS

- 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13 mm


High-performance drill made from heavy-duty steel. Less breakage than ground drill. Suitable for on site work, use with a cordless drill driver. Application areas: steel, aluminium, plastics, brass, bronze, cast iron.

HSS-R HSS-R steel

DIN 338 Short drill bit, cylindrical shank

 Cutting type: straight

 Cylindrical shank

 Drilling depth: 5 x diameter

 Spiral angle: 25° - 30°

 Point angle: 118°



 1.2 kg

QEHSSC25

£112.67 **B**

HSS-E 5% COBALT DRILL BIT SET - 25 PCS

- 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13 mm


High performance helical drill bit made of 5% cobalt steel. Cobalt provides solidity, resistance and improves drill bit's hardness. Excellent resistance to high temperatures. Best suited for drilling stainless steel and other tough materials up to 1100 N/mm². Suited for: tough and processed steel, aluminium, plastics, copper, bronze, cast-iron.

HSSE Co5 HSSE-Co5 steel


DIN 338 Short drill bit, cylindrical shank


 Cutting type: straight

 Cylindrical shank

 Drilling depth: 5 x diameter

 Spiral angle: 36°

 C-shape: grinding meets DIN 1412 C standard requirements

 Point angle: 130°

FOR ROTARY HAMMER

DRH7516

£59.63 **B**



 780 g

SDS-PLUS HAMMER DRILL BITS SET - 7 PIECES


- Ø 5, 6, 8 x 110 mm
 - Ø 6, 8, 10, 12 x 160 mm
- Ø 5, 6, 8 x 110 mm and Ø 6, 8, 10, 12 x 160 mm SDS-plus bits for drilling tools. Longer service life in concrete and reinforcement thanks to the stabilised head geometry and rounded cutting edges. Patented double-edge cutting design according to the bionic principle. Innovative Twinmax 3D spiral profile provides the ideal removal of drill dust.

 SDS-PLUS steel

 2 cutting edges

 Cutting type: straight

 Masonry

 Granite and marble

FOR STRAIGHT DIE GRINDERS



3 mm

QB9211

£4.81 **B**

GRINDSTONES FOR DIE GRINDER

- Grindstones on a 3 mm stem: W145, W153, W163, W170, W176



6 mm

QB9213

£7.57 **B**

GRINDSTONES FOR DIE GRINDER

- Grindstones on a 6 mm stem: W220, W187, A22, A12, A5



6 mm

QB92005

£117.48 **B**

TUNGSTEN CARBIDE ROTARY BURRS TC SET - 5 PIECES

Cylindrical shaft: Ø 6 mm. Burr: Ø 10 mm.

FOR SHEARS AND SAWS



90 mm

SAW BLADES - 10 PCS

HSS blade

24 TPI

QD924

£15.13

B

32 TPI

QD932

£15.49

B



225 mm

QD9209

£25.81

B

VARIABLE PITCH SABER SAW BLADES - 5 PCS

Teeth per inch : 10/14 TPI . Blades design to cut steel, metal and wood. Cutting capacity for wood with nails, plywood, plastic tube, carbon: from 3.2 mm to 6.35 mm. Cutting capacity for other materials (excluding metal): from 3.2 mm to 12.7 mm.

JIGSAW BLADE - 2 PCS



10 TPI. For wood.

DJS901P

£2.58

B



21 TPI. For metal.

DJS902P

£3.74

B

FOR ANGLE GRINDERS



Inclined shape

125 mm (5")

10 ZIRCON FLAP DISCS

Bore: 22,23 mm

Grain 40

DGD202610P

£42.72

B

Grain 60

DGD202618P

£42.72

B

Grain 80

DGD202626P

£42.72

B



125 mm (5")

QB905

£3.29

B

1 GRINDING DISC

Bore: 22 mm

Thickness: 6 mm

167 g



LIMITED QUANTITY!

180 mm (7")

QB907

£2.05

B

1 GRINDING DISC

Bore: 22 mm

Thickness: 6 mm

344 g



Softly inclined shape

125 mm (5")

DGD200451P

£113.92

B

25 GRINDING DISC

Bore: 22,23 mm

Thickness: 7 mm



Flat shape

125 mm (5")

DGD210229P

£93.45

B

25 EXTRA-THIN CUTTING DISCS

Bore: 22,23 mm

Thickness: 1.0 mm

FOR ANGLE GRINDERS



75 mm (3")

QB913

£1.96

B

CUT-OFF WHEEL

Bore: 10 mm

Thickness: 1.5 mm

10 g



100 mm (4")

QB914

£3.29

B

CUT-OFF WHEEL

Bore: 22 mm

Thickness: 6 mm

36 g

FOR CORDLESS OSCILLATING MULTI-TOOL



QK131K3

£11.13

B

1 BI-METAL BLADE




QK131K4

£10.24

B

1 SHOVEL BLADE




QK131K5

£12.55

B

1 SANDING PAD



QB9933V06K

£7.65

B

10 SANDING PAPER #60




QK131K6

£30.62

B

1 SEMICIRCLE HSS BLADE



QB9933V10K

£7.65

B

10 SANDING PAPER #100

FOR SANDERS



QB9327

£24.39

B

SANDING DISC FOR Ø152 MM (6") ORBITAL SANDER



15 holes



QB9403

£8.28

B

POLISHER PAD
Hard/rough 3" (75mm)
For QP113



QB9413

£8.28

B

POLISHER PAD
Medium 3" (75mm)
For QP123



QP215T26

£9.43

B

DISCS

For QP215



QB9507

£30.26

B

BUFFING PAD
For QP317



SANDING PAD Velcro pad (3" - 75mm) For QP113 & QP123



MALE
QB9303

£11.66

B



FEMALE
QB9323F

£18.07

B

FOR BELT SANDERS

10 SANDING BELTS



QB910606

For QB325
6 x 330 mm 60 g

£11.30

B

QB910608

For QB325
6 x 330 mm 80 g

£10.86

B

QB910610

For QB325
6 x 330 mm 100 g

£10.59

B

QB91106

For QB325
10 x 330 mm 60 g

£11.30

B

QB91108

For QB311
10 x 330 mm 80 g

£10.86

B

QB91110

For QB311
10 x 330 mm 100 g

£11.21

B

QB91206

For QB325
20 x 520 mm 60 g

£20.38

B

QB91208

For QB312
20 x 520 mm 80 g

£14.42

B

QB91210

For QB312
20 x 520 mm 100 g

£13.97

B

QB912006

For QB325
20 x 330 mm 60 g

£18.42

B

QB912008

For QB325
20 x 330 mm 80 g

£14.42

B

QB912010

For QB325
20 x 330 mm 100 g

£13.62

B

FOR HEAT GUN



DHG901

£13.35

B

HEAT GUN NOZZLES - 3 PCS

1 reflector nozzle, 1 flat nozzle and
1 reduction nozzle.

Material : Aluminium.

FOR HAMMERS



SC4101 ●
FLAT CHISEL
 For 10 mm round shanks

£6.14 B



SC4201 ●
FLAT CHISEL
 For 10.2 mm hex shanks

£6.59 B



SC4202 ●
SHEET METAL CUTTER
 For 10.2 mm hex shanks

£6.59 B



SC4203 ●
PUNCH CHISEL
 For 10.2 mm hex shanks

£6.59 B



SC4204 ●
SPOT WELD CHISEL
 For 10.2 mm hex shanks

£6.59 B



SC4205 ●
2 EDGE SHEET METAL CUTTER
 For 10.2 mm hex shanks

£7.39 B



SC415MA ●
SET OF ROUND CHISELS
 For 10 mm round shanks

£30.26 B



SC425 ●
SET OF HEX CHISELS
 For 10.2 mm hex shanks

£31.15 B



SC435 ●
SET OF 5 RIVET CHISELS
 For 10 mm round shanks

£59.36 B



SC9501R ●
1/2" HAMMER SOCKET ADAPTOR

£29.28 B



SC9502R ●
AIR IMPACT CHISEL MADE FOR STEERING TIE-RODS

£27.32 B



SC9503R ●
FLAT HEAD AIR IMPACT CHISEL

£19.14 B



★★● **SCO206R**

CHISEL SET - 6 PCS
 • 6 punch chisels 5,2 to 12,3 mm

£47.17 B




SC33C ●
 £47.26 B

NEEDLE RUST REMOVER ADAPTER FOR CHISELS
 19 needles Ø 3mm x 180mm.



SC34C ●
 £50.11 B

NEEDLE RUST REMOVER ADAPTER FOR CHISELS
 19 needles Ø 3mm x 180mm.

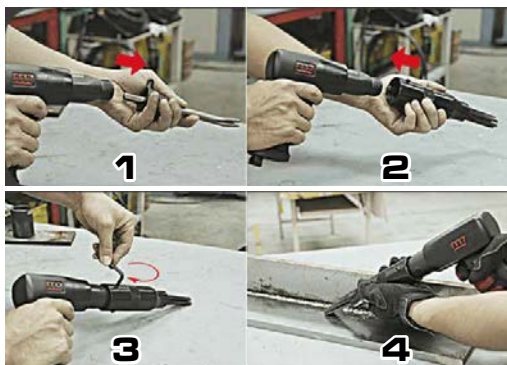

FOR NEEDLE SCALERS



SN288
 £17.62 B

SPARE NEEDLES
 For SN1288



SN268
 £24.30 B

SPARE NEEDLES
 For SN2110 / SC33C / SC34C

NEW



SN1350T06
 £11.75 B

SPARE NEEDLES
 For SN1350

FOR PNEUMATIC BLOW GUNS



JC491

£5.16

B

SPARE TIPS

Two side holes for air volume control

! Be careful, once the safety tip is set up, it cannot be withdrawn.



JC116E01

£5.16

B

VENTURI NOZZLE FOR JC116 / JC122

High flow bozzle:

Maximizes airflow for deep, concentrated cleaning.

NEW



JC116H01

£8.90

B

SIDE HOLES NOZZLE FOR JC116 / JC122

Side holes nozzle:

Creates surrounding airflow for wide-area cleaning.

FOR OSCILLATING KNIFE




57mm

QK1057

STRAIGHT BLADE

£17.36

B



8mm
16.30 mm

16.30 x 8mm

QK1008

STRAIGHT BLADE

£17.36

B



36mm

QK2036P

CURVED U-BLADE

£28.04

B



63mm

QK2063P

U-BLADE

£30.26

B



90mm

QK2090P

U-BLADE

£34.18

B



48mm

QK2030P

CURVED BLADE

£12.28

B



18mm

QK3018

U-BLADE

£27.68

B



36mm

QK3036

U-BLADE

£31.68

B

FOR SCRUBBER



QB9401

£42.54

B

HOOKED METAL BRUSH




QB9411

£29.28

B

HOOKED METAL BRUSH



QB9412

£28.66

B

STRAIGHT METAL BRUSH



QB9414

£17.98

B

RUBBER BRUSH



QB9415

£20.47

B

SCOURING WHEEL

FOR GREASE GUNS



SG212 £8.28 **B**

300 mm FLEXIBLE HOSE



SG902 £7.74 **B**

SCREW-ON TYPE GREASE
CARTRIDGE ADAPTOR FOR AIR
GREASE GUN





















Ø18 mm / Ø31 mm
For SG405 / SG407



















COUPLINGS

	M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	FOR CONNECTORS	PRICE
STANDARD COUPLINGS						
	SY1213F	R 1/4"		Ø 7.2mm	EURO	£8.90 B
	SY1233F			Ø 6mm	ISO 6150-B	£8.90 B
	SY1313F	R 3/8"		Ø 7.2mm	EURO	£8.90 B
	SY1333F			Ø 6mm	ISO 6150-B	£8.90 B
	SY1413F	R 1/2"		Ø 7.2mm	EURO	£9.79 B
	SY1433F			Ø 6mm	ISO 6150-B	£9.79 B
	SY0213M	R 1/4"		Ø 7.2mm	EURO	£8.90 B
	SY0233M			Ø 6mm	ISO 6150-B	£8.90 B
	SY0313M	R 3/8"		Ø 7.2mm	EURO	£8.90 B
	SY0333M			Ø 6mm	ISO 6150-B	£8.90 B
	SY0413M	R 1/2"		Ø 7.2mm	EURO	£9.79 B
	SY0433M			Ø 6mm	ISO 6150-B	£9.79 B
	SY3213H	Int. Ø for hose 8mm		Ø 7.2mm	EURO	£9.26 B
	SY3233H			Ø 6mm	ISO 6150-B	£9.17 B
	SY3313H	Int. Ø for hose 10mm		Ø 7.2mm	EURO	£10.41 B
	SY3333H			Ø 6mm	ISO 6150-B	£10.41 B
	SY3413H	Int. Ø for hose 13mm		Ø 7.2mm	EURO	£11.04 B
	SY3433H			Ø 6mm	ISO 6150-B	£11.04 B








































M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	FOR CONNECTORS	PRICE
DECOMPRESSION COUPLINGS					
Antistatic. Crush-Resistant. Better performance. Light and compact. High output. No "Whiplash" possible ISO 4414. Anti scratch. Flexible connection.					
	SY271F	G 1/4"	 F	Ø 6mm	ISO 6150-B £20.92 B
	SY271M	R 1/4"	 M	Ø 6mm	ISO 6150-B £24.92 B
	SY372M	R 3/8"	 M	Ø 8mm	ISO 6150-B £29.82 B
	SY471F	G 1/2"	 F	Ø 8mm	ISO 6150-B £29.37 B
DECOMPRESSION COUPLINGS					
	SY200FD	R 1/4"	 F	Ø 6mm	ISO 6150-B £9.79 B
	SY300FD	R 3/8"	 F	Ø 6mm	ISO 6150-B £9.79 B
	SY400FD	R 1/2"	 F	Ø 6mm	ISO 6150-B £10.50 B
	SY200MD	R 1/4"	 M	Ø 6mm	ISO 6150-B £9.79 B
	SY300MD	R 3/8"	 M	Ø 6mm	ISO 6150-B £9.79 B
	SY400MD	R 1/2"	 M	Ø 6mm	ISO 6150-B £10.50 B

COUPLINGS


M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	FOR CONNECTORS	PRICE
STANDARD COUPLINGS					
	SY230FD	G 1/4"	 F	Ø 6mm	ISO 6150-B £6.23 B
	SY250MD	R 1/4"	 M	Ø 6mm	ISO 6150-B £8.01 B
CLAW COUPLING (FIREFIGHTER TYPE)					
<i>Temperature resistance: -5°C ~ +60°C. Max air pressure: 10 bars. Material: brass STANDARD : NFE 29573</i>					
	SYRP4F	G 1/2"	 F	-	£10.32 B
	SYRP4M	G 1/2"	 M	-	£9.79 B
	SYRP4T	Ø int. for hose 13mm to 15mm		-	£11.93 B
REDUCER					
	SY32FM	R 3/8" ▼ G 1/4"	 M  F	-	£5.25 B
<p>3/8" Tapered male / 1/4" parallel female Brass and nickel-plated brass Operating pressure: 0 to 15 bar</p>			 <p>A : 17 mm C : 17 mm D : 5,5 mm</p>		
360° ARTICULATED CONNECTORS					
	SY2011M	R 1/4"	 M	-	£14.24 B

COUPLINGS

	M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	PROFILE	PRICE
CONNECTORS FOR QUICK COUPLINGS						
	SY251F	G 1/4"	 F	Ø 7.4mm		Pack of 2 £8.37 B
	SY281F	G 1/4"	 F	Ø 6mm		Pack of 2 £12.10 B
	SY261M	R 1/4"	 M	Ø 7.4mm		Pack of 2 £8.01 B
	SY281M	R 1/4"	 M	Ø 6mm		Pack of 2 £9.35 B
	SY261F	G 1/4"	 F	Ø 6mm		Pack of 2 £8.01 B
	SY251MD	R 1/4"	 M	Ø 6mm		Pack of 2 £3.12 B
	SY351MD	13mm 15mm R 3/8"	 M	Ø 6mm		Pack of 2 £4.81 B
	SY351F	G 3/8"	 F	Ø 8mm		Pack of 2 £15.66 B
	SY371M	R 3/8"	 M	Ø 8mm		Pack of 2 £28.57 B
	SY381M	R 3/8"	 M	Ø 6mm		Pack of 2 £8.63 B
	SY461M	R 1/2"	 M	Ø 7.4mm		Pack of 2 £12.10 B
	SY471M	R 1/2"	 M	Ø 8mm		Pack of 2 £11.57 B



G: THE LETTER G MEANS THAT THE THREAD OR TAPPING IS CYLINDRICALLY SHAPED.
G threads are only compatible with G tapping.



R: THE LETTER R MEANS THAT THE THREAD OR TAPPING IS CONICAL.
R threads are compatible with R and G tapping.

EURO EUROPEAN PROFILE
HIGH OUTPUT
USED ACROSS EUROPE

ISO 6150-B ISO 6150-B PROFILE
STANDARD OUTPUT
USED IN BENELUX, SPAIN, FRANCE,
NORWAY AND SWITZERLAND

BRITISH BRITISH PROFILE
STANDARD OUTPUT
USED IN THE UK



M7

18V DB-1850P LITHIUM-ION COMPLETELY CHARGED 20V M7



catalog.mightyseven.eu

+33 5 49 30 33 27
kingtonyeurope.com
service-clients@kingtony.eu



Offer valid until 31/12/2026. Non-contractual photographs.
King Tony Europe SAS, capital : €7,350,000,
company registration numbers: 424 737 138 - FR 26 424 737 138.
King Tony reserves the right to modify or delete references without prior notice.

